

3M™ Mini D Ribbon (MDR) Connectors

.050" Solder Plug Connector - Shielded

101 Series



- Wiper-on-wiper contact for reliable repetitive plugging
- Solder cup termination requires no special tooling
- Accepts a wide variety of discrete wire (24 to 30 AWG) cable construction
- Contacts: 14, 20, 26, 36, 40 and 50
- See Regulatory Information Appendix (RIA) for chemical compliance information

Date Modified: June 1, 2008

TS-0669-C
Sheet 1 of 2

Physical

Insulation Material: Glass Reinforced Polyester

Flammability: UL 94V-0

Color: Black

Contact Material: Copper Alloy

Plating:

Underplating: 80 μ " [2.0 μ m] Nickel

Wiping Area: Gold (see ordering information)

Solder Tail Plating: Gold Flash over Nickel (RIA E1 & C1 apply)

Shroud Material: Steel

Plating: Nickel

Wire Accomodation: 24, 26, 28 & 30 AWG

Marking: 3M Logo and Part Number

Electrical

Current Rating: 1 A

Insulation Resistance: $>1 \times 10^8 \Omega$ at 500 V_{DC}

Withstanding Voltage: 500 V_{RMS} for 1 minute

Environmental

Temperature Rating: -55°C to +105°C

Solder Process: 360°C max for 10 sec. max

UL File No.: E68080



3M™ Mini D Ribbon (MDR) Connectors


.050" Solder Plug Connector - Shielded

101 Series



Contact Quantity	Dimensions		
	A	B	C
14	.300 [7.62]	.54 [13.8]	.72 [18.2]
20	.450 [11.43]	.69 [17.6]	.87 [22.0]
26	.600 [15.24]	.85 [21.5]	1.02 [25.8]
36	.850 [21.59]	1.09 [27.8]	1.27 [32.2]
40	.950 [24.13]	1.19 [30.3]	1.37 [34.7]
50	1.200 [30.48]	1.44 [36.7]	1.62 [41.1]



20, 36 & 40 Position

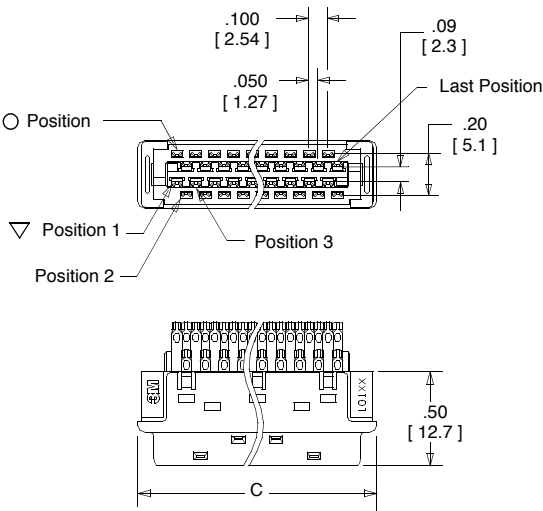

14, 26 & 50 Position

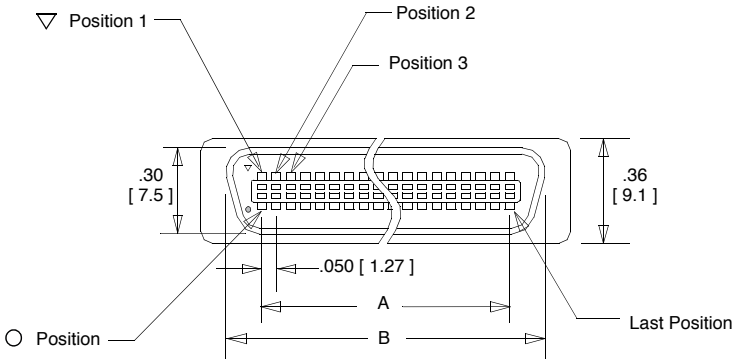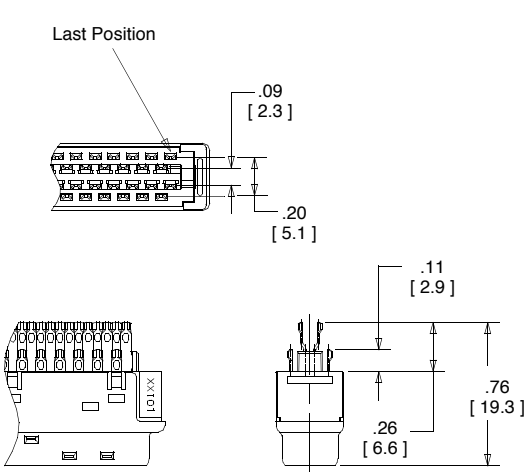

Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

[] Dimensions for Reference Only

Ordering Information



101XX - 3000PX

Contact Quantity (See Table)

Wiping Interface:
C = 30 μ" [76 μm] Min. gold
E = 20 μ" [5 μm] Min. gold

Note: This solder plug connector must be used with only 3M Non-Shielded Shell Kits 103XX-52F0-008 Series and 103XX-52A0-008 Series.

TS-0669-C
Sheet 2 of 2