



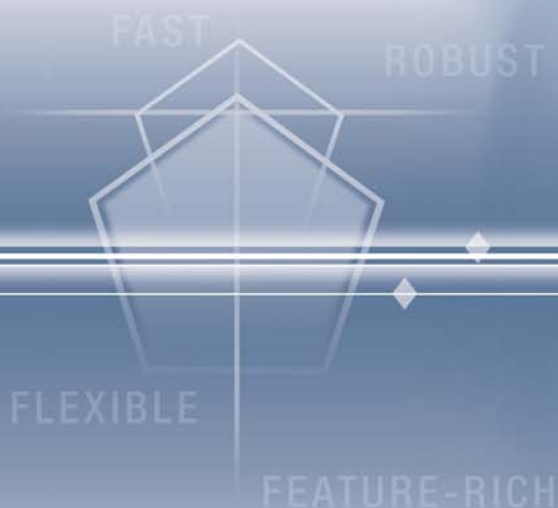

EX II Series

Touch Screen Controllers

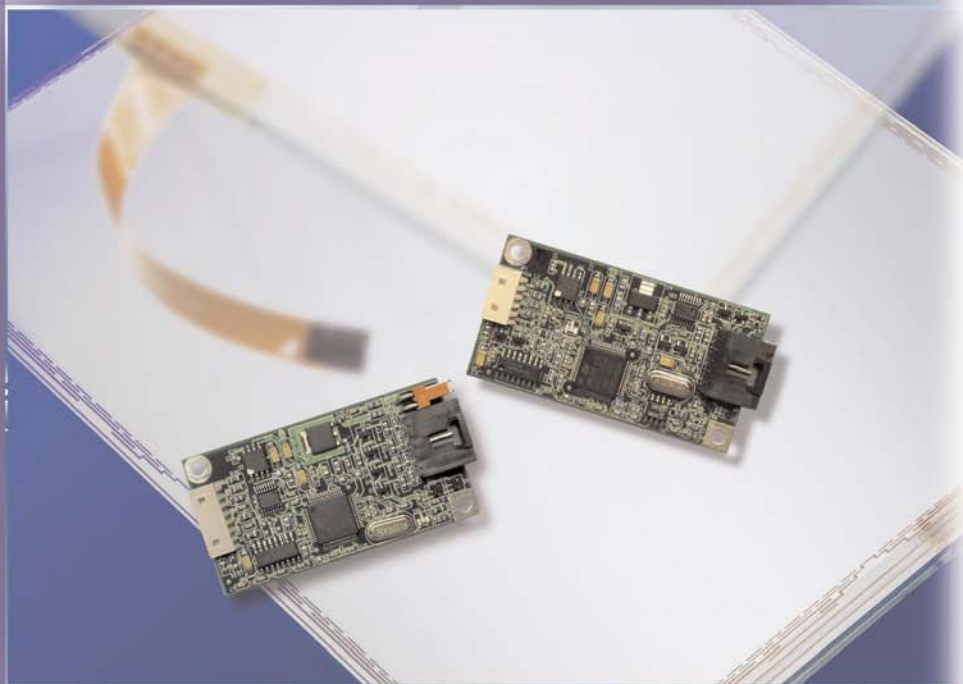

Product Highlights

- State-of-the-art accuracy and touch response
- Standard-setting ESD and EMI protection
- Firmware download capability provides flexibility
- Wide operating temperature
- High touch coordinate resolution of 16k x 16k*
- RS232 Serial and USB compliant interfaces

A World-Class Electronics Solution

The MicroTouch™ EX II Series Controllers bring flexibility and feature-rich functionality to capacitive and resistive touch screen applications. This high performance electronics platform is based on the innovative MicroTouch™ EX II ASIC, designed to provide high resolution, on-chip RAM, and a wide operating temperature range. With expanded regulatory approvals, improved power modes, and enhanced ESD and EMI protection, this controller series is a robust solution for popular touch applications.

Advanced Firmware Download Capability

Culminating decades of touch technology experience, the EX II Series electronics enables advanced firmware download capabilities, optimized for MicroTouch™ ClearTek™ II and legacy ClearTek™ touch screens. Standard factory-loaded firmware can be easily updated or replaced at some future date with downloadable, newer firmware revisions to match updated software application functionality. This field upgrade capability can mean minimal downtime for software upgrades.

* The maximum number of addressable coordinates generated by the controller

EX II Series *Touch Screen Controllers*



Images not to scale

	Serial EX II 7700SC	USB EX II 7700UC
Part Number (All parts RoHS Compliant)	EXII-7720SC (Uncased, no cable)	EXII-7710UC (uncased, no cable)
Communications Protocol	Serial RS-232	USB Rev 1.1
Additional Requirements (For uncased only)	7310101 RS-232, 96" (2.4 m) Cable, Pearl 7315050 RS-232, 23" (0.58 m) Cable, Pearl	7312256 96" (2.4 m) Cable, Pearl
Nominal Uncased Dimensions	1.30" x 2.55" x 0.45" 33.0 x 65.0 x 11.4 mm	1.30" x 2.55" x 0.45" 33.0 x 65.0 x 11.4 mm
Nominal Cased Dimensions	N/A	N/A
Touch Screen Connection	5-pin locking AMP	5-pin locking AMP
Mean Time Between Failure (MTBF)	> 700,000 hours	> 760,000 hours
Electro-Static Discharge (ESD)	± 8KV Contact, ± 27KV Air	± 8KV Contact, ± 27KV Air
Relative Humidity	0 to 95% non-condensing at +36°C	0 to 95% non-condensing at +36°C
Storage Temperature	-50° to +85° C	-50° to +85° C
Operating Temperature	-40° to +70° C	-40° to +70° C
Power Requirements (Typical)	5-12Vdc ± 5% 85 mA	5Vdc ± 5% 105 mA
Power Connection	5V through 2-pin connector on board	USB bus
Regulatory	UL/cUL, FCC-B, CE, VCCI, AS/NZS 3548, RoHS*	UL/cUL, FCC-B, CE, VCCI, AS/NZS 3548, RoHS*
Drivers	MT7 (Win 2000/XP/XPe/CE.net 4.0/5.0) TouchWare (Win 95/98/NT, Linux)	MT7 (Win 2000/XP/XPe/CE.net 4.0/5.0) TouchWare (Win 95/98/NT, Linux)
Warranty	5 Years	5 Years

* RoHS Directive Compliant

01-07



ROBUST

FLEXIBLE

FEATURE-RICH

FAST



**3M Touch Systems
3M Display & Graphics**

300 Griffin Brook Park Drive
Methuen, MA 01844
U.S.A.
1-866-407-6666
www.3M.com/touch

Worldwide Manufacturing Plants

Methuen, Massachusetts
Milwaukee, Wisconsin
Vancouver, BC Canada

**For more information
on 3M touch products,
visit 3Mtouch.com or
call toll-free 1-866-407-6666**

ROHS DIRECTIVE COMPLIANT: In accordance with **European Directive 2002/95/EC**, "RoHS Directive compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based on information provided by third party suppliers to 3M. (9/06)

NOTICE: Given the variety of factors that can affect the use and performance of a 3M Touch Systems Product (the "Product"), including that solid state equipment has operation characteristics different from electro mechanical equipment, some of which factors are uniquely within User's knowledge and control, it is essential that User evaluate the 3M Touch Systems Product and software to determine whether it is suitable for User's particular purpose and suitable for User's method of application. 3M Touch Systems' statements, engineering/technical information, and recommendations are provided for User's convenience, but their accuracy or completeness is not warranted. 3M Touch Systems products and software are not specifically designed for use in medical devices as defined by United States federal law. 3M Touch Systems products and software should not be used in such applications without 3M Touch Systems' express written consent. User should contact its sales representative if User's opportunity involves a medical device application.

IMPORTANT NOTICE TO PURCHASER: Specifications are subject to change without notice. These 3M Touch Systems' Products and software are warranted to meet their published specifications from the date of shipment and for the period stated in the specification. **3M Touch Systems makes no additional warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose.** User is responsible for determining whether the 3M Touch Systems Products and software are fit for User's particular purpose and suitable for its method of production, including intellectual property liability for User's application. If the Product, software or software media is proven not to have met 3M Touch Systems' warranty, then 3M Touch Systems' sole obligation and User's and Purchaser's exclusive remedy, will be, at 3M Touch Systems' option, to repair or replace that Product quantity or software media or to refund its purchase price. 3M Touch Systems has no obligation under 3M Touch Systems' warranty for any Product, software or software media that has been modified or damaged through misuse, accident, neglect, or subsequent manufacturing operations or assemblies by anyone other than 3M Touch Systems. **3M Touch Systems shall not be liable in any action against it in any way related to the Products or software for any loss or damages, whether non-specified direct, indirect, special, incidental or consequential (including downtime, loss of profits or goodwill) regardless of the legal theory asserted.** (7/02)