

FN 2000 SERIES

*single-phase
chassis-
mounting filters*

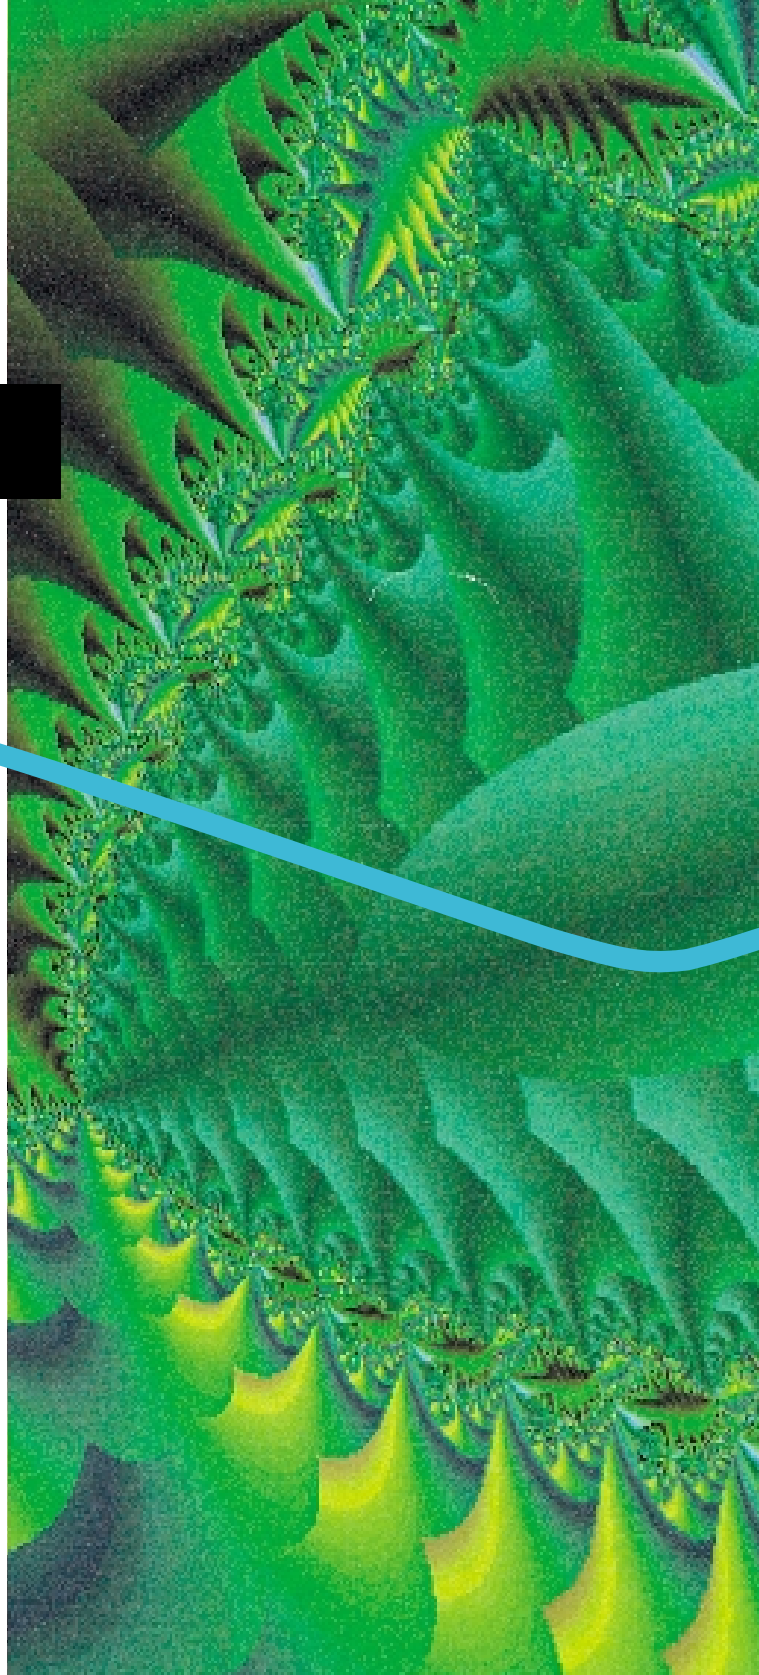

SCHAFFNER

Your number one name for EMC

Schaffner's worldwide sales, distribution and production network

HEADQUARTERS

Schaffner EMV AG
Nordstrasse 11
CH-4542 Luterbach
Switzerland
Tel: (032) 6816 626
Fax: (032) 6816 641

EUROLOGISTICS CENTER

Schaffner
1A, avenue de Suisse
F-68311 Illzach
France
Tel: (03) 89 31 04 00
Fax: (03) 89 31 04 01

FACTORIES

Schaffner EMV AG
Nordstrasse 11
CH-4542 Luterbach
Switzerland
Tel: (032) 6816 626
Fax: (032) 6816 641

Schaffner Ltd
National Technological Park
Castletroy
Limerick
Ireland
Tel: (061) 332233
Fax: (061) 332584

Schaffner EMC Co Ltd
67 Moo 4 Tambol Ban Klang
Amphur Muang PO Box 14
Lamphun 51000
Thailand
Tel: (053) 581 104
Fax: (053) 581 019

SALES SUBSIDIARIES

Schaffner Beijing Liaison Office
Room 911, Bright China Chang An Building
No. 7 Jianguomennei Dajie
Beijing 100005
China
Tel: (10) 6510 1761
Fax: (10) 6510 1763

Schaffner SA
43 rue Michel Carré
F-95103 Argenteuil
France
Tel: (01) 34 34 30 60
Fax: (01) 39 47 02 28

Rhone Alpes
F-38560 Champ sur Drac
Tel: (04) 76 68 64 00
Fax: (04) 76 68 63 70

Rennes
F-35510 Cesson-Sévigné
Tel: (02) 99 22 70 00
Fax: (02) 99 22 70 07

Schaffner EMV GmbH
Schoemperlenstrasse 12B
D-76185 Karlsruhe
Germany
Tel: (0721) 56 910
Fax: (0721) 56 9110

Northern Germany
D-59581 Warstein
Tel: (02902) 97 56 10
Fax: (02902) 97 56 80

Schaffner EMC Srl
Via Galileo Galilei, 47
I-20092 Cinisello Balsamo (MI)
Italy
Tel: (02) 66 04 30 45
Fax: (02) 61 23 943

Schaffner EMC KK
2-31-6 Kamiuma
Setagaya-Ku
Tokyo 154-0011
Japan
Tel: (03) 3418 5822
Fax: (03) 3418 3013

Schaffner EMC Pte Ltd
1200 Depot Road 06-01
Singapore 109675
Singapore
Tel: 377 3283
Fax: 377 3281

Schaffner EMC AB
Turebergstorg 1,6
S-19186 Sollentuna
Sweden
Tel: (08) 921121
Fax: (08) 929690

Schaffner Altrac AG
Mühlehaldestrasse 6
CH-8953 Dietikon
Switzerland
Tel: (01) 744 61 11
Fax: (01) 744 61 61

Schaffner EMC Ltd
Ashville Way
Molly Millar's Lane
Wokingham
Berks RG41 2PL
UK
Tel: (0118) 9770070
Fax: (0118) 9792969

Schaffner EMC Inc
9-B Fadem Road
Springfield, NJ 07081
USA
Toll free: (800) 367 5566
Tel: (973) 379 7778
Fax: (973) 379 1151

West Coast
Irvine, CA 92718
Tel: (949) 457 9400
Fax: (949) 457 9510

DISTRIBUTORS

Austria
Eurodis Electronics GmbH Tel: 1 610 620

Belgium
SEI Belgium Tel: 456 0747

Czech Republic
Energo Praga Ltd. Tel: 2 6111 2665

Denmark
Avnet Nortec A/S Tel: 44 88 08 00

Finland
Electro Ferrum Oy Tel: 19 326 616

Netherlands
SEI Benelux B.V. Tel: 76 57 22 500

Norway
Avnet Nortec A/S Tel: 66 77 36 00

Poland
Astat Sp. Tel: 61 8488 871

Spain
Selco S.A. Tel: 91 637 1011

Sweden
Avnet Nortec AB Tel: 8 629 1400

Turkey
Artest Elektronik Tel: 216 478 1757

Australia
Westek Industrial Products Pty Ltd.
Tel: 3 9369 8802

Brasil
Teknikao Ind e Com Ltda Tel: 11 834 5544

Hong Kong
Denetron (HK) Ltd. Tel: 2 707 9132

India
Vishal Agencies Tel: 40 711 2079

Israel
RDT Components Ltd. Tel: 3 645 0707

Japan
Nemic Lambda K.K. Tel: 3 3447 4411

SSR Engineering Co. Ltd. Tel: 3 3493 6613
Unidux Inc Tel: 422 32 4500

Korea
Power EMC TEK Tel: 2 501 5852

New Zealand
MHS Technologies Ltd. Tel: 4 567 7016

Republic of South Africa
Electronic Building Elements Tel: 12 803 7680


Taiwan
Bandtek Int. Co. Ltd. Tel: 2 2747 3733

Compact single-phase filters for general-purpose applications

Schaffner's FN 2000 series single-phase filters provide an extremely cost-effective solution for a wide range of general-purpose filtering requirements. Employing high performance magnetic and capacitive components, the filters have a very compact form factor, making them particularly suitable for applications where space is at a premium. All FN 2000 Series filters are provided in chassis-mounting metal housings, with a choice of fast-on, wire or screw feed-through connectors for ease of system integration. Designed for operation at up to 250VAC, the filters can handle supply frequencies from DC to 400Hz.


This filter range is available in many different standard forms in addition to those shown by the electrical schematics in this shortform catalogue. The multi-stage filters, for example, can be supplied with capacitors connected to the load side, in order to present the best impedance mismatch between equipment and filter. Further information can be obtained from our headquarters in Switzerland, or any subsidiary.

Rapid selection Using the current rating and attenuation performance indicators, this table allows you to quickly identify a filter which is potentially suitable for your application, for subsequent detailed investigation on the pages shown.

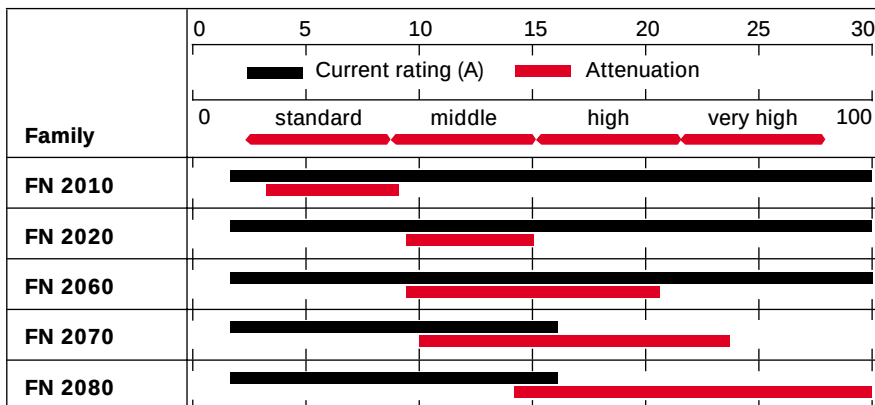

CONTENTS

Mechanical data for FN 20X0	12
FN 2010 electrical specification	2
FN 2020 electrical specification	4
FN 2060 electrical specification	6
FN 2070 electrical specification	8
FN 2080 electrical specification	10

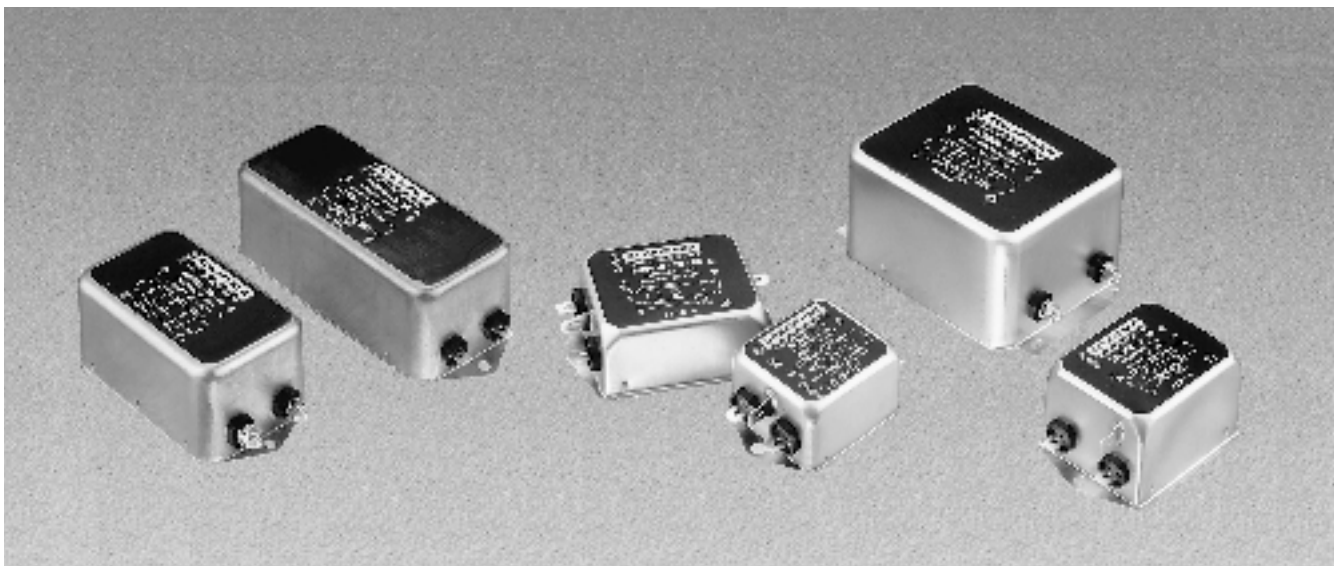

General-purpose filter

The FN 2010 family is designed to provide an economic solution for a wide variety of general-purpose filtering requirements. Available in 15 standard versions, with current ratings from 1 to 30A and a choice of three different connector styles, individual application requirements are easily and economically matched.

- current ratings from 1 to 30A
- general-purpose filtering performance
- three choices of connector style
- optional medical versions (B types)
- optional safety versions (A types)



See Mechanical Data on pages 12 - 13 for full details of housings and connections.

Filter selection table

Choose the filter **FN xxxx-x** with the required current rating and features, and add **/??** to determine input/output (line/load) connection style. Example: FN 2010-10/06 is a 10A filter with fast-on connections.

Approvals



Filter	Connections			Current ratings		Inductance		Capacitance		Resistance	Housing	Weight g
				A at 40°C (25°)		L mH		Cx μF	Cy nF	R MΩ		
FN 2010-1 /??	/06	/07	-	1	(1.15)	12		0.1	4.7	1	F3	65
FN 2010-3 /??	/06	/07	-	3	(3.45)	2.5		0.1	4.7	1	F3	65
FN 2010-6 /??	/06	/07	-	6	(6.9)	1		0.1	4.7	1	F3	65
FN 2010-10 /??	/06	/07	-	10	(11.5)	0.8		0.1	4.7	1	F2	85
FN 2010-12 /??	/06	/07	-	12	(13.8)	0.7		0.1	4.7	1	F2	85
FN 2010-16 /??	/06	/07	-	16	(18.4)	0.65		0.1	4.7	1	H2	140
FN 2010-20 /??	/06	-	/08	20	(23)	0.6		0.1	4.7	1	K1	210
FN 2010-30 /??	-	-	/08	30	(34.5)	0.67		0.47	10	1	P	470

Additional specifications and options


Filter type	Maximum operating voltage VAC Hz	Operating frequency Hz	Hipot test voltage PN→E VAC P→N VDC		MTBF Per Mil-HB-217F at 40°C 230V hours	Maximum leakage mA/phase
Standard types	250 50/60	DC to 400	2000	1700	800 000	0.4*
B medical types (no Y capacitors)	250 50/60	DC to 400	2500	1700	800 000	0.002
A safety types (lower capacitance)	250 50/60	DC to 400	2500	1700	800 000	0.040

* 1mA for 30A version


Insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1A types

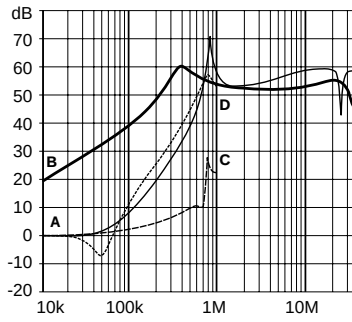


3A types

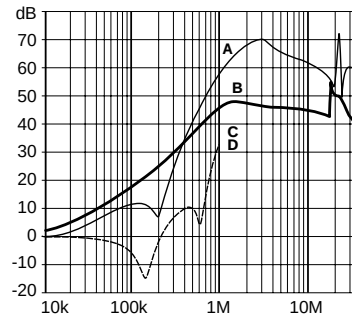


6A types

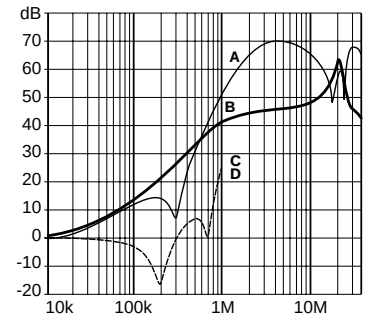


10A types (12A*)

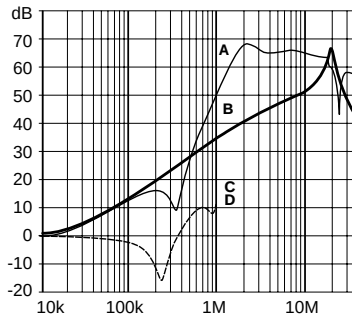


16A types

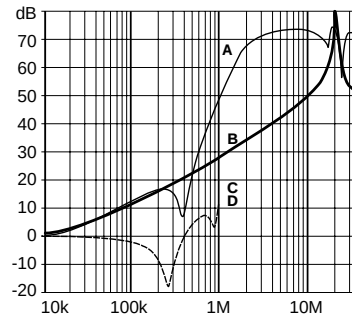

20A types

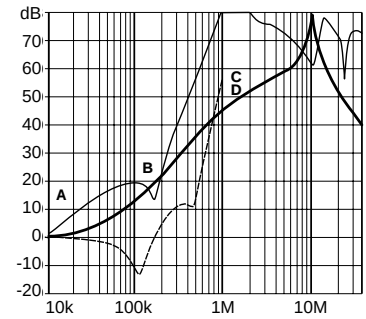


30A types

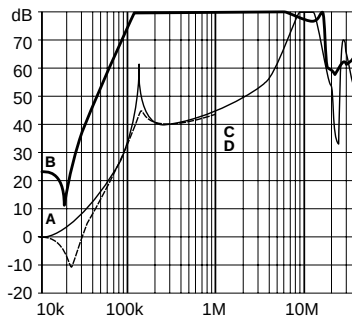

* attenuation performance of the 12A version is similar to the 10A component.

Electrical schematics

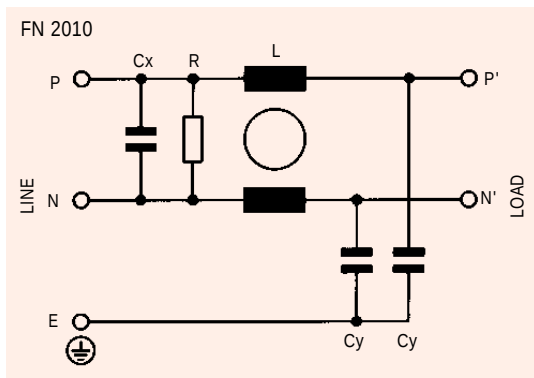

See tables for component values.

General-purpose filter

FN 2020

Similar to FN 2010, but with additional phase-to-neutral capacitance for improved differential mode performance, the FN 2020 family is designed to provide an economic solution for many general-purpose filtering requirements. Available in 15 standard versions, with current ratings from 1 to 30A, individual application requirements are easily and economically matched.



See Mechanical Data on pages 12 -13 for full details of housings and connections.

- current ratings from 1 to 30A
- high differential mode attenuation
- three choices of connector style
- optional medical versions (B types)
- optional safety versions (A types)

Filter selection table

Choose the filter **FN xxxx-x** with the required current rating and features, and add **1??** to determine input/output (line/load) connection style. Example: FN 2020-10/06 is a 10A filter with fast-on connections.

Approvals



Filter	Connections			Current ratings		Inductance		Capacitance		Resistance	Housing	Weight g
				A at 40°C (25°)		L mH		Cx μF	Cy nF	R MΩ		
FN 2020-1 1??	/06	/07	-	1	(1.15)	12		0.15	4.7	1	F2	80
FN 2020-3 1??	/06	/07	-	3	(3.45)	2.5		0.15	4.7	1	F2	80
FN 2020-6 1??	/06	/07	-	6	(6.9)	1		0.15	4.7	1	F2	80
FN 2020-10 1??	/06	/07	-	10	(11.5)	0.8		0.15	4.7	1	F2	85
FN 2020-12 1??	/06	/07	-	12	(13.8)	0.7		0.15	4.7	1	F2	85
FN 2020-16 1??	/06	/07	-	16	(18.4)	0.65		0.15	4.7	1	H2	140
FN 2020-20 1??	/06	-	/08	20	(23)	0.6		0.15	4.7	1	K1	210
FN 2020-30 1??	-	-	/08	30	(34.5)	0.67		0.47	10	0.47	P	470

Additional specifications and options


Filter type	Maximum operating voltage VAC Hz		Operating frequency Hz	Hipot test voltage PN→E VAC P→N VDC		MTBF Per Mil-HB-217F at 40°C 230V hours	Maximum leakage mA/phase
Standard types	250	50/60	DC to 400	2000	1700	600 000	0.4*
B medical types (no Y capacitors)	250	50/60	DC to 400	2500	1700	600 000	0.002
A safety types (lower capacitance)	250	50/60	DC to 400	2500	1700	600 000	0.040

* 1mA for 30A version


Insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1A types

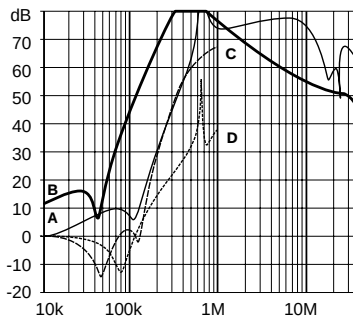


3A types

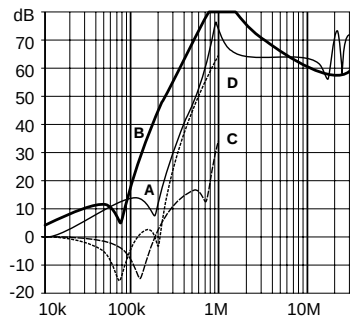


6A types

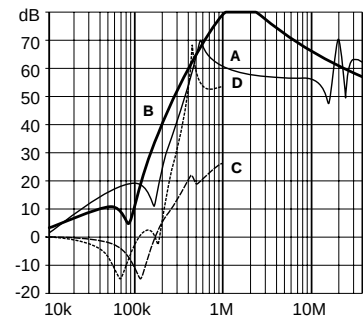


10A types (12A*)

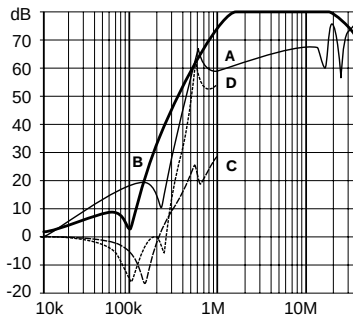


16A types

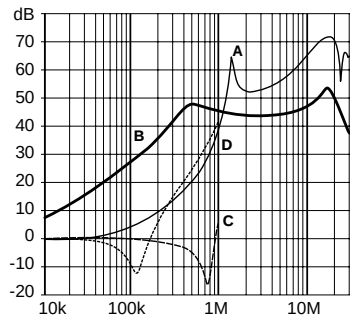

20A types

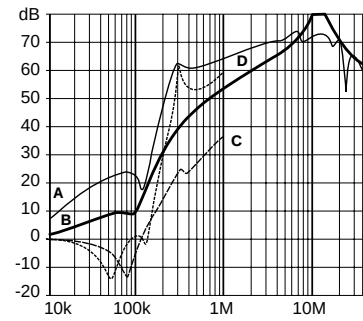


30A types

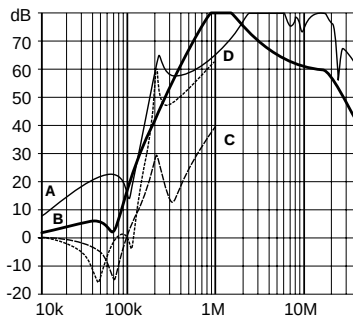

* attenuation performance of the 12A version is similar to the 10A component.

Electrical schematics

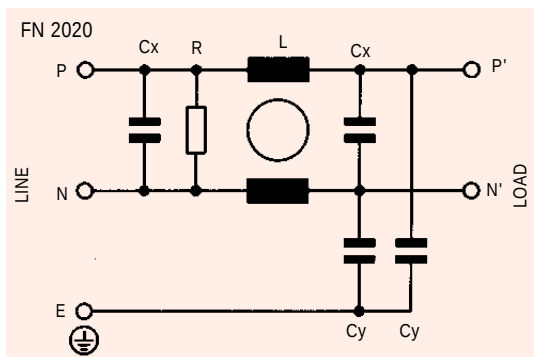

See tables for component values.

Multi-stage general-purpose filter FN 2060

Similar to FN 2020, but with additional inductance stages for higher common mode attenuation, the FN 2060 family is designed to provide an economic solution for many general-purpose filtering requirements. Available in 16 standard versions, with current ratings from 1 to 30A, individual application requirements are easily and economically matched.

- current ratings from 1 to 30A
- high differential and common mode attenuation
- three choices of connector
- optional medical versions (B types)
- optional safety versions (A types)



See Mechanical Data on pages 12 - 13 for full details of housings and connections.

Filter selection table

Choose the filter **FN xxxx-x** with the required current rating and features, and add **1??** to determine input/output (line/load) connection style. Example: FN 2060-10/08 is a 10A filter with screw feed-through connections.

Approvals



Filter	Connections			Current ratings		Inductance		Capacitance		Resistance	Housing	Weight g
				A at 40°C (25°)		L mH		Cx μF	Cy nF	R MΩ		
FN 2060-1 1??	/06	/07	-	1	(1.15)	12		0.22	4.7	1	H2	120
FN 2060-3 1??	/06	/07	-	3	(3.45)	2.5		0.22	4.7	1	H2	120
FN 2060-6 1??	/06	/07	-	6	(6.9)	0.97		0.22	4.7	1	H2	120
FN 2060-10 1??	/06	/07	-	10	(11.5)	0.8		0.47	4.7	0.47	K1	190
FN 2060-12 1??	/06	/07	-	12	(13.8)	0.58		0.47	4.7	0.47	K1	190
FN 2060-16 1??	/06	/07	/08	16	(18.4)	0.65		0.33	4.7	1	K2	260
FN 2060-20 1??	/06	-	/08	20	(23)	0.6		1	4.7	0.22	P	480
FN 2060-30 1??	-	-	/08	30	(34.5)	0.6		1	10	0.22	L2	950

Additional specifications and options


Filter type	Maximum operating voltage VAC Hz		Operating frequency Hz	Hipot test voltage PN→E VAC P→N VDC		MTBF Per Mil-HB-217F at 40°C 230V hours	Maximum leakage mA/phase
Standard types	250	50/60	DC to 400	2000	1700	450 000	0.4*
B medical types (no Y capacitors)	250	50/60	DC to 400	2500	1700	450 000	0.002
A safety types (lower capacitance)	250	50/60	DC to 400	2500	1700	450 000	0.040

* 1mA for 30A version


Insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1A types

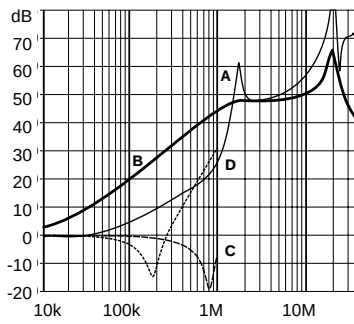


3A types

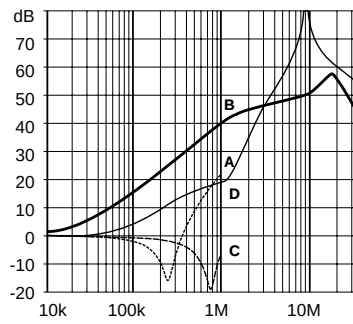


6A types

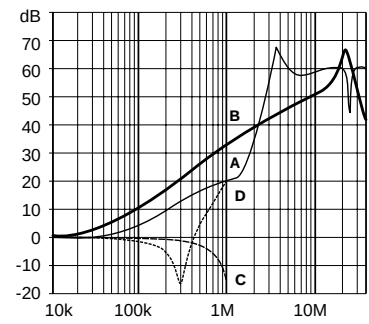


10A types (12A*)

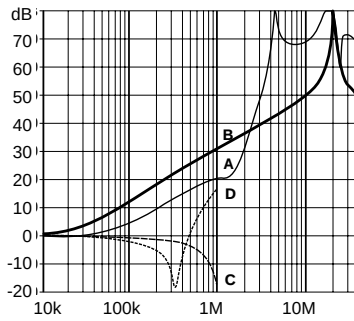


16A types

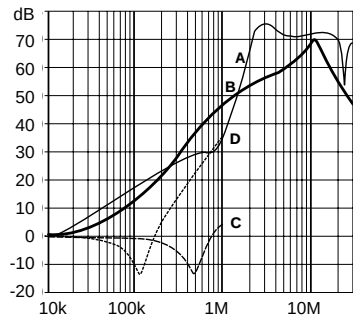

20A types

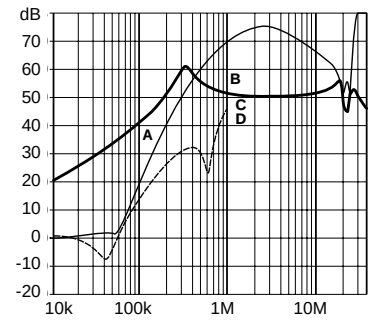


30A types

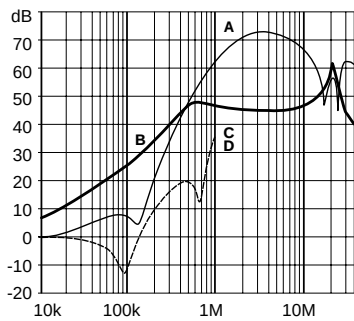

* attenuation performance of the 12A version is similar to the 10A component.

Electrical schematics

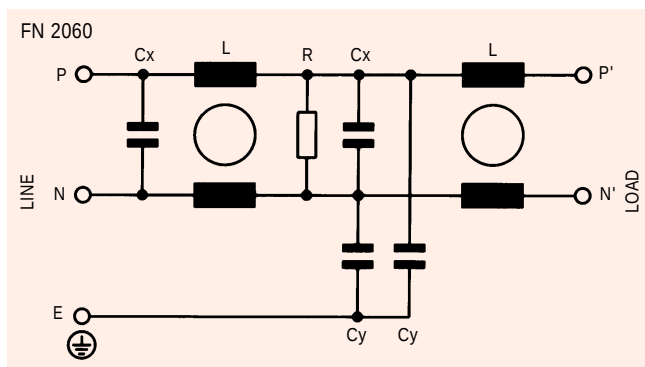

See tables for component values.

FN 2070

Multi-stage performance filter

Similar to FN 2060, but with even higher inductance and capacitance values for excellent differential and common mode attenuation - especially at high frequencies - the FN 2070 family is designed to provide a cost-effective solution for broadband filtering requirements. Available in 13 standard versions, with current ratings from 1 to 16A, the filters are ideal for use with precision instrumentation, switched-mode power supplies and motor drives.

- current ratings from 1 to 16A
- very high differential and common mode attenuation
- good high-frequency attenuation
- three choices of connector
- optional medical versions (B types)
- optional safety versions (A types)



See Mechanical Data on pages 12 - 13 for full details of housings and connections.

Filter selection table

Choose the filter **FN xxxx-x** with the required current rating and features, and add **I??** to determine input/output (line/load) connection style. Example: FN 2070-10/06 is a 10A filter with fast-on connections.

Approvals



Filter	Connections			Current ratings		Inductance		Capacitance		Resistance	Housing	Weight g
				A at 40°C (25°)		L mH		Cx μF	Cy nF	R MΩ		
FN 2070-1 I??	/06	/07	-	1	(1.15)	22		0.33	4.7	1	K1	190
FN 2070-3 I??	/06	/07	-	3	(3.45)	9.8		0.47	4.7	0.47	K2	250
FN 2070-6 I??	/06	/07	-	6	(6.9)	7.8		1	4.7	0.22	P	450
FN 2070-10 I??	/06	/07	-	10	(11.5)	4.5		1	4.7	0.22	Q	730
FN 2070-12 I??	/06	/07	-	12	(13.8)	3.25		1	4.7	0.22	Q	730
FN 2070-16 I??	/06	/07	/08	16	(18.4)	2.8		1	4.7	0.22	L2	1000


Additional specifications and options

Filter type	Maximum operating voltage VAC Hz		Operating frequency Hz	Hipot test voltage PN→E VAC P→N VDC		MTBF Per Mil-HB-217F at 40°C 230V hours	Maximum leakage mA/phase
Standard types	250	50/60	DC to 400	2000	1700	400 000	0.4
B medical types (no Y capacitors)	250	50/60	DC to 400	2500	1700	400 000	0.002
A safety types (lower capacitance)	250	50/60	DC to 400	2500	1700	400 000	0.040


Insertion loss

Per CISPR 17; A = $50\Omega/50\Omega$ sym, B = $50\Omega/50\Omega$ asym, C = $0.1\Omega/100\Omega$ sym, D = $100\Omega/0.1\Omega$ sym


1A types

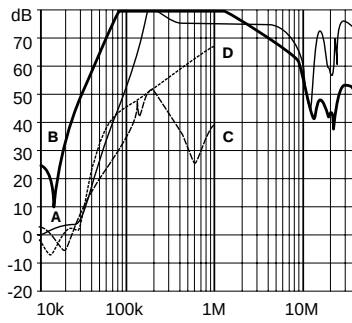


3A types

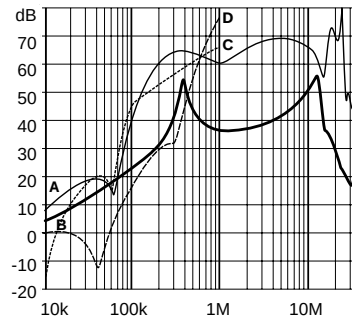


6A types

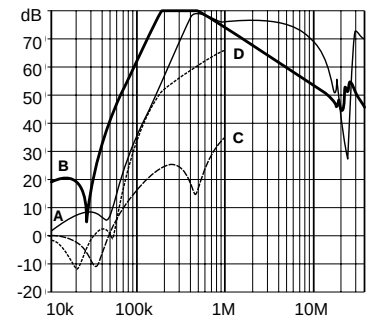

10A types (12A*)

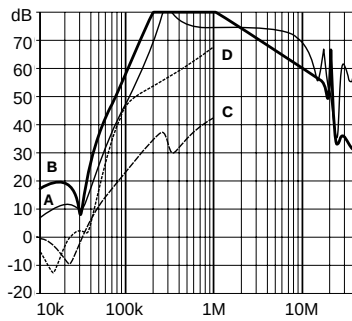


16A types

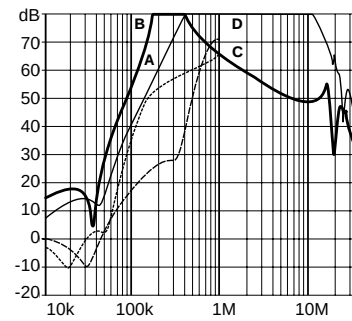

* attenuation performance of the 12A version is similar to the 10A component.

Electrical schematics

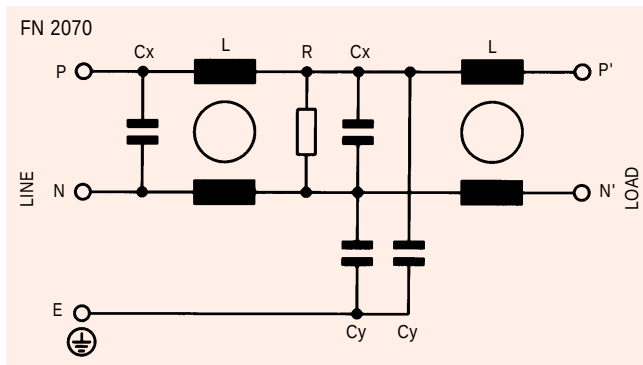

See tables for component values.

Multi-stage high-performance filter FN 2080

Similar to FN 2070, but employing independent differential mode chokes rather than common mode chokes in the second stage, the FN 2080 family of filters provides excellent broadband attenuation, including low frequencies. Available in 13 standard versions, with current ratings from 1 to 16A, the filters are ideal for protecting against very high levels of interference, such as in noisy power supplies.



See Mechanical Data on pages 12 -13 for full details of housings and connections.

- current ratings from 1 to 16A
- very high differential and common mode attenuation
- good low-frequency attenuation
- three choices of connector
- optional medical versions (B types)
- optional safety versions (A types)

Filter selection table

Choose the filter **FN xxxx-x** with the required current rating and features, and add **I??** to determine input/output (line/load) connection style. Example: FN 2080-10/06 is a 10A filter with fast-on connections.

Approvals



Filter	Connections			Current ratings		Inductance		Capacitance		Resistance	Housing	Weight g
				A at 40°C (25°)		L mH	L1	Cx μF	Cy nF	R MΩ		
FN 2080-1 I??	/06	/07	-	1	(1.15)	22	0.49	0.33	4.7	1	K1	200
FN 2080-3 I??	/06	/07	-	3	(3.45)	9.8	0.16	0.47	4.7	0.47	K2	270
FN 2080-6 I??	/06	/07	-	6	(6.9)	7.8	0.11	1	4.7	0.22	P	470
FN 2080-10 I??	/06	/07	-	10	(11.5)	4.5	0.06	1	4.7	0.22	Q	750
FN 2080-12 I??	/06	/07	-	12	(13.8)	3.25	0.05	1	4.7	0.22	Q	750
FN 2080-16 I??	/06	/07	/08	16	(18.4)	2.8	0.043	1	4.7	0.22	L2	1020


Additional specifications and options

Filter type	Maximum operating voltage VAC Hz		Operating frequency Hz	Hipot test voltage PN→E VAC P→N VDC		MTBF Per Mil-HB-217F at 40°C 230V hours	Maximum leakage mA/phase
Standard types	250	50/60	DC to 400	2000	1700	350 000	0.4
B medical types (no Y capacitors)	250	50/60	DC to 400	2500	1700	350 000	0.002
A safety types (lower capacitance)	250	50/60	DC to 400	2500	1700	350 000	0.040


Insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1A types

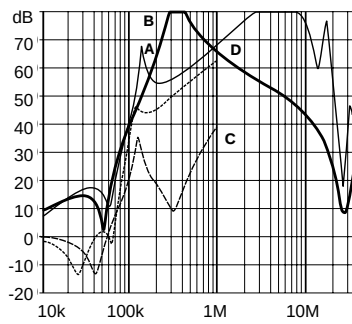


3A types

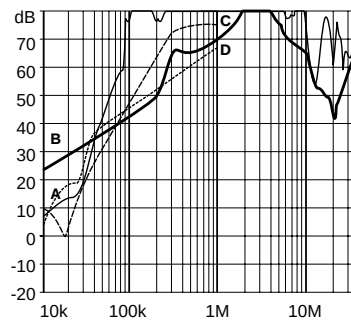


6A types

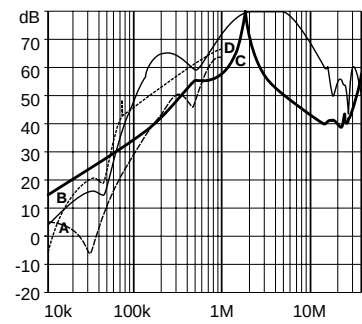

10A types (12A*)

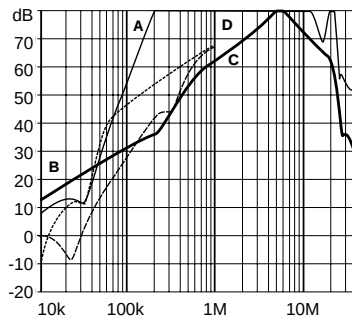


16A types

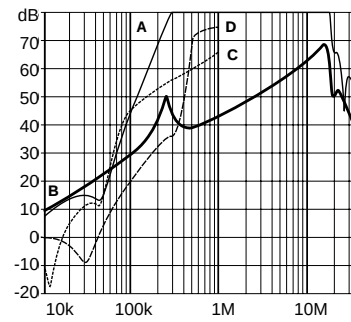

* attenuation performance of the 12A version is similar to the 10A component.

Electrical schematics

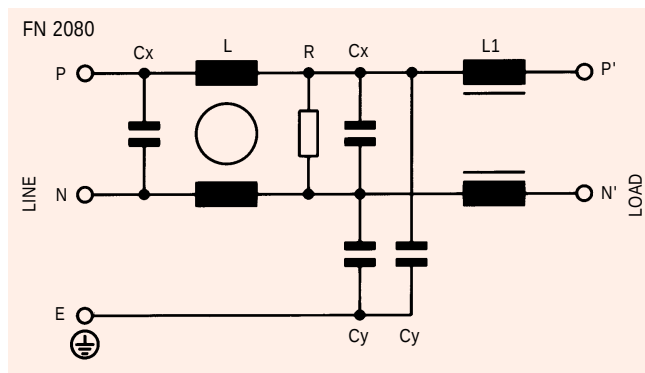

See tables for component values.

Housing style	F2	F3	H2	K1	K2	Tol.* ± mm
A	64 ± 0.3		71	85		± 0.5
B	35		46.6	54		± 0.5
C	29.3	24.3	29.3	30.3	40.3	± 0.5
D	43.5		50.5	64.8		± 0.5
F	54		61	75		± 0.3
J	21		21	27		± 0.2
K	8.3 [§] /9.3		10.8/8.3 [§]	12.3/8.3 [§]		± 0.5
L	15.3		19.3	20.8/23.3	29.8	± 0.5
M	5.3		5.3			± 0.1
N	6.3		6.3			± 0.1
P	0.7		0.7			± 0.1
S			20.1/30.5 [§]	19.9/34.9 [§] /21.4 [†]	11.4/34.9 [§]	± 0.5


All dimensions in mm; 1 inch = 25.4mm.

§ with /07 connections


† with /08 connections

* Measurements share this common tolerance unless otherwise stated.

SIDE

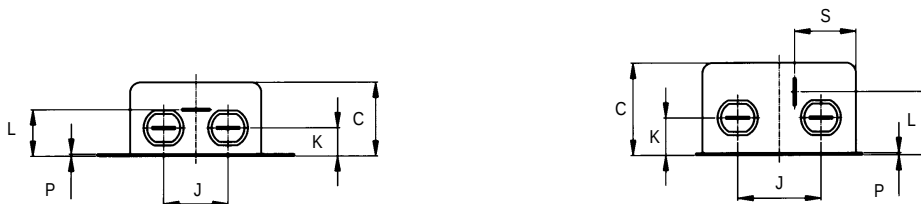

TOP

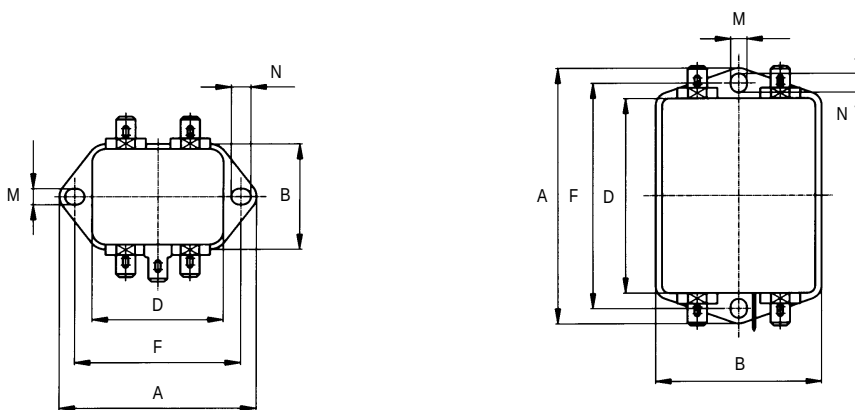

Housings F2 and F3

Housings H2, K1 and K2


Mechanical Data

I/O connections


Housing style	P		Q	L2	Tol.* ± mm
A	113.5		156	119 ± 0.5	± 1
B	57.5			85.5	± 1
C	45.4 ± 1.2			57.6	± 1
D	94		130.5	98.5	± 1
F	103		143	109	± 0.3
J	25			40	± 0.2
K	12.4/8.4 [§]			15.6/8.6 [§]	± 0.5
L	32.4				± 0.5
M	4.4		5.3	4.4	± 0.1
N	6			7.4	± 0.1
P	0.9			1.2	± 0.1
Q				66	± 0.3
R				51	± 0.2
S	15.5/38 [§]				± 0.5

All dimensions in mm; 1 inch = 25.4mm. § with /07 connections * Measurements share this common tolerance unless otherwise stated.

SIDE

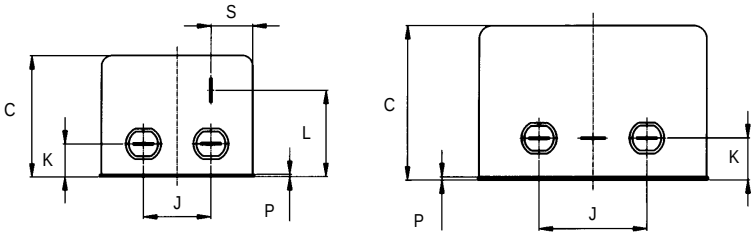

TOP

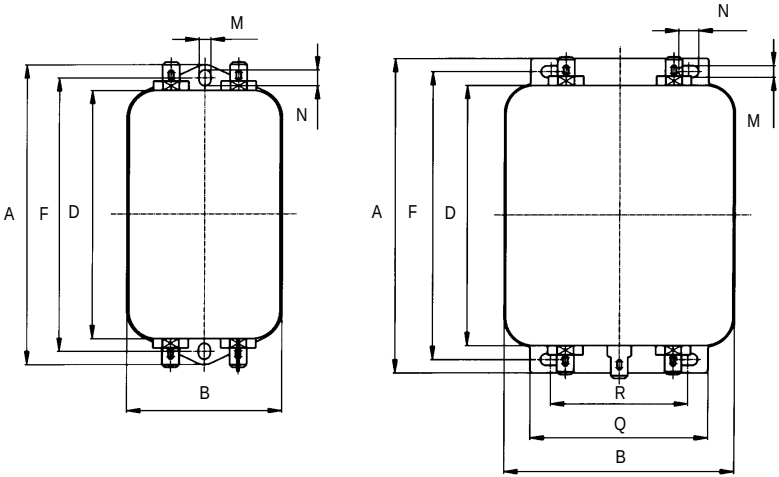


Housings P and Q


Housing L2

These are the standard types of input and output connections available for Schaffner's range of filter families.


Schaffner can also produce filters with other popular output connectors, or user-specific interfaces, to custom order. Please call your local sales office to discuss requirements.

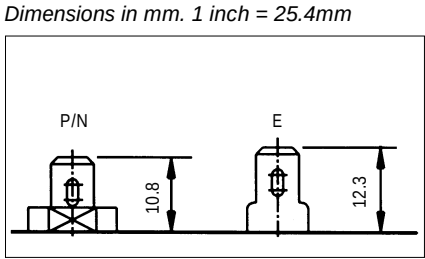

Type /06
Industry-standard size fast-on which may also be used as a solder lug, 6.3 x 0.8mm.

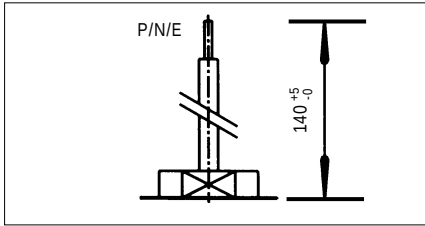

Type /07
Insulated wire, stripped ready for soldering. Wire gauge varies according to filter.

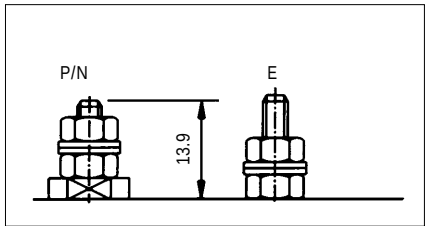

Type /08
M4 screw

Cross reference list
AWG to copper area in mm²

Current ratings	AWG number	Cu mm ² (approx)
1-3A	20	0.54
6-10A	18	0.83
12-16A	16	1.34



SCHAFFNER

Schaffner EMV AG CH-4542 Luterbach, Switzerland
Tel: [+41] (32) 6816 626 Fax: [+41] (32) 6816 641 www.schaffner.com



690-407E

Benteli Hallwag/January 1999

© 1995 Schaffner EMV. Specifications subject to change without notice. All trademarks recognised.



Schaffner is an ISO-registered company. Its products are designed and manufactured under the strict quality requirements of the ISO 9001 standard.

This document has been carefully checked. However, Schaffner does not assume any liability for errors or inaccuracies.