

Three-Phase Filters FN 258


Book-style EMC/RFI Filter for Three-phase Inverters and Power Drive Systems

SCHAFNER
energy efficiency and reliability



- Industry standard EMC solution for three-phase PDS filtering
- Slim space-saving book-style housing
- Solid safety connector blocks or optional wire output connections
- Excellent attenuation performance
- HV versions for up to 690VAC
- HVIT versions for IT distribution networks
- P/L versions with low leakage current


Approvals

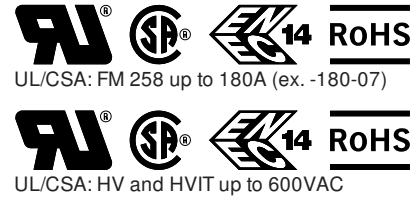

Technical specifications

Maximum continuous operating voltage:	3x 480/277VAC (FN 258, FN 258L, FN 258P) 3x 690/400VAC (FN 258HV, FN 258HVIT)
Operating frequency:	dc to 60Hz
Rated currents:	7 to 250 A @ 50 °C (480V filters)
High potential test voltage:	P → E 2650VDC for 2 sec (480V filters) P → P 2100VDC for 2 sec (480V filters) P → E 3100VDC for 2 sec (690V filters) P → P 3000VDC for 2 sec (690V filters)
Protection category:	IP20
Overload capability:	4x rated current at switch on, 1.5x rated current for 1 minute, once per hour
Temperature range (operation and storage):	-25 °C to +100 °C (25/100/21)
Flammability corresponding to:	UL 94V-2 or better
Design corresponding to:	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
Information under the labels:	UL/CSA: HV and HVIT up to 600VAC
MTBF @ 50 °C/400V (Mil-HB-217F):	220,000 hours

Typical electrical schematic

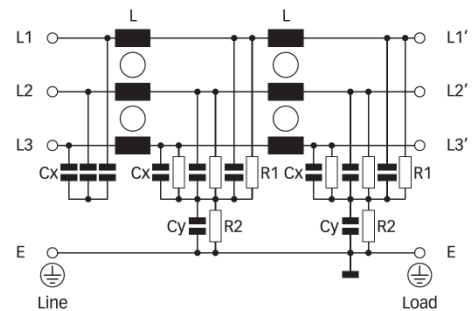

Note: HVIT versions without discharge resistor to ground.

Features and benefits

- FN 258 range of filters provides state-of-the-art EMI attenuation based on an innovative multi-stage filter topology. They help to ensure compliance with Class A or even Class B limits.
- The slim book-style shape allows a convenient and space-saving installation next to inverters and motor drives.
- With 480VAC rating and filter modules from 7 to 250A, FN 258 are ready for the most diverse applications worldwide.
- FN 258HV filters up to 130A are designed for 690VAC distribution networks.
- FN 258HVIT filters up to 130A meet the special requirements for the application in industrial 690VAC IT distribution networks.
- FN 258L and FN 258P filters help to fulfill tough requirements in respect of leakage current limitation and provide an excellent solution to overcome problems with nuisance tripping of sensitive earth leakage detectors.

Typical applications

- Three-phase variable speed drives and power drive systems (PDS)
- IT power distribution networks (FN 258HVIT)
- Applications comprising energy conversion devices (inverters, converters)
- Process automation equipment
- Three-phase power supplies and UPS
- Applications with low-leakage current requirements (FN 258L and FN 258P)

Filter selection table

Filter*	Rated current @ 50 °C (40 °C)	Typical drive power rating**	Leakage current*** @ 440VAC/50Hz	Power loss @ 25 °C/50Hz	Input connections	Output connections	Weight
	[A]	[kW]	[mA]	[W]			[kg]
FN 258-7-..	7 (7.7)	4	16.5	9	-29	-07 -29	1.0
FN 258-16-..	16 (17.5)	7.5	18.3	20	-29	-07 -29	1.4
FN 258-30-..	30 (33)	15	24.2	21	-33	-07 -33	1.7
FN 258-42-..	42 (46)	22	25.8	30	-33	-07 -33	2.5
FN 258-55-..	55 (60)	30	25.8	30	-34	-07 -34	2.9
FN 258-75-34	75 (82)	37	25.8	24	-34	-34	3.9
FN 258-100-35	100 (110)	55	25.8	51	-35	-35	5.5
FN 258-130-35	130 (143)	75	30.0	50	-35	-35	6.9
FN 258-180-..	180 (197)	90	30.0	73	-40	-07 -40	11.0
FN 258-250-..	250 (275)	132	30.0	79	-40	-07 -40	12.0
FN 258HV-7-29	7 (7.7)	5.5	13.0	9	-29	-29	1.0
FN 258HV-16-29	16 (17.5)	11	19.0	20	-29	-29	1.5
FN 258HV-30-33	30 (33)	22	19.0	21	-33	-33	1.8
FN 258HV-42-33	42 (46)	30	21.6	30	-33	-33	2.6
FN 258HV-55-34	55 (60)	45	21.6	30	-34	-34	3.0
FN 258HV-75-34	75 (82)	55	21.6	24	-34	-34	4.3
FN 258HV-100-35	100 (110)	90	21.6	51	-35	-35	5.6
FN 258HV-130-35	130 (143)	110	25.0	50	-35	-35	7.1
FN 258HVIT-7-29	7 (7.7)	5.5	13.0	9	-29	-29	1.0
FN 258HVIT-16-29	16 (17.5)	11	19.0	20	-29	-29	1.5
FN 258HVIT-30-33	30 (33)	22	19.0	21	-33	-33	1.8
FN 258HVIT-42-33	42 (46)	30	21.6	30	-33	-33	2.6
FN 258HVIT-55-34	55 (60)	45	21.6	30	-34	-34	3.0
FN 258HVIT-75-34	75 (82)	55	21.6	24	-34	-34	4.3
FN 258HVIT-100-35	100 (110)	90	21.6	51	-35	-35	5.6
FN 258HVIT-130-35	130 (143)	110	25.0	50	-35	-35	7.1
FN 258L-7-..	7 (7.7)	4	0.8	9	-29	-07 -29	1.0
FN 258L-16-..	16 (17.5)	7.5	0.8	20	-29	-07 -29	1.4
FN 258L-30-..	30 (33)	15	0.8	21	-33	-07 -33	1.7
FN 258L-42-..	42 (46)	22	0.7	30	-33	-07 -33	2.5
FN 258L-55-..	55 (60)	30	0.7	30	-34	-07 -34	2.9
FN 258L-75-34	75 (82)	37	0.7	24	-34	-34	3.9
FN 258L-100-35	100 (110)	55	0.7	51	-35	-35	5.5
FN 258L-130-35	130 (143)	75	0.7	50	-35	-35	6.9
FN 258L-180-..	180 (197)	90	0.7	73	-40	-07 -40	11.0
FN 258L-250-07	250 (275)	132	0.7	79	-40	-07 -40	12.0
FN 258P-7-..	7 (7.7)	4	3.3	9	-29	-07 -29	1.0
FN 258P-16-..	16 (17.5)	7.5	3.3	20	-29	-07 -29	1.4
FN 258P-30-..	30 (33)	15	3.3	21	-33	-07 -33	1.7
FN 258P-42-..	42 (46)	22	3.5	30	-33	-07 -33	2.5
FN 258P-55-..	55 (60)	30	3.5	30	-34	-07 -34	2.9
FN 258P-75-34	75 (82)	37	3.5	24	-34	-34	3.9
FN 258P-100-35	100 (110)	55	3.5	51	-35	-35	5.5
FN 258P-130-35	130 (143)	75	3.5	50	-35	-35	6.9
FN 258P-180-..	180 (197)	90	3.5	73	-40	-07 -40	11.0
FN 258P-250-07	250 (275)	132	3.6	79	-40	-07 -40	12.0

* To compile a complete part number, please replace the -.. with the required output connection style.


** Calculated at rated current, 440VAC (FN 258) / 690VAC (FN 258HV) and $\cos \phi = 0.8$. The exact value depends upon the efficiency of the drive, the motor and the entire application.

*** Maximum leakage under normal operating conditions (FN 258 at 440V, FN 258HV at 690V). Note: if two phases are interrupted, worst case leakage could reach 5.7 times higher levels.


Typical filter attenuation

Per CISPR 17; A = 50Ω/50Ω sym; B = 50Ω/50Ω asym; C = 0.1Ω/100Ω sym; D = 100Ω/0.1Ω sym


7 to 30A types




42 to 100A types



130A types




180 and 250A types




Note: typical attenuation performance of FN 258 standard filters. The behavior of FN 258HV, FN 258HVIT, FN 258P and FN 258L may be slightly different.

Mechanical data


7 to 55A types (-07)

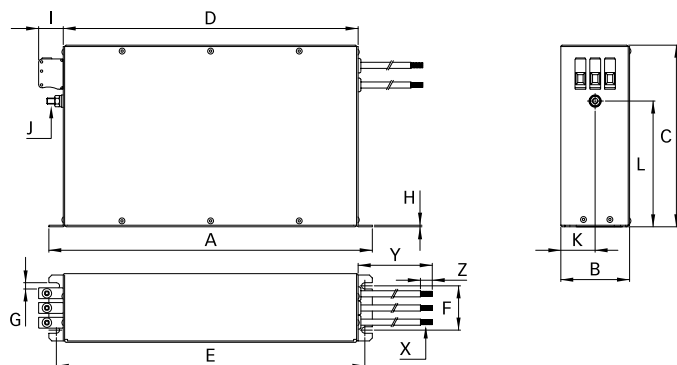


7 to 130A types (-29, -33, -34, -35)

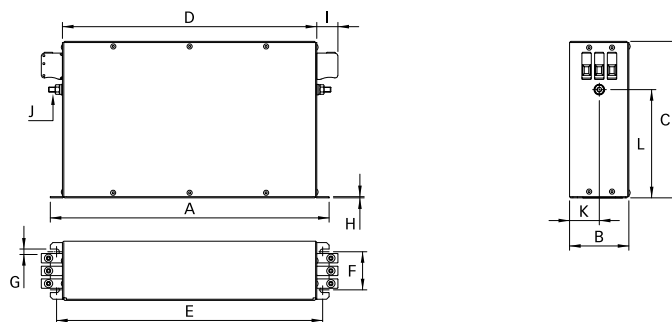

180 and 250A types (-07)

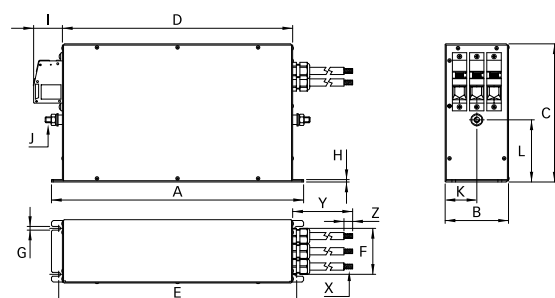

180 and 250A types (-40)

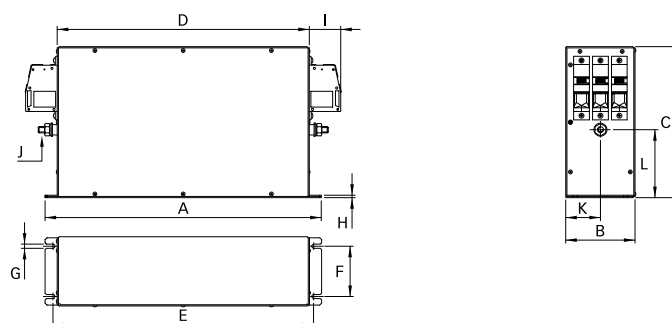

Note: in favour of a better readability, connectors and earth studs are not shown in the horizontal projection.

Note: in favour of a better readability, connectors and earth studs are not shown in the horizontal projection.

Dimensions

	7A	16A	30A	42A	55A	75A	100A	130A	180A	250A
A	255	305	335	329	329	329	379	439	438	478
B	50	55	60	70	80	80	90	110	110	110
C	126	142	150	185	185	220	220	240	240	240
D	225	275	305	300	300	300	350	400	400	440
E	240	290	320	314	314	314	364	414	413	453
F	25	30	35	45	55	55	65	80	80	80
G	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
H	1	1	1	1.5	1.5	1.5	1.5	3	4	4
I	10.9	10.9	25	25	39	39	45	45	51	51
J	M5	M5	M5	M6	M6	M6	M10	M10	M10	M10
K	25	27.5	30	35	40	40	45	55	55	55
L	85	100	110	130	105	140	130	140	110	110
X*	AWG 16	AWG 14	AWG 10	AWG 8	AWG 6				50mm ²	70mm ²
Y*	300 ±10	300 ±10	400 ±10	500 ±10	500 ±10				500 ±10	500 ±10
Z*	9	9	9	12	12				15	15

* Filters with output wire connections (-07) only.
All dimensions in mm; 1 inch = 25.4mm
Tolerances according: ISO 2768-m / EN 22768-m

Filter input/output connector cross sections

	-29	-33	-34	-35	-40
Solid wire	6mm ²	16mm ²	35mm ²	50mm ²	95mm ²
Flex wire	4mm ²	10mm ²	25mm ²	50mm ²	95mm ²
AWG type wire	AWG 10	AWG 6	AWG 2	AWG 1/0	AWG 4/0
Recommended torque	0.6 - 0.8Nm	1.5 - 1.8Nm	4.0 - 4.5Nm	7 - 8Nm	17 - 20Nm

Please visit www.schaffner.com to find more details on filter connectors.

Your local partner: To find your local partner within Schaffner's global network, please go to www.schaffner.com

**Headquarters, global innovation
and development center**

Schaffner Group

Nordstrasse 11
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 30
info@schaffner.com
www.schaffner.com

To find your local partner within
Schaffner's global network, please go
to www.schaffner.com

© 2012 Schaffner Group
Specifications are subject to change
without notice. The latest version of the
data sheets can be obtained from the
website. All trademarks recognized.

Schaffner is an ISO-registered
company.

Its products are designed and
manufactured under the strict quality
and environmental requirements of
the ISO 9001 and ISO 14001
standards.

This document has been carefully
checked. However, Schaffner does not
assume any liability for errors or
inaccuracies.

Sales and application centers

China

Schaffner EMC Ltd. Shanghai
T20-3, No 565 Chuangye Road
Pudong New Area
201201 Shanghai
T +86 21 3813 9500
F F +86 21 3813 9501 / 02
cschina@schaffner.com
<http://www.schaffner.com.cn/>

Finland

Schaffner Oy
Sauvonrinne 19 H
08500 Lohja
T +358 19 35 72 71
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.
112, Quai de Bezons
Boîte postale 133
95103 Argenteuil
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH
Westring 18
33142 Büren
T +49 2951 60 01 0
F +49 2951 60 01 23
buerealsales@schaffner.com

Italy

Schaffner EMC S.r.l.
Via Galileo Galilei 47
20092 Cinisello Balsamo (MI)
T +39 02 66 04 30 45/47
F +39 02 61 23 943
italysales@schaffner.com

Japan

Schaffner EMC K.K.
1-32-12, Kamiyama, Setagaya-ku
7F Mitsui-seimei Sangeriya Bldg.
154-0011 Tokyo
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
<http://www.schaffner.jp>

Singapore

Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1
05-09 Kampong Ubi Industrial Estate
408705 Singapore
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España
Calle Caléndula 93, Miniparc III, Edificio E
El Soto de la Moraleja Alcobendas
28109 Madrid
T +34 618 176 133
spainsales@schaffner.com

Sweden

Schaffner EMC AB
Turebergstorg 1, 6
19147 Sollentuna
T +46 8 5792 1121 / 22
F +46 8 92 96 90
swedensales@schaffner.com

Switzerland

Schaffner EMV AG
Nordstrasse 11
4542 Luterbach
T +41 32 6816 626
F +41 32 6816 641
sales@schaffner.ch

Taiwan R.O.C.

Schaffner EMV Ltd.
6 Floor, No. 413
Rui Guang Road
114 Neihu District Taipei City
T +886 2 87525050
F +886 2 87518086
taiwansales@schaffner.com

Thailand

Schaffner EMC Co. Ltd.
Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang Amphur Muang
P.O. Box 14
51000 Lamphun
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

UK

Schaffner Ltd.
5 Ashville Way
Molly Millars Lane Wokingham
RG41 2PL Berkshire
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com
<http://www.schaffner.uk.com>

USA

Schaffner EMC Inc.
52 Mayfield Avenue
08837 Edison
T 1-800-367-5566
T 732-225-9533
F 732-225-4789
usasales@schaffner.com
<http://www.schaffner.com/us>