

GLOBAL SALES OFFICES

America

Hypertronics Corporation

16 Brent Drive
Hudson, MA 0174, USA
t: +1 (0) 978 5680451
f: +1 (0) 978 5680680
e: info@hypertronics.com

Asia

Hypertac China

Unit F1, 7th Floor,
East Ocean Center
Phase II, No.618 Yan'An Road East
Shanghai, China 200001
t: +86 21 3318 4650
f: +86 21 5385 5377
e: infochina@hypertronics.com

Hypertac India

c/o John Crane Sealing Systems
India Pvt. Ltd.
No.11, 1st Phase Peenya
Industrial Area,
Bangalore-560058, India
t: +91 80 2839 2200
f: +91 80 2839 8205/06
e: info@hypertac.fr

Hypertac Japan

Toward-senju No.1, 801, Senju 3-6,
Adachi, Tokyo, Japan, 120-0034
t: +81-3-3870-8205
f: +81-3-3870-8264
e: info.japan@hypertac.it

Russia

Hypertronics Corporation

c/o John Crane Sealing Systems
B.Afanasyevsky per., 41A
Moscow 119019 Russia
t / f: +78452 462149
e: inforussia@hypertronics.com

Europe

Hypertac Limited

36 Waterloo Road
London NW2 7UH, UK
t: +44 (0) 20 8450 8033
f: +44 (0) 20 8208 4114
e: info@hypertac.co.uk

Hypertac SpA

Via P.D. Da Bissone 7A,
16153 Genova-Sestri P., Italy
t: +39 0 10 60361
f: +39 0 10 6036280
e: info@hypertac.it

Hypertac GmbH

Ulrichsberger Straße 17,
94469 Deggendorf, Germany
t: +49 (0) 991 250120
f: +49 (0) 991 2501244
e: info@hypertac.de

Hypertac S.A.

31 rue Isidore Maille,
76410 St. Aubin Lès Elbeuf, France
t: +33 (0) 2 32969176
f: +33 (0) 2 32969170
e: info@hypertac.fr



D SERIES SUPPLEMENT TO HYPERTRONICS 2010 FULL LINE CATALOG

FOR FURTHER INFORMATION VISIT www.hypertronics.com

Distributor

Copyright© 2010 Hypertronics Corporation - All rights reserved. Hypertac is a registered trademark of Smiths and/or its subsidiaries and affiliates. HYPERTRONICS and the H logo are trademarks of Hypertronics Corporation. All other names and marks are property of their respective owners. HYP-039-0110

smiths
bringing technology to life


D Series




Circular Plastic Connectors

- 3, 4, 5, 7, 9, 12 and 25 position models
- 1 to 8 Amps per contact
- Mixed signal and power or coax available
- Each connector half accepts pins or sockets
- High temp ULTEM plastic body
- Quick disconnect push button release
- Alignment and polarization provided by housing
- Crimp, solder cup, and pc contacts

Connector Dimensions

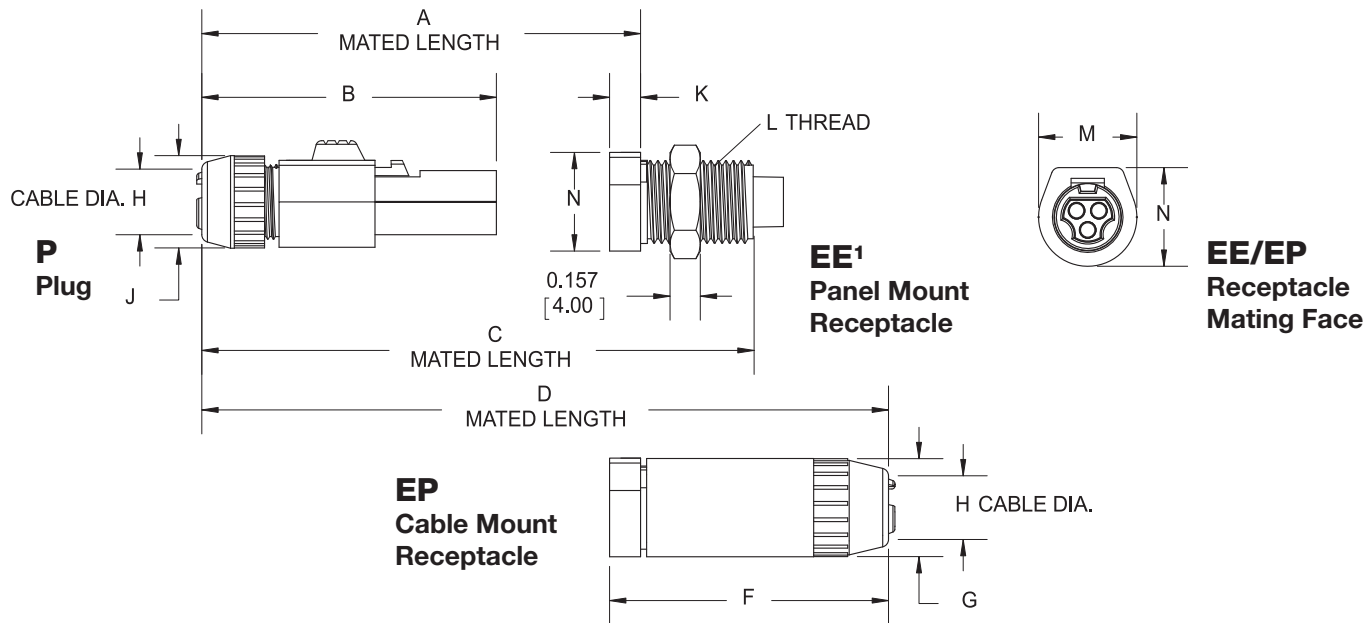

Mounting Dimensions



Hole Punches

Part Number	Series	Maximum Recommended Panel Thickness in Steel	Maximum Recommended Panel Thickness in Alum.
TBD	D00	0.048 [1.25]	0.075 [1.90]
T1903	D01	0.048 [1.25]	0.075 [1.90]
T1904	D02	0.062 [1.60]	0.094 [2.40]

NOTE:
1) Recommended tightening torque for panel mount receptacle (0.452–0.678 N•M) for both D01 and D02.


Dimensions are in inches [mm]



D Series



Panel Mount Receptacle (EE)

D01 Shown

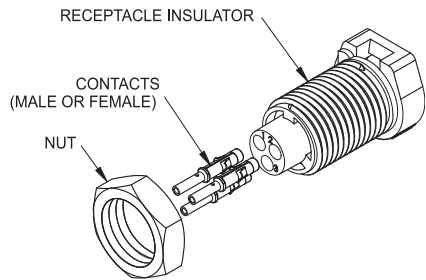

Cable Mount Receptacle (EP)

D01 Shown

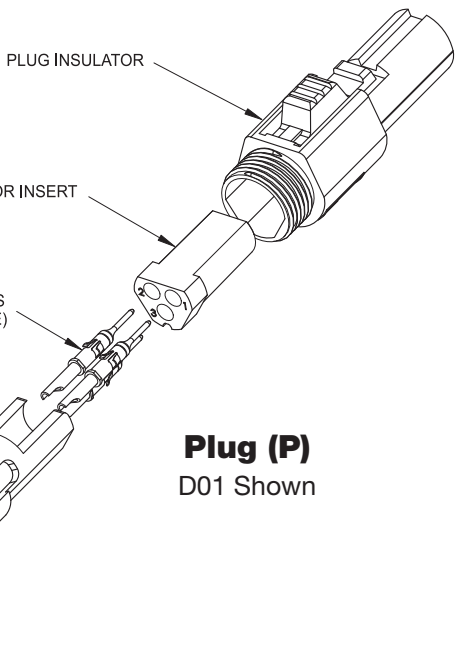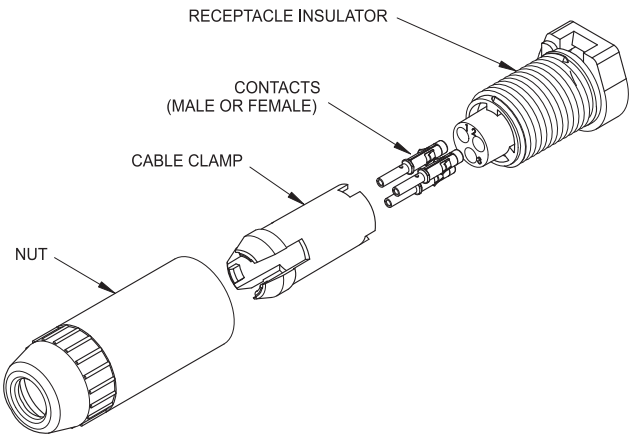

Plug (P)

D01 Shown

Dimensions are in inches [mm]

D Series



D00 General Specifications	
	5 Pin
Contact Diameter	0.012 [0.30]
Current Rating (Amps)	1
Contact Resistance (milliohms)	< 6.7
Extraction Force Per Contact (oz.)	0.35 to 1.6
Contact Life Cycles	up to 100,000
Breakdown Voltage Between Contacts	> 1000V
Dielectric Withstanding Voltage	>750V
Contact	
Socket Material	Beryllium copper wires and brass body (socket)
Pin Material	Brass; gold over nickel (pin)
Plating Material	Gold over nickel
Insulation Resistance	> 10 ³ megohms at 500 VDC
Temperature Rating	-40° C to 125° C

D01 General Specifications			
	3 Pin	4 Pin	9 Pin
Contact Diameter	0.024 [0.60]	0.024 [0.60]	0.016 [0.40]
Current Rating (Amps)	4	4	1
Contact Resistance (milliohms)	< 5	< 5	< 8
Extraction Force Per Contact (oz.)	0.50 to 2.00	0.50 to 2.00	0.60 to 1.60
Contact Life Cycles	100,000	100,000	100,000
Breakdown Voltage Between Contacts	> 2250V	> 2250V	> 1000V
Dielectric Withstanding Voltage	1650V	1650V	750V
Contact			
Socket Material	Beryllium copper wires and brass body (socket)		
Pin Material	Brass (pin)		
Plating Material	Gold over nickel		
Insulation Resistance	> 10 ³ megohms at 500 VDC		
Temperature Rating	-40° C to 125° C		

Accessories	3 Pin	4 Pin	9 Pin
Crimp Tool	AFM8 or (M22520/2-01)	AFM8 or (M22520/2-01)	AFM8 or (M22520/2-01)
Positioner	K547	K547	T1914
Removal Tool	S/DEM1.0060	S/DEM1.0060	—
Insertion Tool	T1866	T1866	T1916


Dimensions are in inches [mm]



D Series

D02 General Specifications					
	3 Pin	7 Pin	9 Pin	12 Pin	25 Pin
Contact Diameter	0.059 [1.50]	0.024 [0.60]	0.024 [0.60]	0.018 [0.50]	0.016 [0.40]
Current Rating (Amps)	8	4	4	2.5	1
Contact Resistance (milliohms)	< 2	< 5	< 5	< 8	< 8
Extraction Force Per Contact (oz.)	1.80 to 5.40	0.50 to 2.00	0.50 to 2.00	0.30 to 1.60	0.30 to 1.60
Contact Life Cycles	100,000	100,000	100,000	100,000	100,000
Breakdown Voltage Between Contacts	> 2250	> 2000	> 1560	> 1000	> 1000
Dielectric Withstanding Voltage	1650	1500	1150	750	750
Contact					
Socket Material	Beryllium copper wires and brass body (socket)				
Pin Material	Brass (pin)				
Plating Material	Gold over nickel				
Insulation Resistance	> 10 ³ megohms at 500 VDC				
Temperature Rating	-40° C to 125°				


Accessories	3 Pin	7 and 9 Pin	12 Pin	25 Pin
Crimp Tool	AF8	AFM8 or M22520/2-01	AFM8 or M22520/2-01	AFM8 or M22520/2-01
Positioner	TP688	K623	T870	T1914
Removal Tool	S/DEM5.0150	S/DEM1.0060	—	—
Insertion Tool	T1888	T1866	T1271	T1916

D00 5 Pin 	Housing Options	Example Part Numbers
	Receptacle Panel Mount Plug	
	Contact Options	
	Crimp Socket – 26-28 AWG Crimp Pin – 26-28 AWG	D00EEB503FRUTAH D00PB503MRUTH
Receptacle seen from mating side	Tools	See part number configurator on page 2/10 for complete ordering information.
	Crimp Tool Crimp Positioner Insertion Tool	
		AFM8 or M22520/2-01 T1914 T1916

Dimensions are in inches [mm]

D Series



D01 3 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D01EEB306FRUTAH D01EPB306FRUTAH D01PB306MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 22-26 AWG Crimp Socket – 18-20 AWG Solder Cup Socket – up to 22 AWG Crimp Pin – 22-26 AWG Crimp Pin – 18-20 AWG Solder Cup Pin – up to 22 AWG	
	Tools	
	Crimp Tool Crimp Positioner Removal Tool Insertion Tool	AFM8 or M22520/2-01 K547 S/DEM1.0060 T1866


D01 4 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D01EEB406FRUTAH D01EPB406FRUTAH D01PB406MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 22-26 AWG Crimp Socket – 18-20 AWG Solder Cup Socket – up to 22 AWG Crimp Pin – 22-26 AWG Crimp Pin – 18-20 AWG Solder Cup Pin – up to 22 AWG	
	Tools	
	Crimp Tool Crimp Positioner Removal Tool Insertion Tool	AFM8 or M22520/2-01 K547 S/DEM1.0060 T1866

D01 9 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D01EEB904FRUTAH D01EPB904FRUTAH D01PB904MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 26-28 AWG Solder Cup Socket – up to 26 AWG Crimp Pin – 26-28 AWG Solder Cup Pin – up to 26 AWG	
	Tools	
	Crimp Tool Crimp Positioner Insertion Tool	AFM8 or M22520/2-01 T1914 T1916


Dimensions are in inches [mm]



D Series

D02 3 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D02EEB315FRUTAH D02EPB315FRUTAH D02PB315MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 18 and 20 AWG Solder Cup Socket – up to 16 AWG Crimp Pin – 18 and 20 AWG Solder Cup Pin – up to 16 AWG	
	Tools	
	Crimp Tool Crimp Positioner Removal Tool Insertion Tool	AF8 TP688 S/DEM5.0150 T1888

D02 7 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D02EEB706FRUTAH D02EPB706FRUTAH D02PB706MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 22-26 AWG Solder Cup Socket – up to 22 AWG Crimp Pin – 22-26 AWG Solder Cup Pin – up to 22 AWG	
	Tools	
	Crimp Tool Crimp Positioner Removal Tool Insertion Tool	AFM8 or M22520/2-01 K623 S/DEM1.0060 T1866


D02 9 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D02EEB906FRUTAH D02EPB906FRUTAH D02PB906MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 22-26 AWG Solder Cup Socket – up to 22 AWG Crimp Pin – 22-26 AWG Solder Cup Pin – up to 22 AWG	
	Tools	
	Crimp Tool Crimp Positioner Removal Tool Insertion Tool	AFM8 or M22520/2-01 K623 S/DEM1.0060 T1866

Dimensions are in inches [mm]

D Series



D02 12 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D02EEB125FRUTAH D02EPB125FRUTAH D02PB125MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 22-26 AWG Solder Cup Socket – up to 22 AWG Crimp Pin – 22-26 AWG Solder Cup Pin – up to 22 AWG	
	Tools	
	Crimp Tool Crimp Positioner Insertion Tool	AFM8 or M22520/2-01* T870 T1271

D02 25 Pin  Receptacle seen from mating side	Housing Options	Example Part Numbers
	Receptacle Panel Mount Receptacle Cable Plug	D02EEB2504FRUTAH D02EPB2504FRUTAH D02PB2504MRUT
	Contact Options	See part number configurator on page 2/10 for complete ordering information.
	Crimp Socket – 26-28 AWG Solder Cup Socket – up to 26 AWG Crimp Pin – 26-28 AWG Solder Cup Pin – up to 26 AWG	
	Tools	
	Crimp Tool Crimp Positioner Insertion Tool	AFM8 or M22520/2-01 T1914 T1916


Dimensions are in inches [mm]



D Series


Combination Connectors Power and Signal

• Two 8 Amp and seven 2.5 Amp Signal Contacts • Crimp Contacts

D02 Power and Signal  Receptacle seen from mating side	Housing Options	Example Part Numbers*	
	Receptacle Panel Mount Plug	D02EEB215/705FRUTAH D02PB215/705MRUT	
	Contact Options	See part number configurator on page 2/10 for complete ordering information.	
	Power Socket – 16-20 AWG Power Pin – 16-20 AWG Signal Socket – 22-26 AWG Signal Pin – 22-26 AWG		
	Tools		
	Crimp Tool Crimp Positioner (Pin) Crimp Positioner (Socket) Removal Tool Insertion Tool	Power AF8 T1164 TP688 T1124 —	Signal AFM8 T870 T870 — T1215

General Specifications

Contacts	Power	Signal
Number of Contacts	2	7
Diameter	0.059 [1.50]	0.018 [0.50]
Current Rating (Amps)	8	2.50
Contact Resistance	< 2.0 milliohms	< 8.0 milliohms
Extraction Force	1.8 to 5.4 oz.	0.3 to 1.6 oz.
Contact Material	Brass Beryllium copper wires and brass body	
Pins Sockets		
Insulator Material	Polycarbonate Polycarbonate	
Receptacle Plug		
Flammability	UL94V0	
Temperature Rating	-40° C to 85° C	
Insulation Resistance	> 10 Mohm at 500 VDC	

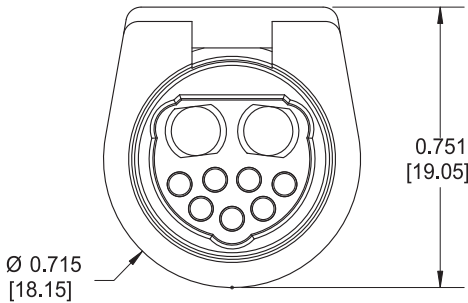

NOTE:
*B = Black Polycarbonate Available in Power and Signal.

Dimensions are in inches [mm]


D Series



Combination Connectors Coax or Power and Signal

D02

Coax or Power and Signal



Receptacle seen from mating side

Housing Options		Example Part Numbers ¹	
Receptacle Panel Mount Receptacle Cable Plug		D02EEB905FR1C1FRUTHA D02EPB905FR1C1FRUTHA D02PB905MR1C1MRUT	
Contact Options		See part number configurator on page 2/10 for complete ordering information.	
Coax Crimp Socket – RRG 316, RG316DB Coax Solder Cup Socket – RG405, T-Flex 405 Coax Crimp Pin – RG316, RG316DB Coax Solder Cup Pin – RG405, T-Flex 405 Power Crimp Socket – 12 AWG Power Crimp Pin – 12 AWG Signal Crimp Socket – 22-26 AWG Signal Solder Cup Socket – 22-26 AWG Signal Crimp Pin – 22-26 AWG Signal Solder Cup Pin – 22-26 AWG			
Tools			
Crimp Tool	Coax HX3 (Outer) AFM8 (Inner)	Power M309	Signal AFM8
Crimp Die Set	T1958 (Outer) or T2019 (Outer for RG316DB)	–	–
Crimp Positioner	T1957 (Inner)	T1981	T870
Removal Tool	T1982	T1982	–
Insertion Tool	–	–	T1215

NOTES:
1) H = Black Polyetherimide (High Temperature).
2) Available in Coax or Power and Signal.

Dimensions are in inches [mm]



D Series

Ordering Information

Connector Housing

D00, D01, D02

Insulator

P = Plug
EE = Receptacle panel mount
EP = Receptacle cable mount
(EP Not available for 215/705 or 503 style)

Main Body Color

B = Black

Contact Arrangement

D00 5 Pin = 503
D01 3 Pin = 306
D01 4 Pin = 406
D01 9 Pin = 904
D02 3 Pin = 315
D02 7 Pin = 706
D02 9 Pin = 906
D02 12 Pin = 125
D02 25 Pin = 2504
D02 Power/Signal = 215/705

D01P B 306 F R U TABH

Plating

See Plating Reference

Material

U = Ultem 1010R

Terminal Styles

R = Crimp (shipped unassembled) D00 available with "R" termination only (for crimp or solder)
RR = Crimp for 18-20 AWG (D01/306 and D01/406 only, (shipped unassembled)
S = Solder cup (shipped unassembled)

Contact Gender

M = Male
F = Female

D00 panel mount receptacle with 6" pigtail leads pretermination = D00EEB-001
** Mounting options are available, see <http://www.hypertronics.com/en/Products/circular-connectors/D-Series.aspx> or call (978) 568-0451 for more information.

D02 Coax or Power and Signal Ordering Information

Connector Housing

D02

Insulator

P = Plug
EE = Receptacle panel mount
EP = Receptacle cable mount

Color

B = Black

Contact Arrangement

905

Signal Contact Gender

M = Male
F = Female

Terminal Styles

R = Crimp
S = Solder

D02P B 905 M R 1C1 M R U TH

Plating

See Plating Reference

Material

U = Ultem 1010R

Terminal Styles

R = Crimp
S = Solder

Coax Contact Gender

M = Male
F = Female

Coaxial/Power Cable Type

1C1 = RG316 (crimp)
1C2 = T-Flex 405, RG 405 (solder only, cannot be used with crimp)
1C3 = RG316DB
1P1 = 12 AWG

Plating Reference	
Male Pins:	T = 10µin gold (min) over nickel (NA 0n D00) TH = 50µin gold (min) over nickel
Female Sockets:	TAH = 50µin gold (min) over nickel on mating surface, gold flash over nickel on termination TABH = 50µin gold (min) over nickel on mating surface, tin lead over nickel on termination (D & B only)

Dimensions are in inches [mm]