

### Power Supplies Affected

SLS-05-090-1T, SLS-12-051T, SLS-15-045T, SLS-24-036T

### What's Included

- Part C Cover
- Six Self-tapping Screws M3x6 mm
- Instruction Manual

### Assembly Instructions for Cover Installation

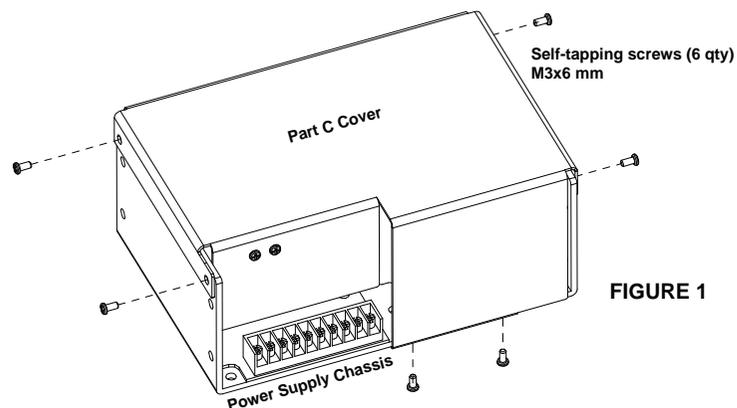


FIGURE 1

1. Position the Part C Cover so that it overlaps the exterior surface of the Power Supply Chassis.
2. Line up the Part C Cover mounting holes with the Power Supply Chassis mounting holes. Be careful not to pinch the wires.
3. Secure with the provided screws as shown in Figure 1.

### Assembly Instructions for OVP

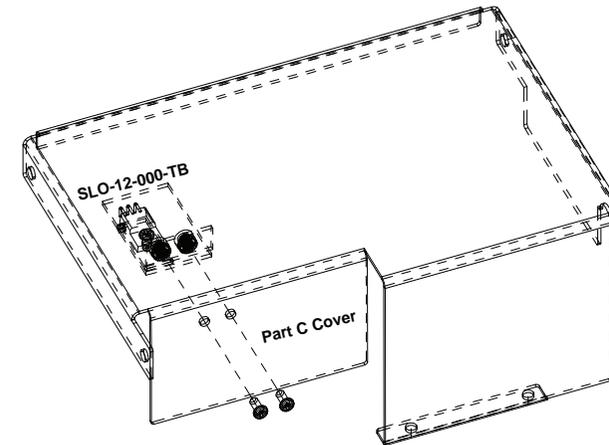


FIGURE 2

1. Locate the mounting holes as shown in Figure 2.
2. Attach SLO-12-000-TB tightly against the inner side of the cover.
3. Position the mounting holes and tighten the screws with 8 kg torque.
4. Assemble the two wires coming out of the SLO-12-000-TB. On the terminal block, the white wire goes to the "+" and the black wire goes to the "-".

### Notes

1. Be careful while assembling the cover, so that no parts on the PCB are damaged.
2. When tightening the screws, make sure the torque is 8 kg.
3. Derate power supply by 15% with cover installed.

### Technical Support

U.S.: (800) 377-4384  
 International: (847) 268-6651  
 E-mail: tech@solahd.com