

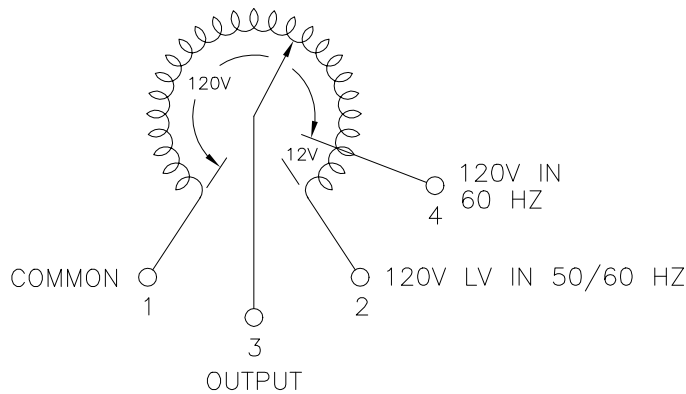


DWG. NO.	031-0201		
SYMBOL	E.C.N.	DATE	APVD.
D	21877	6/12/92	
E	22518	3/3/94	
	DIM. 2.93 WAS 2.80		

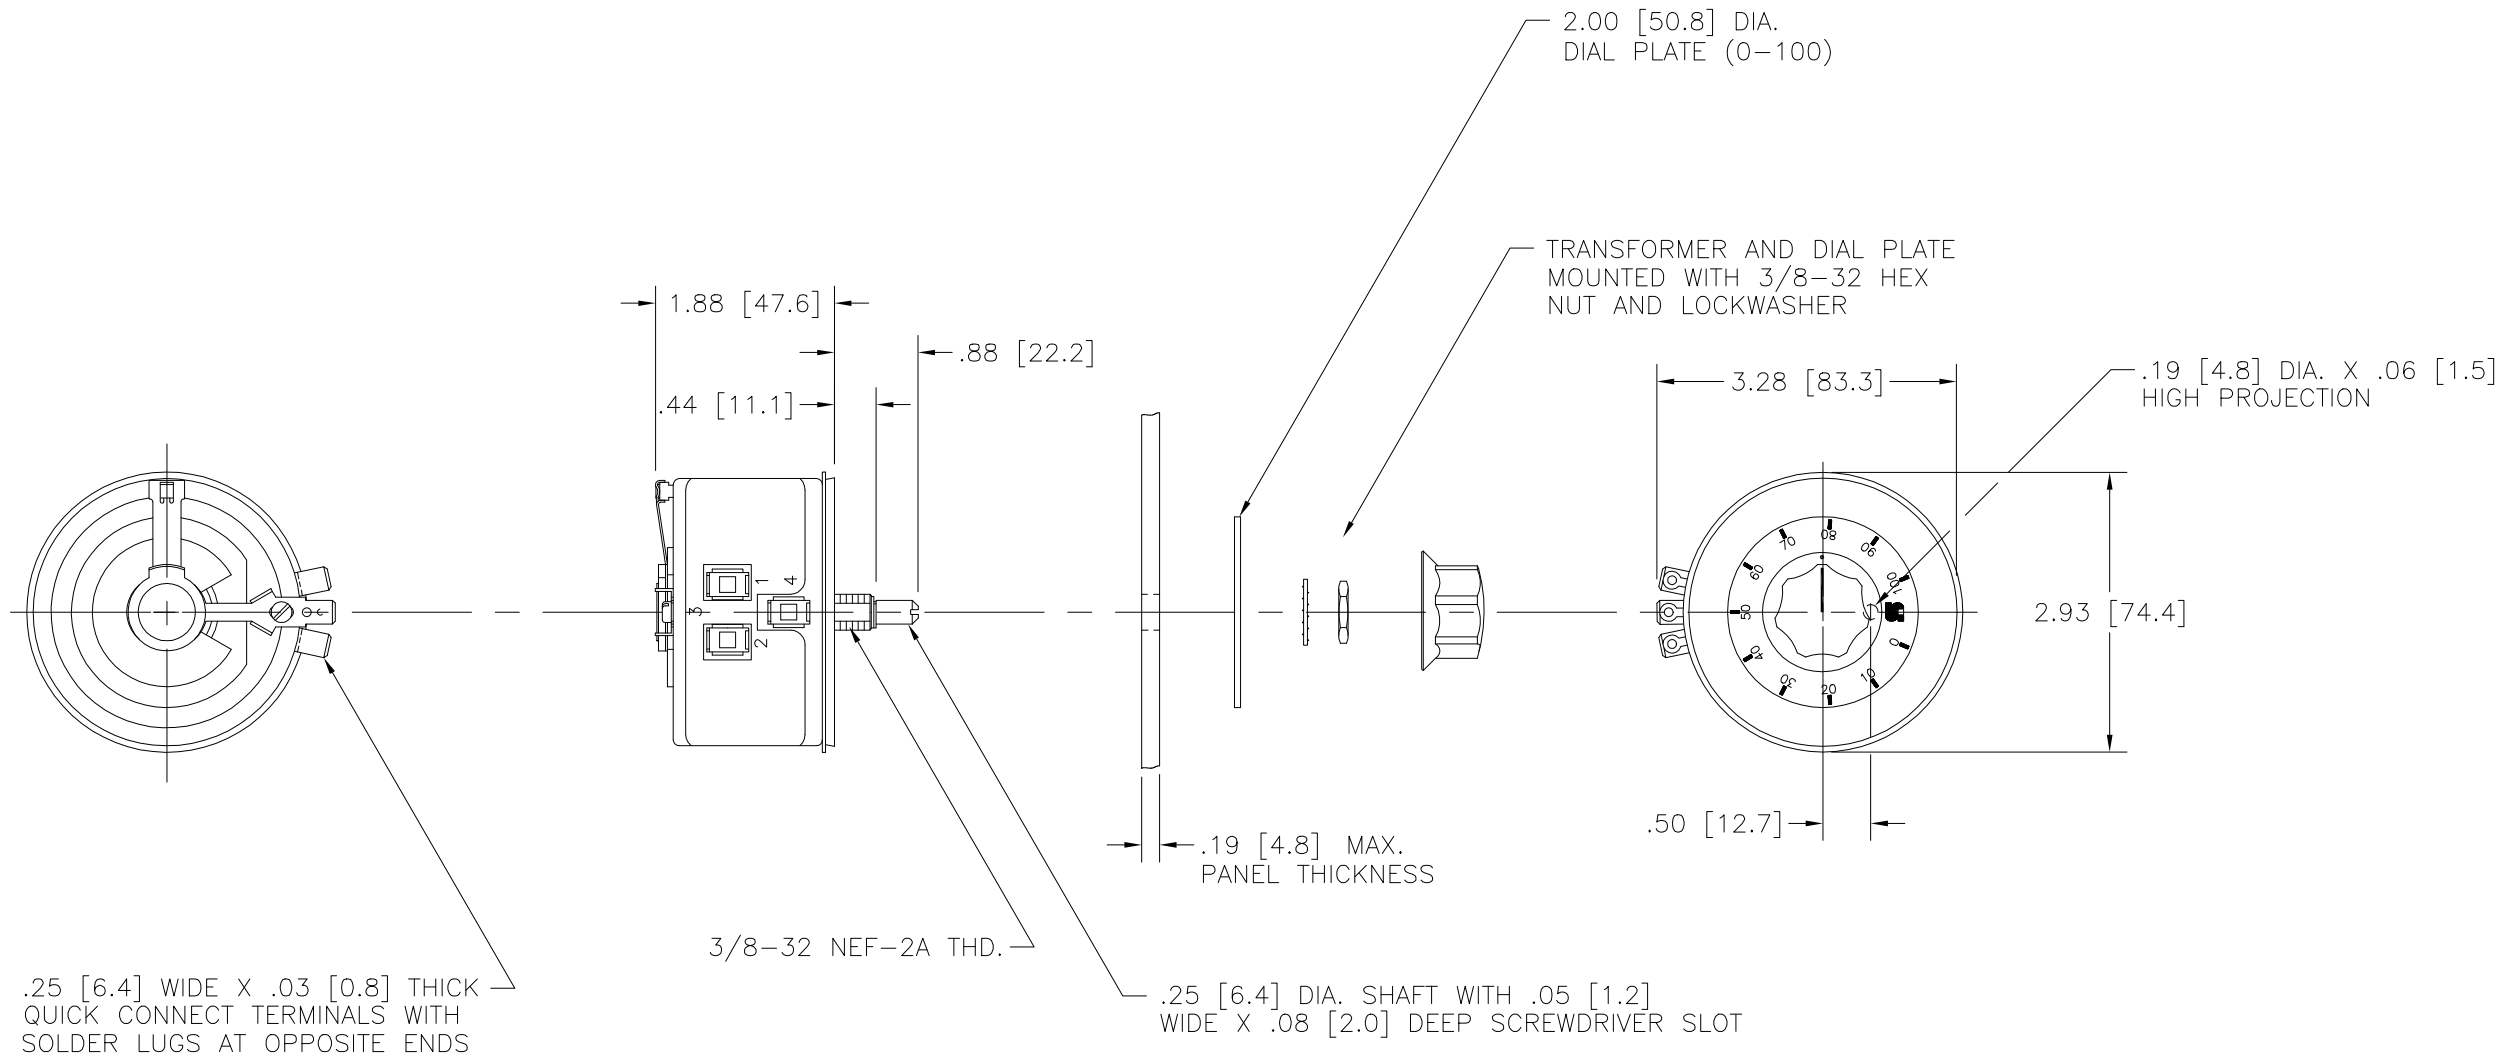

SCHMATIC
VIEWED FROM BASE END

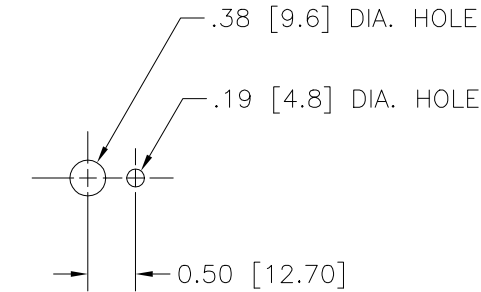

PANEL MTG. DETAIL

SPECIFICATIONS																
WIRING	INPUT		OUTPUT						SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS						
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END								
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	INPUT		JUMPER	OUTPUT					
SINGLE PHASE	120	50/60	0-120	2.0	0.24	2.5	0.30	CW	1-2	——	1-3					
		60	0-132	2.0	0.26	——	——	CCW	1-2	——	2-3					
								CW	1-4	——	1-3					
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX ±.005 HOLES .002 ANGLES 1° DRAFT 1-1/2°				TITL: SPEC. CONTROL DWG. VARIABLE TRANSFORMER TYPE: 201												
MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING																
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DRAWN BY K. TOLLIVER		DATE 1/27/92		FIRST USED ON 031-0201		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE		
				CHECKER		DATE		WEIGHT APPROX. 2 LBS.		CODE IDENT. NO. 83008		DWG. SIZE	DWG. NO.			
				ENGINEER		DATE		SCALE 1 = 1		SHEET 1 OF 1		D	031-0201			

