
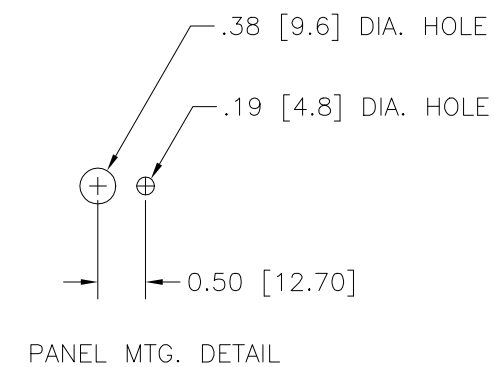
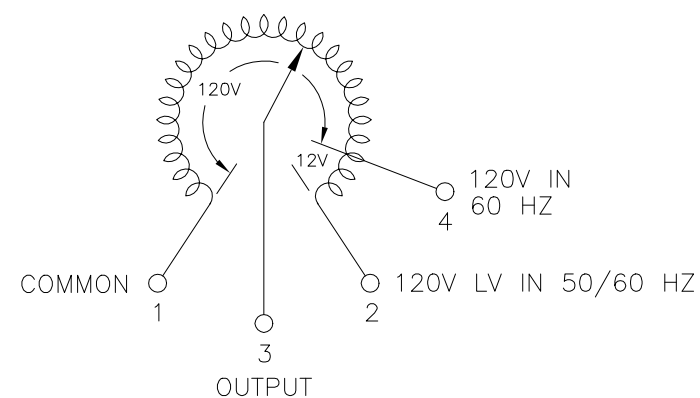


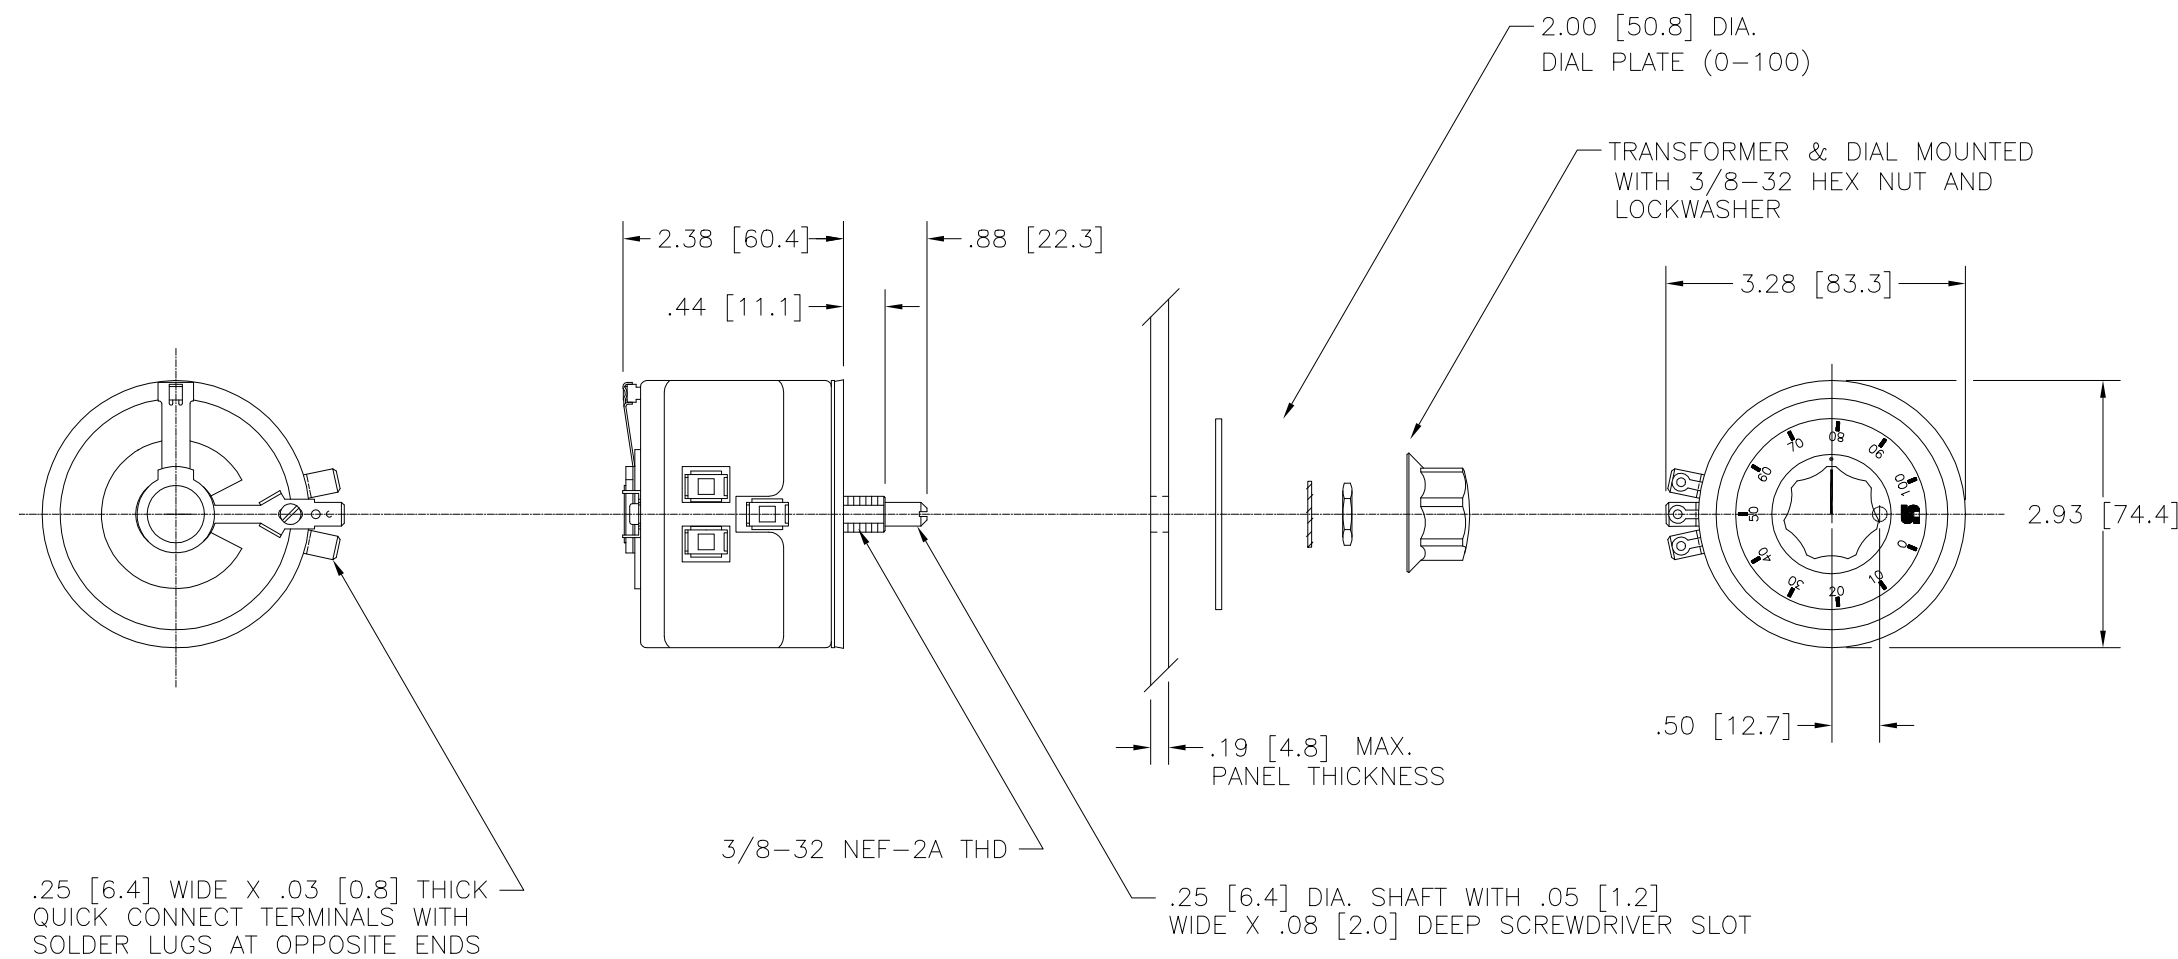

SPECIFICATIONS														
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS						
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END						
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT			
SINGLE PHASE	120	50/60	0-120	3.0	0.36	3.5	0.42	CW	1-2	—	1-3			
		60	0-132	3.0	0.40	—	—	CCW	1-2	—	2-3			
								CW	1-4	—	1-3			
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT — .005 — .010 .06 1° 1-1/2° — .0000 — .005			UNITS IN (mm)		TITLE: SPECIFICATION CONTROL DWG. VARIABLE TRANSFORMER TYPE: 291				 STACO ENERGY PRODUCTS CO. DAYTON, OHIO U.S.A.					
MATERIAL: _____		ALL DIMENSIONS APPLY AFTER PLATING												
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DRAWN BY K. TOLLIVER		DATE 8/23/91		FIRST USED ON 031-0291		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE
				CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO. 83008		DWG. SIZE D	DWG. NO. 031-0291	
				ENGINEER		DATE		SCALE FULL		SHEET 1 of 1				