

RoHS Compliant Pb - Lead Free	Ltr	Revisions	Date	Appr

Electrical Specifications:

Frequency Range		0.500 to 156.000					MHz
Temperature Stability		±100					PPM Max
		±50					
		±30					
		±25					
Aging per Year		±3					
Operating Temperature Range	Standard	-10 to +70					°C
	Extended	-40 to +85					
Storage Temperature Range		-55 to +125					
Supply Voltage		1.8 ± 5%	2.5 ± 5%	2.85 ± 5%	3.3 ± 10%	5.0 ± 10%	Vdd
Input Current	1.000 to 32.000 MHz	7	8	15	7	25	mA Max
	32.100 to 50.000 MHz	15	20	20	12	30	
	50.100 to 70.000 MHz	15	12	25	25	40	
	70.100 to 80.000 MHz	15	20	30	25	50	
	80.100 to 125.000 MHz	20	25	35	30	60	
	125.100 to 156.000 MHz	25	30	40	40	80	
Output Voltage	Logic High (Voh)	90% (80% at 1.8)					Vdd Min
	Logic Low (Vol)	10% (20% at 1.8)					Vdd Max
Output Symmetry	Standard	40 to 60					%
	Tight	45 to 55					
Output Load		15					pF Max HCMOS
		30					
		50					
Rise and Fall Time	1.000 to 32.000 MHz	5	5	6	10	10	ns Max
	32.100 to 50.000 MHz	5	5	6	10	5	
	50.100 to 70.000 MHz	4	4	4	6	5	
	70.100 to 80.000 MHz	4	4	4	5	5	
	80.100 to 125.000 MHz	3	3	4	5	4	
	125.100 to 155.520 MHz	3	3	3	4	4	
Phase Jitter (12 KHz to 20 MHz)		1					ps Max RMS
Enable-Disable Function		Tri-State					-
Output Disable Time		300	150				ns Max
Output Enable Time		10	10				ms Max
Start Up Time		10					ms Max

Temperature stability is Inclusive of all conditions:

Calibration Tolerance at +25°C, frequency stability over the operating temperature range, supply voltage, supply voltage change, output load changes, shock, vibration, and 1st year aging at +25°C.



11-3 Chien-Kuo Rd T.E.P.Z. 4027 Taiwan, ROC

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: MK

Page: 1/4 Date: Oct 13, 2017

Specification Title:

Clock Oscillator




Low Profile

5.0 x 7.0 millimeter Surface Mount

General Product Specification


Part Number: **S7 Series**

Mechanical Outline:

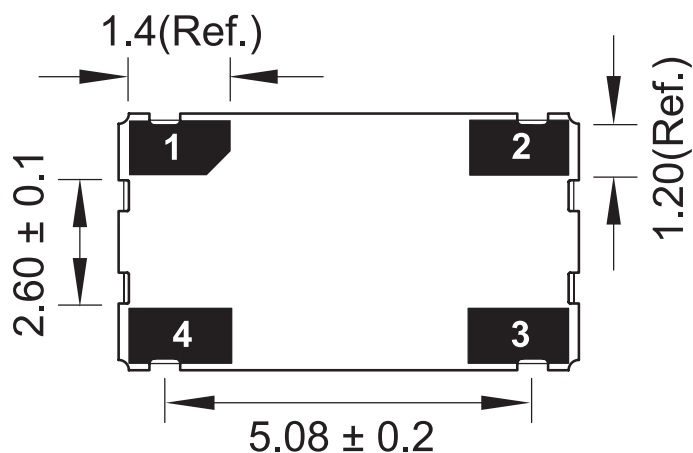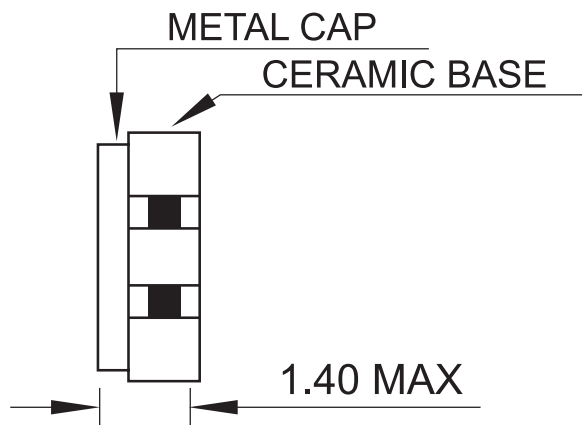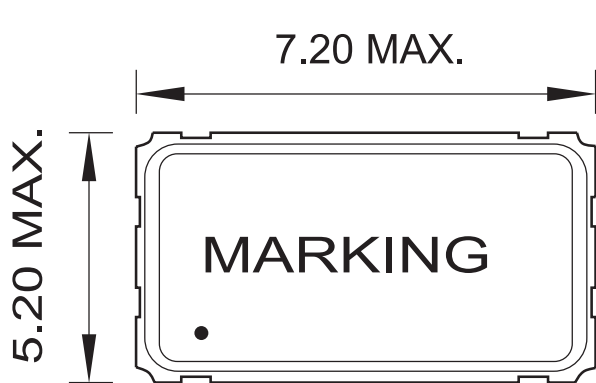

#1 : E/D #2 : GND
#4 : VDC #3 : OUTPUT

Bottom

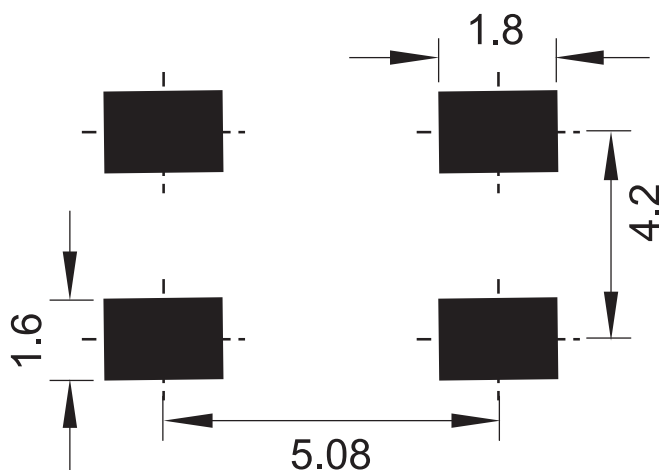


Recommended Land Pattern

Pin1	Pin 3
INH	Output
High or Open	Operating
Low	High Impedance


Package is Seam Sealed Ceramic-Metal.
Dimensions are millimeters.

Carrier Tape Dimensions:

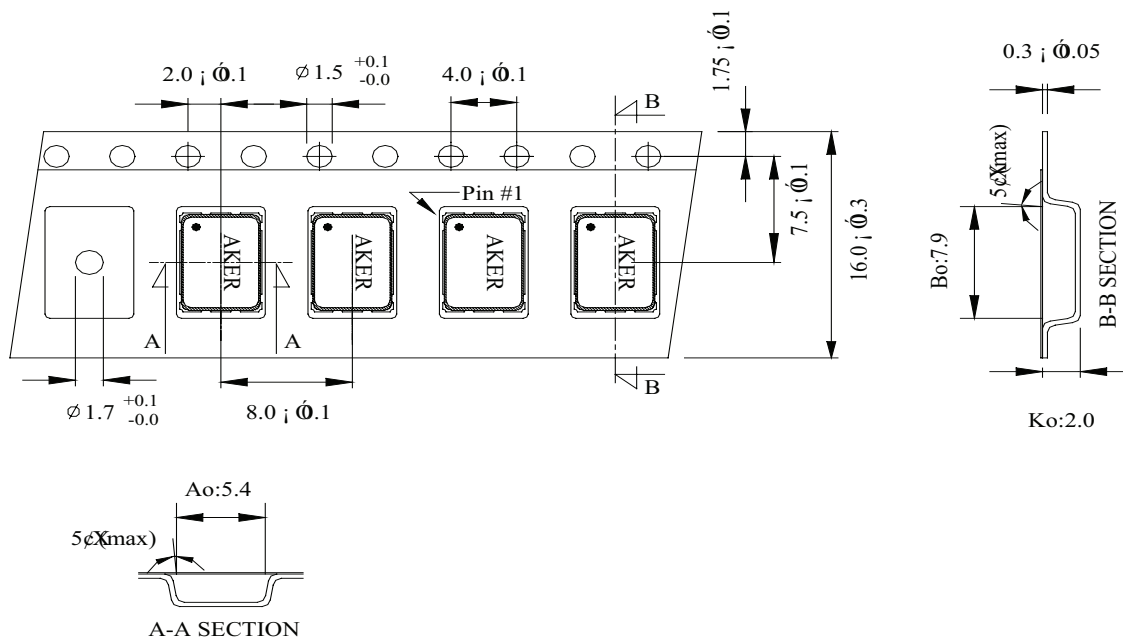

Dimensions are millimeters.

Solder Reflow Characteristics:

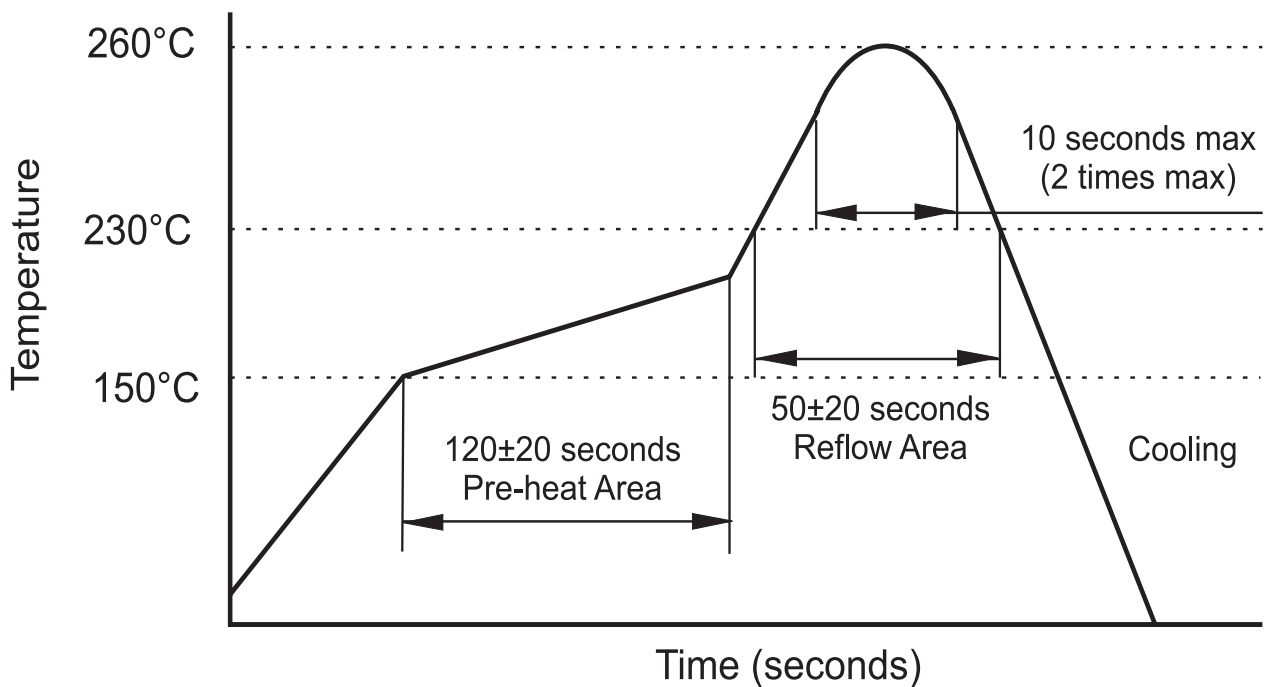

How to build a Part Number:

Series	S	Parameter
Package	7	5.0 x 7.0 mm
Supply Voltage	50	+5.0 Vdd ± 10%
	33	+3.3 Vdd ± 10%
	28	+2.8 Vdd ± 5%
	25	+2.5 Vdd ± 5%
	18	+1.8 Vdd ± 5%
Temperature Stability	10	±100 PPM
	05	±50 PPM
	03	±30 PPM
	025	±25 PPM
Duty Cycle	See Notes	40 / 60 %
	T	45 / 55 %
		-
Frequency	0.500 to 156.000	MHz
		-
Temperature Range	See Notes	-10 to +70 °C
	X	-40 to +85 °C
		-
Output Load	15	pF Max HCMOS
	30	
	50	
		-
Packaging	M	250pcs Reel
	R	1000pcs Reel

Part Number Example:

S73305T-50.000-X-15-R

S7: 5.0 x 7.0 mm SMD Package

33: +3.3 Vdd Supply Voltage

05: ±50 PPM Temperature Stability

T: 45/55% Tight Symmetry

50.000 MHz Nominal Frequency

X: -40 to + 85° C Extended Temperature Range

15: 15 pF Max HCMOS Output Load

R: Tape and Reel Packaging

Notes:

1- Standard Duty Cycle and Temperature Range do not need to be included in Part Number description.

2- Quantities less than 250pcs are shipped in tape only.

3- Specification subject to change without notice.