



NOMINAL SIZE = 1.37 in x 0.62 in
(34,8 mm x 15,75 mm)

Features

- V_{TT} Bus Termination Output (Output Tracks the System V_{REF})
- 15 A Output Current (12 A for 12-V Input)
- 3.3-V, 5-V or 12-V Input Voltage
- DDR & QDR Compatible
- On/Off Inhibit (for V_{TT} Standby)
- Under-Voltage Lockout
- Operating Temp: -40 to $+85$ °C
- Efficiencies up to 91 %
- 62 W/in³ Power Density
- Output Over-Current Protection (Non-Latching, Auto-Reset)
- Safety Agency Approvals (Pending): UL/cUL60950, EN60950, VDE
- Point-of-Load Alliance (POLA) Compatible

Description

The PTHxx010Y are a series of ready-to-use switching regulator modules from Texas Instruments designed specifically for bus termination in DDR and QDR memory applications. Operating from either a 3.3-V, 5-V or 12-V input, the modules generate a V_{TT} output that will source or sink up to 15 A of current (12 A for 12-V input) to accurately track their V_{REF} input. V_{TT} is the required bus termination supply voltage, and V_{REF} is the reference voltage for the memory and chipset bus receiver comparators. V_{REF} is usually set to half the V_{DDQ} power supply voltage.

The PTHxx010Y series employs an actively switched synchronous rectifier

output to provide state-of-the-art step-down switching conversion. The products are small in size (1.37 in × 0.62 in), and are an ideal choice where space, performance, and high efficiency are desired, along with the convenience of a ready-to-use module.

Operating features include an on/off inhibit and output over-current protection (source mode only). The on/off inhibit feature allows the V_{TT} bus to be turned off to save power in a standby mode of operation. To ensure tight load regulation, an output remote sense is also provided.


Package options include both through-hole and surface mount configurations.

Pin Configuration

Pin	Function
1	GND
2	V_{in}
3	Inhibit*
4	No Connect
5	V_o Sense
6	V_{TT}
7	GND
8	V_{REF}
9	No Connect
10	No Connect

* Denotes negative logic:
Open = Normal operation
Ground = V_{TT} output on

Standard Application

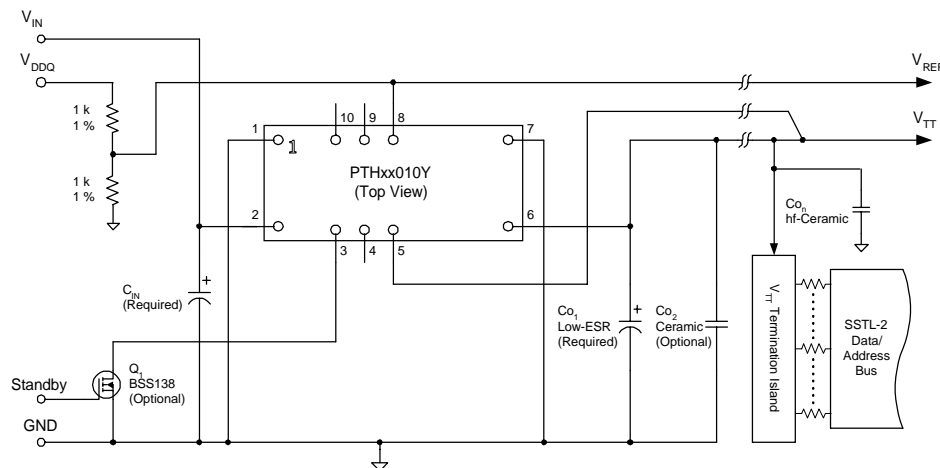

C_{in} = Required capacitor; 470 μ F (3.3-/5-V input), 560 μ F (12-V input)
 C_{o1} = Required low-ESR electrolytic capacitor; 470 μ F (3.3-/5-V input), 940 μ F (12-V input).
 C_{o2} = Ceramic capacitance for optimum response to a 3-A (\pm 1.5-A) load transient. 200 μ F (3.3-/5-V input), 400 μ F (12-V input).
 C_{on} = Distributed hf-ceramic decoupling capacitors for V_{TT} bus; as recommended for DDR memory applications.

Ordering Information

Input Voltage (PTH□□010Yxx)		Package Options (PTHxx010Y□□) ⁽¹⁾		
Code	Input Voltage	Code	Description	Pkg Ref. ⁽²⁾
03	3.3 V	AH	Horiz. T/H	(EUH)
05	5 V	AS	SMD, Standard ⁽³⁾	(EUJ)
12	12 V			

- Notes:** (1) Add “T” to end of part number for tape and reel on SMD packages only.
 (2) Reference the applicable package reference drawing for the dimensions and PC board layout
 (3) “Standard” option specifies 63/37, Sn/Pb pin solder material.

Pin Descriptions

V_{IN}: The positive input voltage power node to the module, which is referenced to common *GND*.

GND: This is the common ground connection for the *V_{IN}* and *V_{TT}* power connections. It is also the 0-VDC reference for the control inputs.

V_{REF}: The module senses the voltage at this input to regulate the output voltage, *V_{TT}*. The voltage at *V_{REF}* is also the reference voltage for the system bus receiver comparators. It is normally set to precisely half the bus driver supply voltage (*V_{DDQ}* ÷ 2), using a resistor divider (see standard application). The Thevenin impedance of the network driving the *V_{REF}* pin should not exceed 500 Ω.

V_{TT}: This is the regulated power output from the module with respect to the *GND* node, and is the tracking termination supply for the application data and address buses.

It is precisely regulated to the voltage applied to the module’s *V_{REF}* input, and is active active about 20 ms after a valid input source is applied to the module. Once active it will track the voltage applied at *V_{REF}*.

Vo Sense: The sense input allows the regulation circuit to compensate for voltage drop between the module and the load. For optimal voltage accuracy *Vo Sense* should be connected to *V_{TT}*.

Inhibit: The Inhibit pin is an open-collector/drain negative logic input that is referenced to *GND*. Applying a low-level ground signal to this input turns off the output voltage, *V_{TT}*. When the Inhibit is active, the input current drawn by the regulator is significantly reduced. If the Inhibit pin is left open circuit, the module will produce an output whenever a valid input source is applied.

Environmental & Absolute Maximum Ratings (Voltages are with respect to *GND*)

Characteristics	Symbols	Conditions	Min	Typ	Max	Units
Control Input Voltage	<i>V_{REF}</i>		-0.3	—	<i>V_{in}</i> + 0.3	V
Operating Temperature Range	<i>T_a</i>	Over <i>V_{in}</i> Range	-40 ⁽ⁱ⁾	—	85	°C
Solder Reflow Temperature	<i>T_{reflow}</i>	Surface temperature of module body or pins			235 ⁽ⁱⁱ⁾	°C
Storage Temperature	<i>T_s</i>	—	-40	—	125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, ½ Sine, mounted	—	500	—	G’s
Mechanical Vibration		Mil-STD-883D, Method 2007.2 20-2000 Hz	—	20	—	G’s
Weight	—		—	3.7	—	grams
Flammability	—	Meets UL 94V-O				




- Notes:** (i) For operation below 0 °C the external capacitors must have stable characteristics. use either a low ESR tantalum, Os-Con, or ceramic capacitor.
 (ii) During reflow of SMD package version do not elevate peak temperature of the module, pins or internal components above the stated maximum.

Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$; nominal V_{in} ; $V_{REF} = 1.25\text{ V}$; C_{in} , Co_1 , & Co_2 = typical values; and $I_o = I_{o,max}$)



Characteristics	Symbols	Conditions	PTHxx010Y			Units
			Min	Typ	Max	
Output Current	I_o	Over ΔV_{REF} range, PTH03010Y/PTH05010Y/PTH12010Y	0 0	—	± 15 ⁽¹⁾ ± 12 ⁽¹⁾	A
Input Voltage Range	V_{in}	Over I_o range	2.95 4.5 10.8	—	3.65 5.5 13.2	V
Tracking Range for V_{REF}	ΔV_{REF}		0.55	—	1.8	V
Tracking Tolerance to V_{REF}	$ V_{TT} - V_{REF} $	Over line, load and temperature	-10	—	+10	mV
Efficiency	η	$I_o = 10\text{ A}$	PTH03010Y PTH05010Y PTH12010Y	— 88 85	— — —	%
V_o Ripple (pk-pk)	V_r	20 MHz bandwidth	—	20	—	mVpp
Over-Current Threshold	I_o trip	Reset, followed by auto-recovery	PTH03010Y/PTH05010Y/PTH12010Y	— 27.5 20	— — —	A
Load Transient Response	t_{tr} ΔV_{tr}	15 A/ μs load step, from -1.5 A to +1.5 A (See note 4) Recovery Time V_o over/undershoot	—	30 30	— 40	μSec mV
Under-Voltage Lockout	UVLO	V_{in} increasing V_{in} decreasing	PTH03010Y PTH05010Y PTH12010Y PTH03010Y PTH05010Y PTH12010Y	— — — 2.2 3.4 8.8	2.45 4.3 9.5 2.40 3.7 9	2.8 4.45 10.4 — — —
Inhibit Control (pin3) Input High Voltage Input Low Voltage	V_{IH} V_{IL}	Referenced to GND	$V_{in} - 0.5$ -0.2	—	Open ⁽²⁾ 0.6	V
Input Low Current	I_{IL} inhibit	Pin to GND	—	-130	—	μA
Input Standby Current	I_{in} inh	Inhibit (pin 3) to GND	—	10	—	mA
Switching Frequency	f_s	Over V_{in} & I_o ranges	PTH03010Y/PTH05010Y/PTH12010Y	300 200	350 250 400 300	kHz
External Input Capacitance	C_{in}		PTH03010Y/PTH05010Y/PTH12010Y	470 ⁽³⁾ 560 ⁽³⁾	— —	μF
External Output Capacitance	Co_1, Co_2	Capacitance value: non-ceramic ceramic Equiv. series resistance (non-ceramic)	PTH03010Y/PTH05010Y/PTH12010Y PTH03010Y/PTH05010Y/PTH12010Y	0 — 0 0 4 ⁽⁶⁾	470 ⁽⁴⁾ 940 ⁽⁴⁾ 200 ⁽⁴⁾ 400 ⁽⁴⁾ —	8,200 ⁽⁵⁾ 6,600 ⁽⁵⁾ 300 600 m Ω
Reliability	MTBF	Per Bellcore TR-332 50 % stress, $T_a = 40^\circ\text{C}$, ground benign		6	—	10^6 Hrs

- Notes:** (1) Rating is conditional on the module being soldered to a 4-layer PCB with 1 oz. copper. See the SOA curves or contact the factory for appropriate derating.
 (2) This control pin has an internal pull-up to the input voltage V_{in} . If it is left open-circuit the module will operate when input power is applied. A small low-leakage (<100 nA) MOSFET is recommended for control. For further information, consult the related application note.
 (3) An input capacitor is required for proper operation. The capacitor must be rated for a minimum of 800 mA rms of ripple current.
 (4) The typical value of external output capacitance value ensures that V_{TT} meets the specified transient performance requirements for the memory bus terminations. Lower values of capacitance may be possible when the measured peak change in output current is consistently less than 3 A.
 (5) This is the calculated maximum. The minimum ESR limitation will often result in a lower value. Consult the application notes for further guidance.
 (6) This is the typical ESR for all the electrolytic (non-ceramic) output capacitance. Use 7 m Ω as the minimum when using max-ESR values to calculate.

Characteristic Data; $V_{REF} = 1.25\text{ V}$ (See Note A)

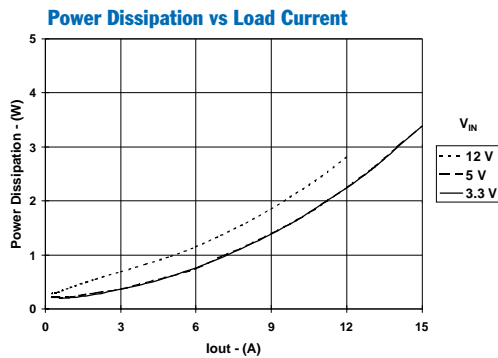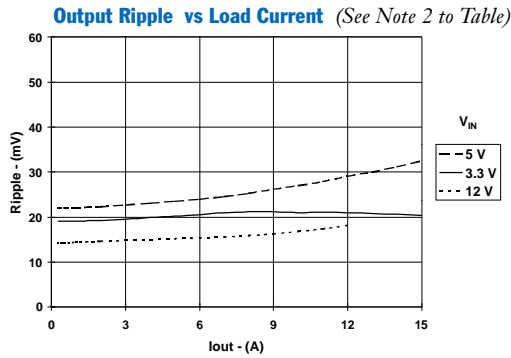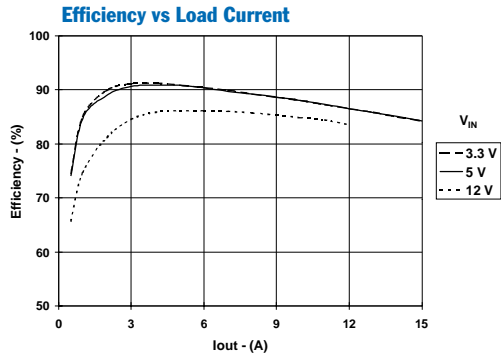


Safe Operating Area; $V_{REF} = 1.25\text{ V}$ (See Note B)

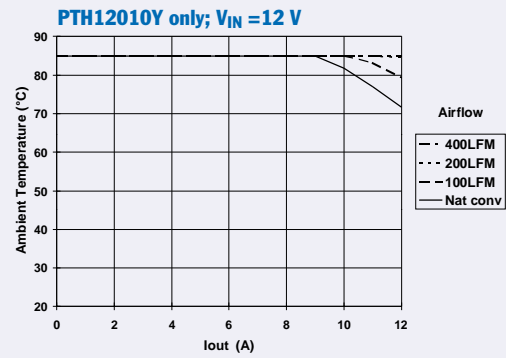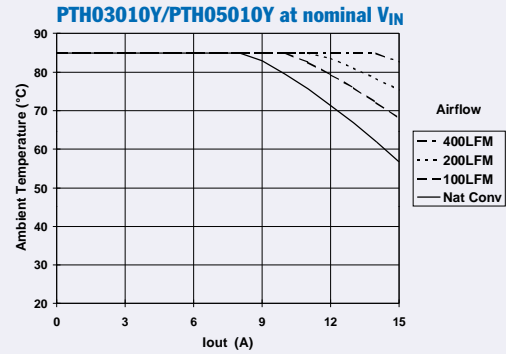


Transient Performance for $\Delta 3\text{-A}$ Load Change

PTH03010Y: Source-Sink-Source Transient

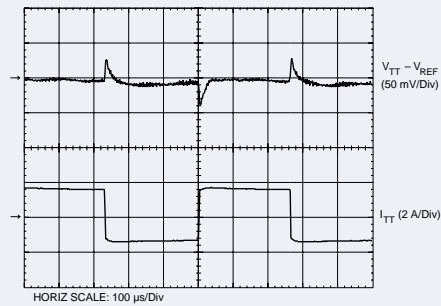

PTH12010Y: Source-Sink-Source Transient

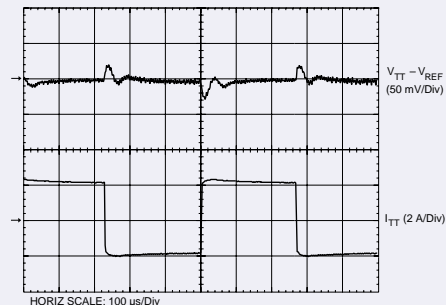


Note A: Characteristic data has been developed from actual products tested at 25°C. This data is considered typical data for the Converter.

Note B: SOA graphs represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 4 in × 4 in, double-sided PCB with 1 oz. copper.

EUH (R-PDSS-T10)

DOUBLE SIDED MODULE

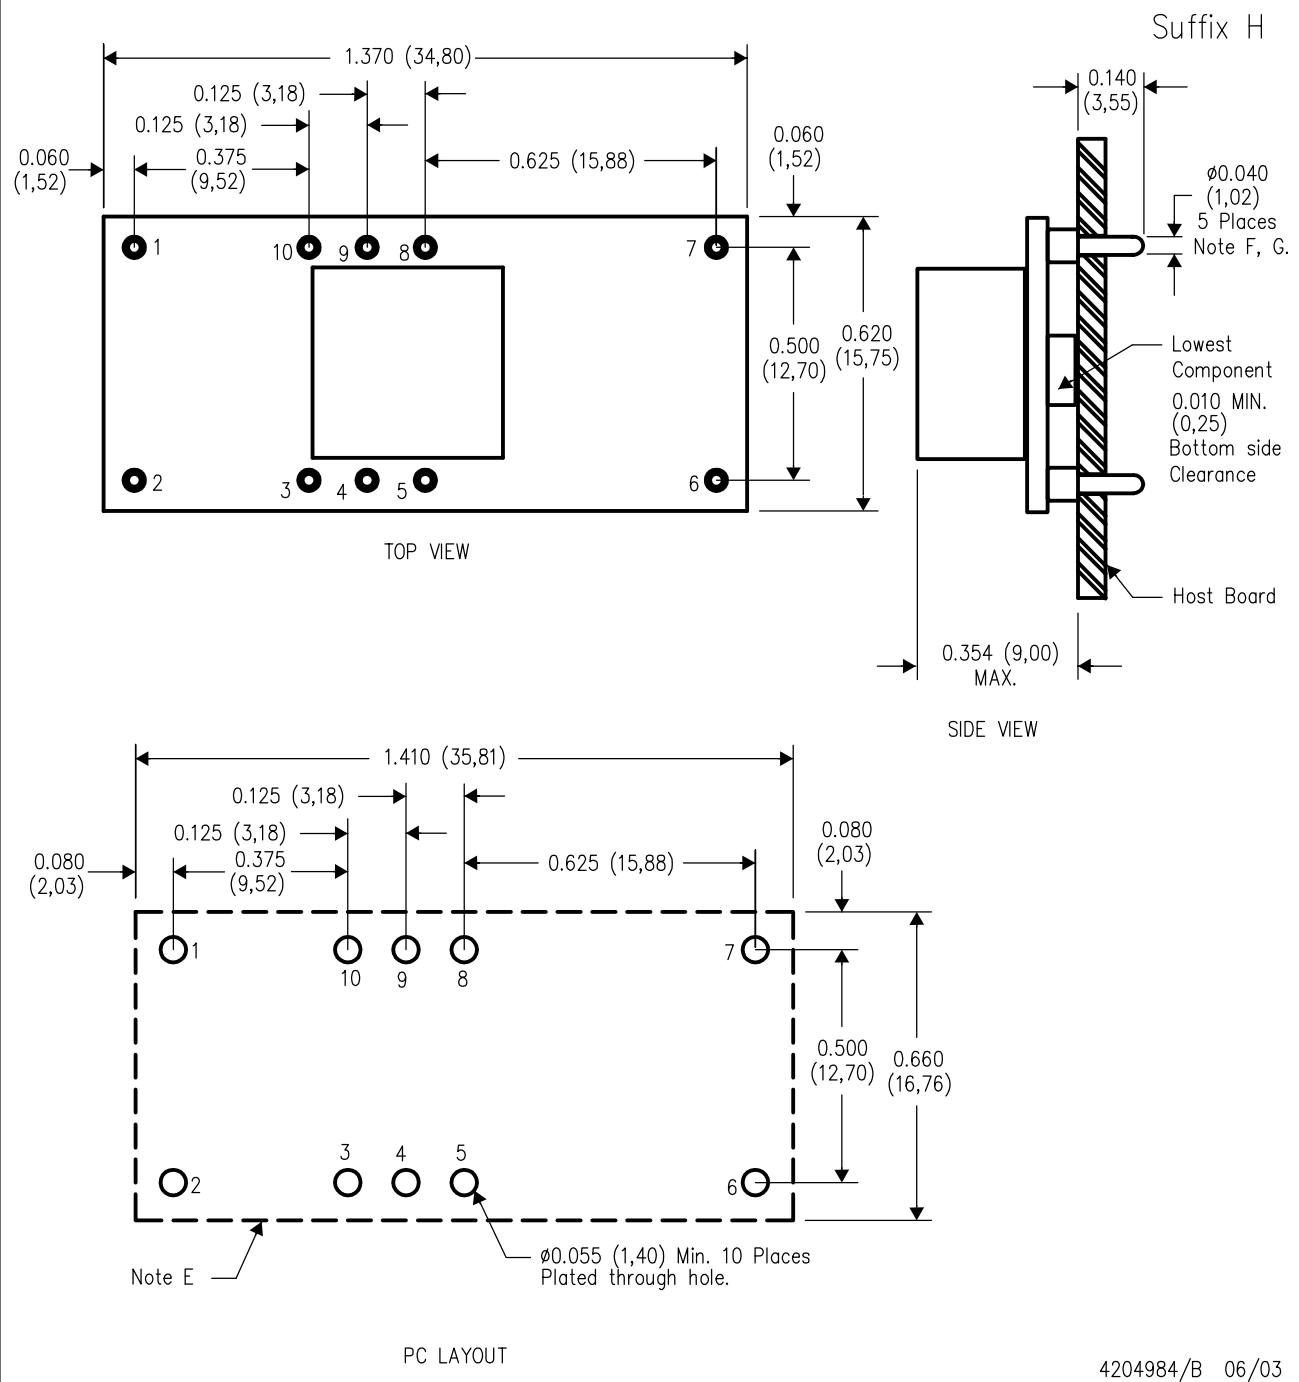


- NOTES:
- A. All linear dimensions are in inches (mm).
 - B. This drawing is subject to change without notice.
 - C. 2 place decimals are ± 0.030 ($\pm 0,76$ mm).
 - D. 3 place decimals are ± 0.010 ($\pm 0,25$ mm).
 - E. Recommended keep out area for user components.

- F. Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- G. All pins: Material - Copper Alloy
Finish - Tin (100%) over Nickel plate

EUJ (R-PDSS-B10)

DOUBLE SIDED MODULE

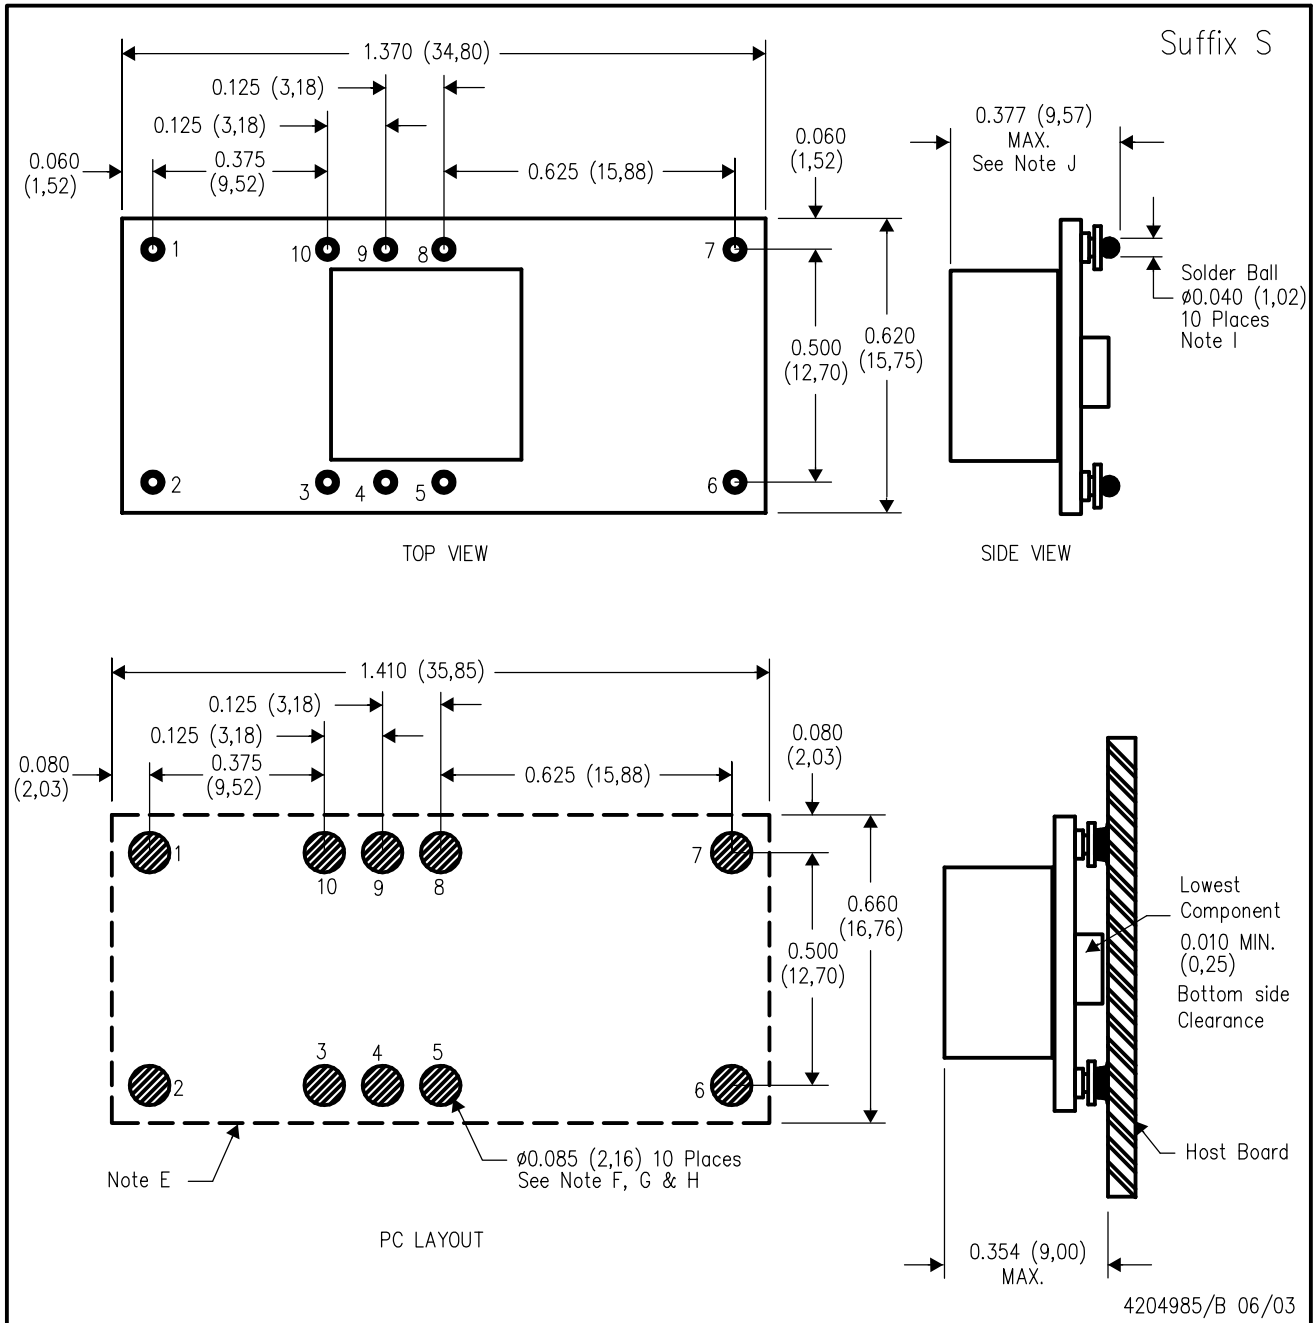

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265