




■ General Description

The AME385-1.2 is a micropower 2-terminal band-gap voltage regulator diode. It operates over a 15 μ A to 20mA current range. Each circuit is trimmed at wafer sort to provide a $\pm 0.2\%$ and $\pm 0.5\%$ initial tolerance. The design of the AME385-1.2 allows for a large range of load capacitances and operating currents. The low start-up current makes these part ideal for battery applications.

Analog Microelectronics offers this part in a TO-92 and SO-8 packages as well as the space saving SOT-23.


■ Functional Block Diagram

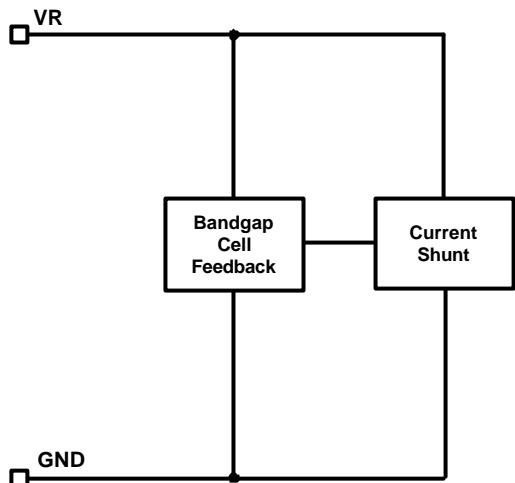

■ Features

- Small packages: SOT-23, TO-92, SO-8
- Tolerates capacitive loads
- Fixed reverse breakdown voltage of 1.235V
- Tight voltage tolerance ----- $\pm 0.20\%$, $\pm 0.5\%$
- Wide operating current ----- 15 μ A to 20mA
- Wide temperature range ----- -40°C to +85°C
- Low temperature coefficient --100ppm/ $^{\circ}$ C (max)
- Excellent transient response

■ Typical Application

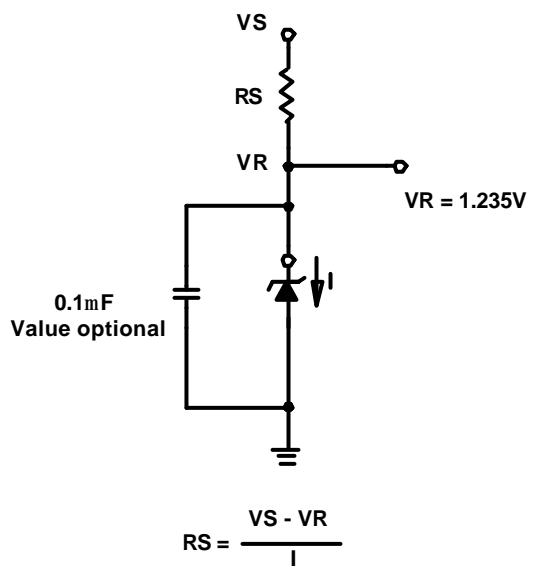

■ Applications

- Portable electronics
- Power supplies
- Computer peripherals
- Data acquisition systems
- Battery chargers
- Consumer electronics




AME, Inc.


AME385-1.2

Micropower Voltage Reference Diode


■ Pin Configuration

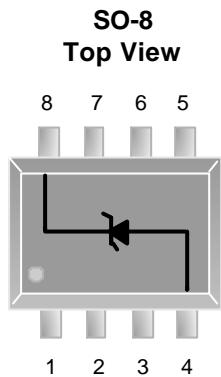


- AME 385-1.2**
- 1. NC
 - 2. NC
 - 3. NC
 - 4. -
 - 5. NC
 - 6. NC
 - 7. NC
 - 8. +

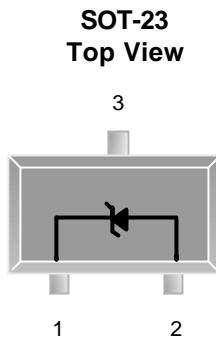

- AME 385-1.2**
- 1. +
 - 2. -
 - 3. NC*



- AME 385-1.2**
- 1. NC*
 - 2. +
 - 3. -



- AME 385-1.2**
- 1. +
 - 2. -

* The NC pin must float or be connected to - (negative)




AME, Inc.

AME385-1.2

Micropower Voltage Reference Diode

■ Ordering Information

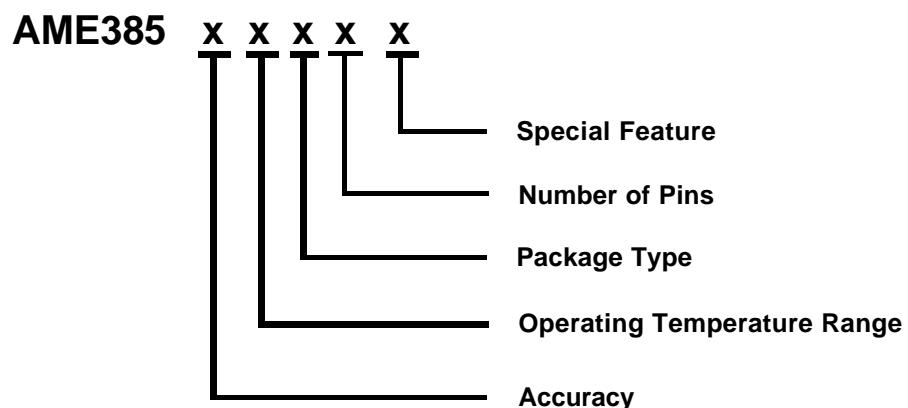

Accuracy	Operating Temperature Range	Package Type	Number of Pins	Special Feature
C: 0.2% A: 0.5%	E: -40 ^o C to 85 ^o C	A: TO-92 E: SOT-2X H: SO-8	A: 8 S: 2 T: 3	L: Low Profile Y: Lead Free & Low Profile Z: Lead Free



■ Ordering Information (contd.)

Part Number	Marking*	Accuracy	Package	Operating Temp. Range
AME385AEET	ABXww	0.5%	SOT-23	- 40°C to + 85°C
AME385AEETL	ABXww	0.5%	TSOT-23	- 40°C to + 85°C
AME385AEETY	ABXww	0.5%	TSOT-23	- 40°C to + 85°C
AME385AEETZ	ABXww	0.5%	SOT-23	- 40°C to + 85°C
AME385CEET	ACQww	0.2%	SOT-23	- 40°C to + 85°C
AME385CEETL	ACQww	0.2%	TSOT-23	- 40°C to + 85°C
AME385CEETY	ACQww	0.2%	TSOT-23	- 40°C to + 85°C
AME385CEETZ	ACQww	0.2%	SOT-23	- 40°C to + 85°C
AME385AEAS	AME 385 AEAS yyww	0.5%	TO-92-2	- 40°C to + 85°C
AME385AEASZ	AME 385 AEAS yyww	0.5%	TO-92-2	- 40°C to + 85°C
AME385AEAT	AME 385 AEAT yyww	0.5%	TO-92-3	- 40°C to + 85°C
AME385AEATZ	AME 385 AEAT yyww	0.5%	TO-92-3	- 40°C to + 85°C
AME385AEHA	385 AEHA yyww	0.5%	SO-8	- 40°C to + 85°C
AME385AEHAZ	385 AEHA yyww	0.5%	SO-8	- 40°C to + 85°C
AME385CEHA	385 CEHA yyww	0.2%	SO-8	- 40°C to + 85°C
AME385CEHAZ	385 CEHA yyww	0.2%	SO-8	- 40°C to + 85°C

* Package Option

Part Number	Package	Lead Pitch
AME385XEAX	TO-92 Taping	5.04mm
AME385XEAX-1	TO-92 Bulk	2.54mm

Note: yyww represents the date code

* A line on top of the first letter represents lead free plating such as ACQ.

Please consult AME sales office or authorized Rep./Distributor for the availability of voltage accuracy and package type.



■ Absolute Maximum Ratings

Parameter	Maximum	Unit
Supply Current	50	mA

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device

■ Recommended Operating Conditions

Parameter	Rating	Unit
Supply Current	100µA ~ 20mA	
Ambient Temperature Range	- 40 to + 85	°C
Junction Temperature	- 40 to + 125	°C

■ Thermal Information

Parameter	Maximum	Unit
Thermal Resistance	SOT-23	°C / W
	TO-92	
	SO-8	
Maximum Junction Temperature	150	°C
Maximum Lead Temperature (10 Sec)	300	°C



AME, Inc.

AME385-1.2

Micropower Voltage Reference Diode

■ Electrical Specifications

Unless otherwise specified, TA = 0~70°C, I_R = 100μA

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Reference Voltage, ±0.2%	V _{REF}	I _{REF} = 100μA	1.232	1.235	1.238	V
Reference Voltage, ±0.5%			1.229	1.235	1.241	V
Reference Voltage Change With Current	dV _{REF/I}	I _{MIN} ≤ I ≤ 1mA		1.5	3	mV
		1mA ≤ I ≤ 20mA		5	20	
Reverse Dynamic Impedance	RDI	I _R = 100μA, f=20Hz		1.5		Ohm
Wideband Noise (rms)	V _n	I _R = 100μA, 10 Hz < f < 10KHz		60		μV
Long term Stability		I _R = 100μA, T _A =25°C, T=1000 Hours		20		ppm
Reference Voltage Temp. Coeff.	V _{REFTC}	0°C < T _A < 70°C		100		ppm/°C
Operation Current	I _{OP}		0.015		20	mA




AME, Inc.


AME385-1.2

Micropower Voltage Reference Diode


Normalized Percentage Change vs. Temp.

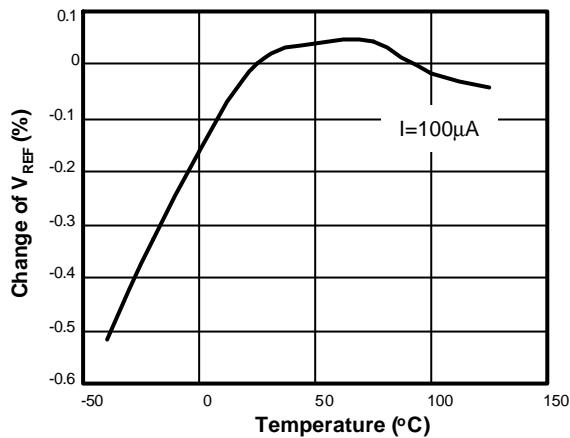


Reference Voltage Change vs. Current

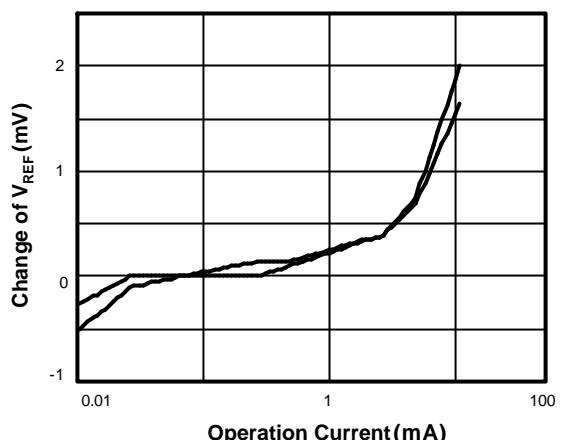


Reverse Characteristic

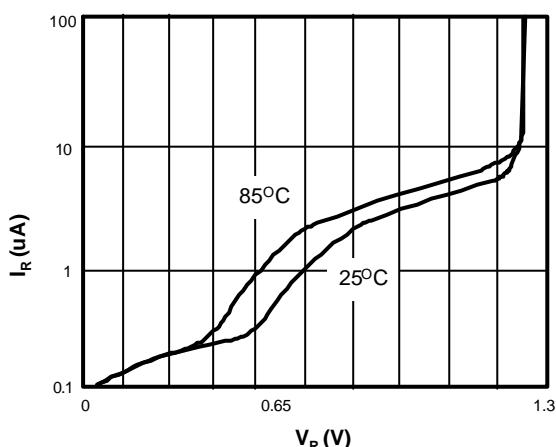

Forward Characteristic

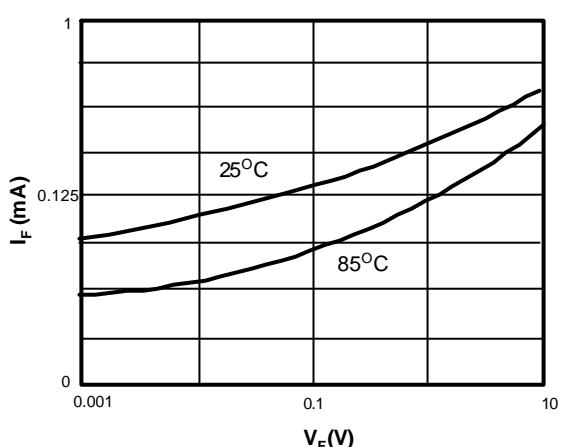

Line Transient Response

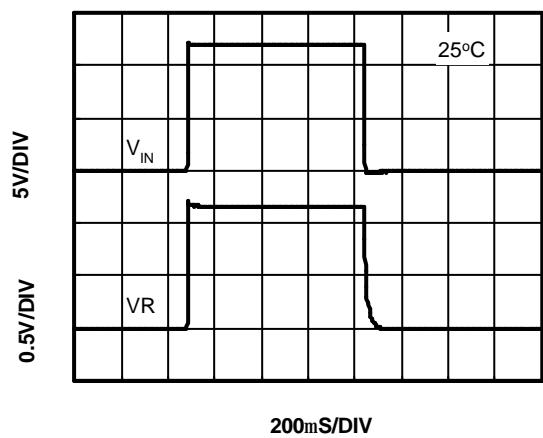




AME, Inc.

AME385-1.2

Micropower Voltage Reference Diode


■ Package Dimension

SOT-23

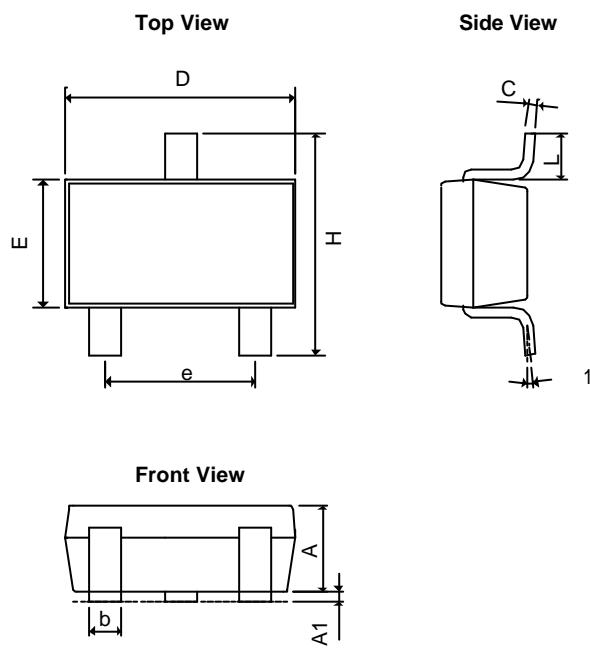

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.00	1.40	0.0394	0.0551
A ₁	0.00	0.15	0.0000	0.0059
b	0.35	0.50	0.0138	0.0197
C	0.09	0.25	0.0035	0.0098
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
q1	0°	10°	0°	10°

TSOT-23

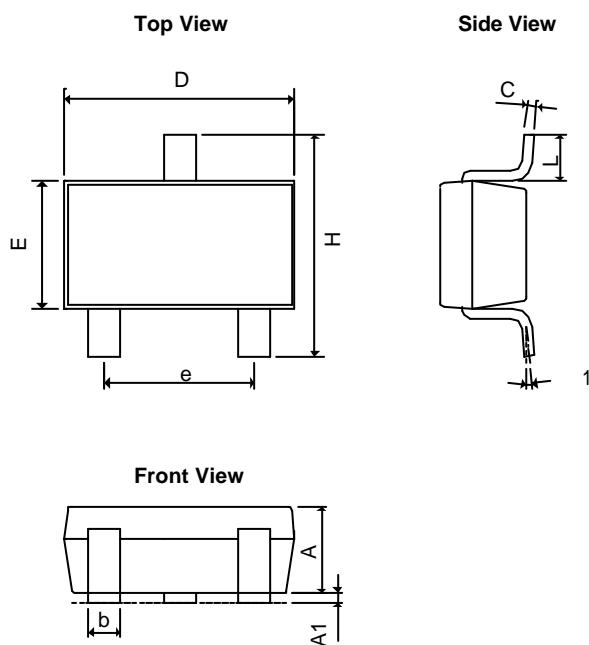


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A+A ₁	0.80	1.30	0.0315	0.0512
b	0.35	0.50	0.0138	0.0197
C	0.08	0.25	0.0031	0.0098
D	2.70	3.10	0.1063	0.1220
E	1.20	1.80	0.0472	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
q1	0°	10°	0°	10°



■ Package Dimension


TO-92-2 (bulk pack)

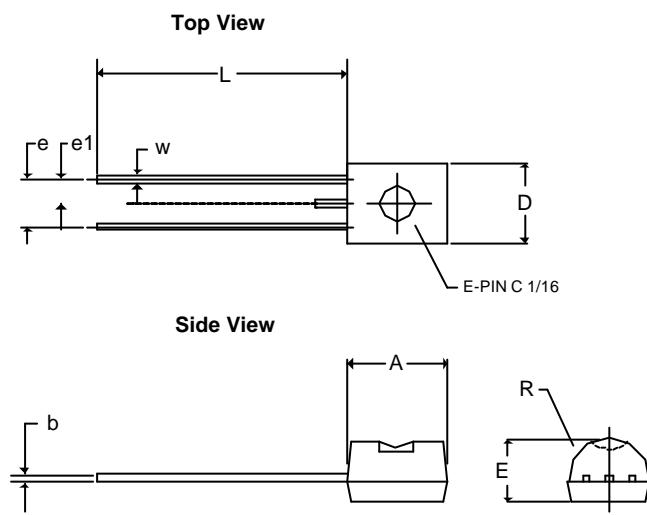

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.00	4.95	0.1575	0.1949
b	0.40REF		0.0157REF	
E	3.94REF		0.1551REF	
e	2.54REF		0.1000REF	
e1	1.27REF		0.0500REF	
L	12.70	15.49	0.5000	0.6098
R	2.29		0.0902	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:
1. Package outline exclusive of any mold flashes dimension.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.

TO-92-3 (bulk pack)

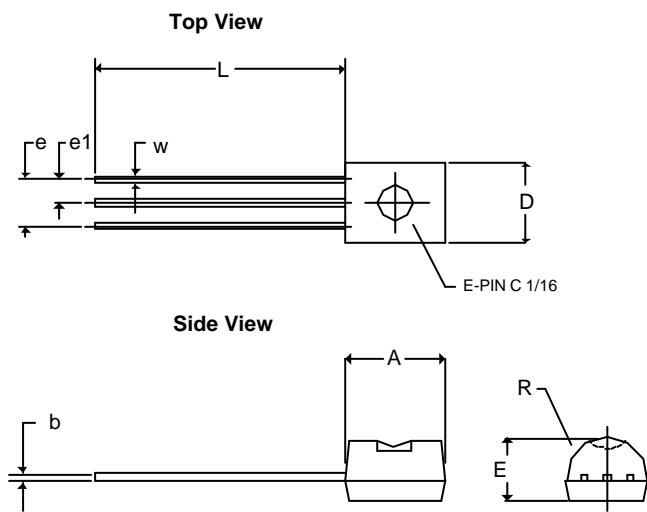

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	4.95	0.1102	0.1949
b	0.40REF		0.0157REF	
E	3.94REF		0.1551REF	
e	2.54REF		0.1000REF	
e1	1.27REF		0.0500REF	
L	12.70	15.49	0.5000	0.6098
R	2.29		0.0902	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:
1. Package outline exclusive of any mold flashes dimension.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.




AME, Inc.

AME385-1.2

Micropower Voltage Reference Diode

■ Package Dimension

TO-92-2 (tape pack)

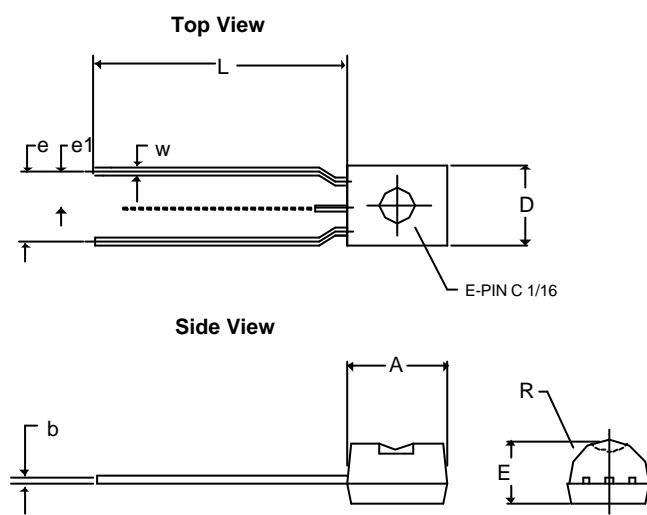


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	4.95	0.1102	0.1949
b	0.40REF		0.0157REF	
E	2.40	3.94	0.0945	0.1551
e	5.08REF		0.2REF	
e1	2.54REF		0.1REF	
L	12.70	15.49	0.5000	0.6098
R	2.00		0.0787	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:

1. Package outline exclusive of any mold flashes.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.

TO-92-3 (tape pack)

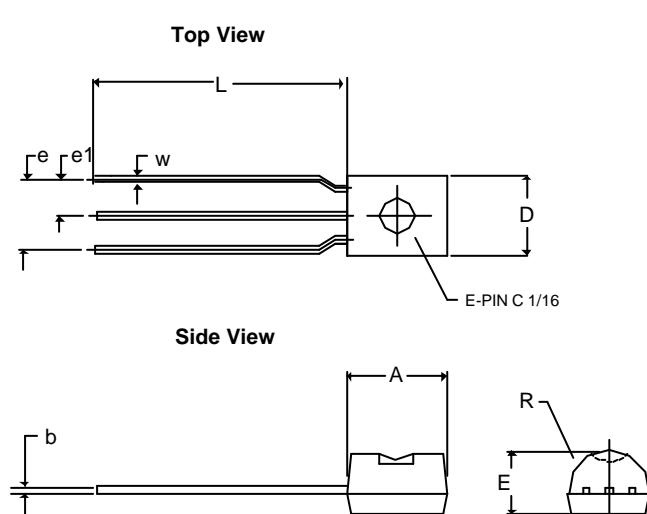

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	4.95	0.1102	0.1949
b	0.40REF		0.0157REF	
E	2.40	3.94	0.0945	0.1551
e	5.08REF		0.2REF	
e1	2.54REF		0.1REF	
L	12.70	15.49	0.5000	0.6098
R	2.00		0.0787	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:

1. Package outline exclusive of any mold flashes.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.




AME, Inc.

AME385-1.2

Micropower Voltage Reference Diode

■ Package Dimension

SO-8

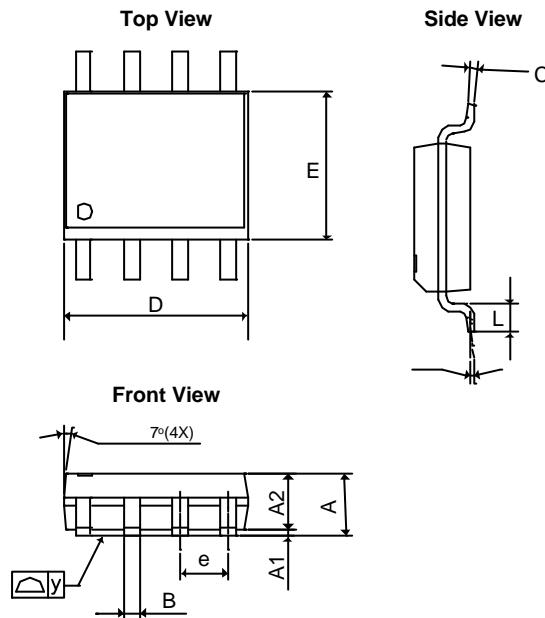

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.05315	0.0689
A ₁	0.10	0.25	0.00394	0.00984
A2	1.473 REF		0.058 REF	
B	0.33	0.51	0.01299	0.02008
C	0.19	0.25	0.00748	0.00984
D	4.80	5.00	0.18898	0.19685
E	3.80	4.00	0.14961	0.15748
e	1.27 BSC		0.050 BSC	
L	0.40	1.27	0.01575	0.05
y	-	0.10	-	0.004
q	0°	8°	0°	8°



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

©AME, Inc., December 2004
Document: 2003-DS385-1.2-F

Corporate Headquarter
AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District
Taipei 114, Taiwan.
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989

U.S.A (Subsidiary)
Analog Microelectronics, Inc.

3100 De La Cruz Blvd., Suite 201
Santa Clara, CA. 95054-2046
Tel : (408) 988-2388
Fax: (408) 988-2489