



#### **FEATURES**

- Member of the Texas Instruments Widebus™
   Family
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)

#### **DESCRIPTION/ORDERING INFORMATION**

This 1-bit to 4-bit address driver is designed for 1.65-V to 3.6-V  $V_{\rm CC}$  operation.

The SN74ALVCH16344 is used in applications in which four separate memory locations must be addressed by a single address.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry holds unused or undriven inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended.

# DGG OR DL PACKAGE (TOP VIEW)

			1
OE1	1	56	OE4
1B1	2	55	]8B1
1B2	<b>[</b> ]3	54	8B2
GND	4	53	GND
1B3	5	52	8B3
1B4	6	51	8B4
$V_{CC}$	7	50	$V_{cc}$
1A	8	49	8A
2B1	9	48	]7B1
2B2	10	47	7B2
GND	11	46	GND
2B3	12	45	7B3
2B4	13	44	7B4
2A	14	43	]7A
3A	15	42	]6A
3B1	16	41	6B1
3B2	17	40	]6B2
GND	18	39	]GND
3B3	19	38	6B3
3B4	20	37	]6B4
4A	21	36	]5A
$V_{CC}$	22	35	]v <sub>cc</sub>
4B1	23	34	]5B1
4B2	24	33	]5B2
GND	25	32	]GND
4B3	26	31	]5B3
4B4	27	30	]5B4
OE2	28	29	OE3
			•

#### ORDERING INFORMATION

T <sub>A</sub>	PACKAGE <sup>(1)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SSOP - DL	Tube	SN74ALVCH16344DL	ALVCH16344
-40°C to 85°C	330P - DL	Tape and reel	SN74ALVCH16344DLR	ALVON10344
	TSSOP - DGG	Tape and reel	SN74ALVCH16344DGGR	ALVCH16344

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

#### **FUNCTION TABLE**


INP	UTS	OUTPUT
ŌĒ	Α	Bn
L	Н	Н
L	L	L
Н	Н	Z

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments.



#### **LOGIC DIAGRAM (POSITIVE LOGIC)**

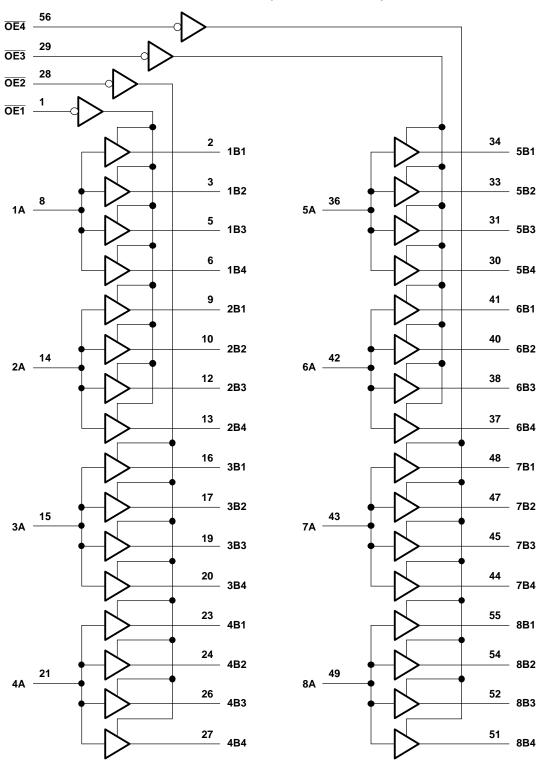



## SN74ALVCH16344 1-BIT TO 4-BIT ADDRESS DRIVER WITH 3-STATE OUTPUTS

## ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0.5	4.6	V
VI	Input voltage range <sup>(2)</sup>		-0.5	4.6	V
Vo	Output voltage range <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current			±50	mA
	Continuous current through each V <sub>CC</sub> or GN	ס		±100	mA
0	D	DGG package		64	00/11/
$\theta_{JA}$	Package thermal impedance (4)	DL package		56	°C/W
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) This value is limited to 4.6 V maximum.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.

## **RECOMMENDED OPERATING CONDITIONS**(1)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		1.65	3.6	V	
		V <sub>CC</sub> = 1.65 V to 1.95 V	$0.65 \times V_{CC}$			
$V_{IH}$	High-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2			
		V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$		
$V_{IL}$	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V	
		V <sub>CC</sub> = 2.7 V to 3.6 V		0.8		
VI	Input voltage	,	0	$V_{CC}$	V	
Vo	Output voltage		0	$V_{CC}$	V	
		V <sub>CC</sub> = 1.65 V		-4		
		High level cutout current	High lovel output ourrent	V <sub>CC</sub> = 2.3 V		-12
I <sub>OH</sub>	High-level output current	n-level output current $V_{CC} = 2.7 \text{ V}$		-12	MA	
		V <sub>CC</sub> = 3 V		-24		
		V <sub>CC</sub> = 1.65 V		4		
	Low level output ourrent	V <sub>CC</sub> = 2.3 V		12	A	
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 2.7 V		12	mA	
		V <sub>CC</sub> = 3 V		24		
Δt/Δν	Input transition rise or fall rate			10	ns/V	
T <sub>A</sub>	Operating free-air temperature		-40	85	°C	

All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.





#### **ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

Р	ARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup>	MAX	UNIT	
		I <sub>OH</sub> = -100 μA	1.65 V to 3.6 V	V <sub>CC</sub> - 0.2				
		$I_{OH} = -4 \text{ mA}$	1.65 V	1.2				
		I <sub>OH</sub> = -6 mA	2.3 V	2				
$V_{OH}$			2.3 V	1.7			V	
		I <sub>OH</sub> = -12 mA	2.7 V	2.2				
			3 V	2.4				
		I <sub>OH</sub> = -24 mA	3 V	2				
		I <sub>OL</sub> = 100 μA	1.65 V to 3.6 V			0.2		
		I <sub>OL</sub> = 4 mA	1.65 V			0.45		
.,		I <sub>OL</sub> = 6 mA	2.3 V			0.4	.,	
$V_{OL}$		10 10	2.3 V			0.7	V	
		I <sub>OL</sub> = 12 mA	2.7 V			0.4		
		I <sub>OL</sub> = 24 mA	3 V			0.55		
I		$V_I = V_{CC}$ or GND	3.6 V			±5	μΑ	
		V <sub>I</sub> = 0.58 V	1.65 V	25				
		V <sub>I</sub> = 1.07 V	1.65 V	-25				
		V <sub>I</sub> = 0.7 V	2.3 V	45				
I <sub>I(hold)</sub>		V <sub>I</sub> = 1.7 V	2.3 V	-45			μΑ	
, ,		V <sub>I</sub> = 0.8 V	3 V	75				
		V <sub>I</sub> = 2 V	3 V	-75				
		$V_I = 0 \text{ to } 3.6 \text{ V}^{(2)}$	3.6 V			±500		
I <sub>OZ</sub>		$V_O = V_{CC}$ or GND	3.6 V			±10	μΑ	
I <sub>CC</sub>		$V_I = V_{CC}$ or GND, $I_O = 0$	3.6 V			40	μΑ	
$\Delta I_{CC}$		One input at V <sub>CC</sub> - 0.6 V, Other inputs at V <sub>CC</sub> or GND	3 V to 3.6 V			750	μΑ	
	Control inputs	V V CND	221/		2.5			
C <sub>i</sub>	Data inputs	$V_{I} = V_{CC}$ or GND	3.3 V		3.5		pF	
Co	Outputs	$V_O = V_{CC}$ or GND	3.3 V		4		pF	

#### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 1.8 V	V <sub>CC</sub> = 2 ± 0.2	2.5 V V	V <sub>CC</sub> = 2	2.7 V	V <sub>CC</sub> = 3 ± 0.3	3.3 V V	UNIT
	(INFOT)	(OUTPUT)	TYP	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub>	А	В	(1)	1	4.6		4.6	1.4	4	ns
t <sub>en</sub>	ŌĒ	В	(1)	1	6.2		6.2	1.2	5.1	ns
t <sub>dis</sub>	ŌĒ	В	(1)	1	5.1		4.4	1.2	4	ns
t <sub>sk(o)</sub> (2)									0.35	ns
t <sub>sk(o)</sub> (3)									0.5	ns

This information was not available at the time of publication.

All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C. This is the bus-hold maximum dynamic current. It is the minimum overdrive current required to switch the input from one state to another.

Skew between outputs of same bank and same package (same transition)
Skew between outputs of all banks and same package (A1 through A8 tied together)







#### **OPERATING CHARACTERISTICS**


 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT	
_	Power dissipation capacitance	Outputs enabled	C 50 % F 40 MUI-	(1)	68	84	PF
$C_{pd}$	per bit (four outputs switching)	Outputs disabled	$C_L = 50 \text{ pF, f} = 10 \text{ MHz}$	(1)	11	14	рΓ

<sup>(1)</sup> This information was not available at the time of publication.




#### PARAMETER MEASUREMENT INFORMATION

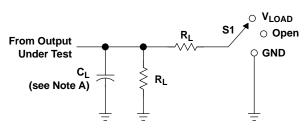

TEST	S1
t <sub>pd</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

LOAD CIRCUIT

V	IN	PUT	V	v	•	В	V
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$oldsymbol{V}_\Delta$
1.8 V	V <sub>CC</sub>	≤ <b>2</b> ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	500 Ω	0.15 V
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
3.3 V $\pm$ 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	<b>500</b> Ω	0.3 V

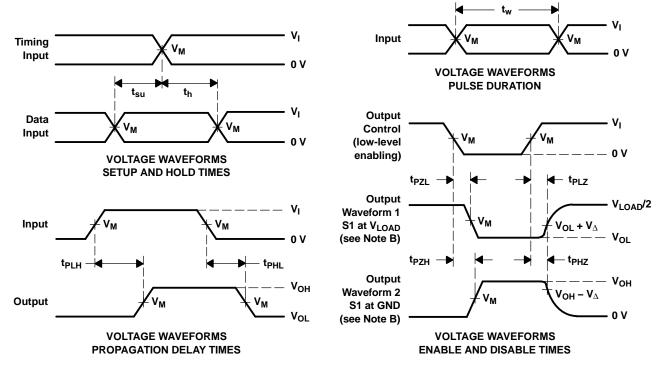

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{O} = 50 \Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms

www.ti.com 23-May-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
SN74ALVCH16344DGGR	Active	Production	TSSOP (DGG)   56	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16344
SN74ALVCH16344DGGR.B	Active	Production	TSSOP (DGG)   56	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16344
SN74ALVCH16344DL	Active	Production	SSOP (DL)   56	20   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16344
SN74ALVCH16344DL.B	Active	Production	SSOP (DL)   56	20   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16344

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025

#### TAPE AND REEL INFORMATION



# TAPE DIMENSIONS KO P1 BO W Cavity A0

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	U	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVCH16344DGGR	TSSOP	DGG	56	2000	330.0	24.4	8.6	15.6	1.8	12.0	24.0	Q1

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVCH16344DGGR	TSSOP	DGG	56	2000	367.0	367.0	45.0

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-May-2025

#### **TUBE**



#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74ALVCH16344DL	DL	SSOP	56	20	473.7	14.24	5110	7.87
SN74ALVCH16344DL.B	DL	SSOP	56	20	473.7	14.24	5110	7.87

## DL (R-PDSO-G56)

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.





SMALL OUTLINE PACKAGE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2025. Texas Instruments Incorporated