




## ABSOLUTE MAXIMUM RATINGS

|                                                 |                 |
|-------------------------------------------------|-----------------|
| Supply Voltage (VCC) . . . . .                  | 40V             |
| Output Drive Current,                           |                 |
| Continuous . . . . .                            | 0.125A          |
| Peak . . . . .                                  | 0.5A            |
| Output Minimum Voltage . . . . .                | −0.3V           |
| IAC Maximum Input Current . . . . .             | 1mA             |
| IMO Maximum Output Current . . . . .            | −2mA            |
| IMO Minimum Voltage . . . . .                   | −0.3V           |
| FB Maximum Input Voltage . . . . .              | 5V              |
| VCOMP Maximum Voltage . . . . .                 | 6.2V            |
| ICOMP Sourcing Current . . . . .                | Self-Limiting   |
| ICOMP Sinking Current . . . . .                 | 20mA            |
| ICOMP Maximum Voltage . . . . .                 | 7.2V            |
| Storage Temperature . . . . .                   | −65°C to +150°C |
| Junction Temperature . . . . .                  | −55°C to +150°C |
| Lead Temperature (Soldering, 10 sec.) . . . . . | +300°C          |

All voltages with respect to GND. Currents are positive into, negative out of the specified terminal. Consult Packaging Section of Databook for thermal limitations and considerations of packages.

## CONNECTION DIAGRAM

DIL-8, SOIC-8 (Top View)  
J or N, D Package

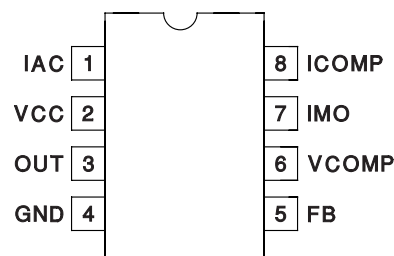

## ELECTRICAL CHARACTERISTICS

Unless otherwise stated, these parameters apply for  $T_A = -55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  for the UC1853;  $-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for the 2853; and  $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  for the UC3853;  $V_{CC} = 16\text{V}$ ,  $V_{FB} = 3\text{V}$ ,  $I_{AC} = 100\mu\text{A}$ ,  $V_{VCOMP} = 3.75\text{V}$ ,  $V_{ICOMP} = 3\text{V}$ ,  $T_A = T_J$ .

| PARAMETER                                   | TEST CONDITIONS                                                                   | MIN   | TYP  | MAX   | UNITS           |
|---------------------------------------------|-----------------------------------------------------------------------------------|-------|------|-------|-----------------|
| <b>Undervoltage Lockout Section</b>         |                                                                                   |       |      |       |                 |
| VCC Turn-on Threshold                       | $V_{VCOMP}$ , $V_{ICOMP}$ Open                                                    |       | 11.5 | 13    | V               |
| Hysteresis                                  |                                                                                   | 1.5   | 1.8  | 2.1   | V               |
| <b>Supply Current Section</b>               |                                                                                   |       |      |       |                 |
| $I_{VCC}$ Startup                           | $V_{CC} = 8\text{V}$ , $I_{AC} = 100\mu\text{A}$ ; $V_{VCOMP}$ , $V_{ICOMP}$ Open |       | 250  | 500   | $\mu\text{A}$   |
| $I_{VCC}$                                   | $I_{AC} = 0\mu\text{A}$ , $V_{ICOMP} = 0\text{V}$                                 |       | 10   | 15    | mA              |
| <b>Voltage Loop Error Amplifier Section</b> |                                                                                   |       |      |       |                 |
| Transconductance                            | $I_{OUT} = \pm 20\mu\text{A}$ 0-70C                                               | 300   | 450  | 575   | $\mu\text{mho}$ |
|                                             | Temperature                                                                       | 135   |      | 640   | $\mu\text{mho}$ |
| Input Voltage                               | 0-70C                                                                             | 2.925 | 3    | 3.075 | V               |
|                                             | Temperature                                                                       | 2.9   |      | 3.1   | V               |
| AVOL                                        | $V_{VCOMP} = 1\text{V} - 4\text{V}$                                               | 50    | 60   |       | dB              |
| Output Sink Current                         | $V_{FB} = 3.2\text{V}$ , $V_{VCOMP} = 3.75\text{V}$                               | 20    | 50   |       | $\mu\text{A}$   |
| Output Source Current                       | $V_{FB} = 2.8\text{V}$ , $V_{VCOMP} = 3.75\text{V}$                               |       | −50  | −20   | $\mu\text{A}$   |
| Output Voltage High                         |                                                                                   | 5.5   | 6    |       | V               |
| Output Voltage Low                          |                                                                                   |       | 0.6  | 0.9   | V               |
| <b>Current Loop Error Amplifier Section</b> |                                                                                   |       |      |       |                 |
| Offset Voltage                              |                                                                                   | 0     |      | 6     | mV              |
| Voltage Gain                                | $V_{ICOMP} = 1\text{V} - 4\text{V}$                                               |       | 70   |       | dB              |
| Sink Current                                | $V_{IMO} = 100\text{mV}$ , $V_{ICOMP} = 3\text{V}$                                | 1     |      |       | mA              |
| Source Current                              | $V_{IMO} = -0.1\text{V}$ , $V_{ICOMP} = 3\text{V}$                                |       | −150 | −80   | $\mu\text{A}$   |
| Output High                                 | $I_{ICOMP} = -50\text{mA}$                                                        | 6     | 6.8  |       | V               |
| Output Low                                  | $I_{ICOMP} = 50\mu\text{A}$                                                       |       | 0.3  | 0.8   | V               |
| PWM Modulator Gain                          | $V_{ICOMP} = 2\text{V} - 3\text{V}$ (Note 1)                                      |       | 20   |       | %/V             |

**ELECTRICAL CHARACTERISTICS**  
**(continued)**

Unless otherwise stated, these parameters apply for T<sub>A</sub> = –55°C to +125°C for the UC1853; –25°C to +85°C for the 2853; and 0°C to +70°C for the UC3853; V<sub>CC</sub> = 16V, V<sub>FB</sub> = 3V, I<sub>AC</sub> = 100μA, V<sub>VCOMP</sub> = 3.75V, V<sub>ICOMP</sub> = 3V, T<sub>A</sub> = T<sub>J</sub>.

| PARAMETER                       | TEST CONDITIONS                                            | MIN   | TYP  | MAX   | UNITS           |
|---------------------------------|------------------------------------------------------------|-------|------|-------|-----------------|
| <b>Multiplier Section</b>       |                                                            |       |      |       |                 |
| Output Current – IAC Limited    | V <sub>CC</sub> = 11V, V <sub>VCOMP</sub> = 6V             | –230  | –200 | –170  | μA              |
| Output Current – Zero           | I <sub>AC</sub> = 0μA                                      | –2    | –0.2 | 2     | μA              |
| Output Current – Power Limited  | V <sub>CC</sub> = 12V, V <sub>VCOMP</sub> = 5.5V           | –236  | –178 | –168  | μA              |
| Output Current                  | V <sub>CC</sub> = 12V, V <sub>VCOMP</sub> = 2V             |       | –22  |       | μA              |
|                                 | V <sub>CC</sub> = 12V, V <sub>VCOMP</sub> = 5V             |       | –156 |       | μA              |
|                                 | V <sub>CC</sub> = 40V, V <sub>VCOMP</sub> = 2V             |       | –2   |       | μA              |
|                                 | V <sub>CC</sub> = 40V, V <sub>VCOMP</sub> = 5V             |       | –14  |       | μA              |
| Multiplier Gain Constant        | V <sub>CC</sub> = 12V, V <sub>VCOMP</sub> = 5.5V (Note 2)  | –1.05 | –0.9 | –0.75 | V <sup>–1</sup> |
| <b>Oscillator Section</b>       |                                                            |       |      |       |                 |
| Oscillator Initial Frequency    | T <sub>A</sub> = 25°C                                      | 67.5  | 75   | 82.5  | kHz             |
| Oscillator Frequency            | Line, Load, Temperature                                    | 56    | 75   | 94    | kHz             |
| Synchronization Frequency Range |                                                            |       |      | 100   | kHz             |
| Synchronization Pulse Amplitude | Pulse slew rate = 100V/μsec (Note 3)                       |       | 2    |       | V               |
| <b>Output Driver Section</b>    |                                                            |       |      |       |                 |
| Maximum Output Voltage          | 0mA load, V <sub>CC</sub> = 20V                            | 12    | 15   | 17.5  | V               |
| Output High                     | 0mA load, V <sub>CC</sub> = 12V, ref. to V <sub>CC</sub>   | –2.7  | –1.7 |       | V               |
|                                 | –50mA load, V <sub>CC</sub> = 12V, ref. to V <sub>CC</sub> | –3    | –2.2 |       | V               |
| Output Low (Device Inactive)    | V <sub>CC</sub> = 0V, 20mA load (Sinking)                  |       | 0.9  | 2.0   | V               |
| Output Low (Device Active)      | 50mA load (Sinking)                                        |       | 0.5  | 1     | V               |
| OUT Rise Time                   | 1nF from OUT to GND                                        |       | 55   | 100   | ns              |
| OUT Fall Time                   | 1nF from OUT to GND                                        |       | 35   | 100   | ns              |
| OUT Maximum Duty Cycle          | V <sub>ICOMP</sub> = 0V                                    | 88    | 93   |       | %               |
| <b>OVP Comparator Section</b>   |                                                            |       |      |       |                 |
| Threshold Voltage               | Volts Above EA Input V                                     | 90    | 150  |       | mV              |
| Hysteresis                      |                                                            |       | 80   |       | mV              |

Note 1:

$$PWM \text{ modulator gain} = \frac{\Delta DutyCycle}{\Delta V_{ICOMP}}$$

Note 2:

$$Gain \text{ constant } (K) = \frac{I_{AC} \bullet (V_{COMP} - 1.5V)}{I_{MO} \bullet V_{CC} \bullet \frac{V_{CC}}{64}}, V_{CC} = 12V.$$

Note 3.

Synchronization is accomplished with a falling edge of 2V magnitude and 100V/μsec slew rate.

## PIN DESCRIPTIONS

**FB:** Voltage Amplifier Inverting Input, Overvoltage Comparator Input, Sync Input. This pin serves three functions. FB accepts a fraction of the power factor corrected output voltage through a voltage divider, and is nominally regulated to 3V. FB voltages 5% greater than nominal will trip the overvoltage comparator, and shut down the output stage until the output voltage drops 5%. The internal oscillator can be synchronized through FB by injecting a 2V clock signal through a capacitor. To prevent false tripping of the overvoltage comparator, the clock signal must have a fast falling edge, but a slow rising edge. See Application Note U-159 for more information.

**GND:** Ground. All voltages are measured with respect to GND. The VCC bypass capacitor should be connected to ground as close to the GND pin as possible.

**IAC:** AC Waveform Input. This input provides voltage waveform information to the multiplier. The current loop will try to produce a current waveform with the same shape as the IAC signal. IAC is a low impedance input, nominally at 2V, which accepts a current proportional to the input voltage. Connect a resistor from the rectified input line to IAC which will conduct 500mA at maximum line voltage.

**IMO:** Multiplier Output and Current Sense Inverting Input. The output of the multiplier and the inverting input of the current amplifier are connected together at IMO. Avoid bringing this input below -0.5V to prevent the internal protection diode from conducting. The multiplier output is a current, making this a summing node and allowing a differential current error amplifier configuration to reject ground noise. The input resistance at this node should be 3.9k to minimize input bias current induced offset voltage. See the Applications section for the recommended circuit configuration.

**OUT:** Gate Driver Output. OUT provides high current gate drive for the external power MOSFET. A 15V clamp pre-

vents excessive MOSFET gate-to-source voltage so that the UC3853 can be operated with VCC and high as 40V. A series gate resistor of at least 5 ohms should be used to minimize clamp voltage overshoot. In addition, a Schottky diode such as a 1N5818 connected between OUT and GND may be necessary to prevent parasitic substrate diode conduction.


**ICOMP:** Current Loop Error Amplifier Output. The current loop error amplifier is a conventional operational amplifier with a 150μA current source class A output stage. Compensate the current loop by placing an impedance between ICOMP and IMO. This output can swing above the oscillator peak voltage, allowing zero duty cycle when necessary.

**VCC:** Input Supply Voltage. This pin serves two functions. It supplies power to the chip, and an input voltage level signal to the squarer circuit. When this input is connected to a DC voltage proportional to the AC input RMS voltage, the voltage loop gain is reduced by

$$\frac{64}{V_{CC}^2}.$$

This configuration maintains constant loop gain. The UC3853 input voltage range extends from 12V to 40V, allowing an AC supply voltage range in excess of 85VAC to 265VAC. Bypass VCC with at least a 0.1μF ceramic capacitor to ensure proper operation. See the Applications section for the recommended circuit configuration.

**VCOMP:** Voltage Loop Error Amplifier Output. The voltage loop error amplifier is a transconductance type operational amplifier. A feedback impedance between VCOMP and FB for loop compensation must be avoided to maintain proper operation of the overvoltage protection comparator. Instead, compensate the voltage loop with an impedance between VCOMP and GND. When VCOMP is below 1.5V, the multiplier output current is zero.



## PACKAGING INFORMATION

| Orderable part number     | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">UC2853D</a>   | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -25 to 85    | UC2853D             |
| UC2853D.A                 | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -25 to 85    | UC2853D             |
| <a href="#">UC2853DTR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -25 to 85    | UC2853D             |
| UC2853DTR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -25 to 85    | UC2853D             |
| <a href="#">UC2853N</a>   | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -25 to 85    | UC2853N             |
| UC2853N.A                 | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -25 to 85    | UC2853N             |
| <a href="#">UC3853D</a>   | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3853D             |
| UC3853D.A                 | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3853D             |
| <a href="#">UC3853DTR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3853D             |
| UC3853DTR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3853D             |
| <a href="#">UC3853N</a>   | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3853N             |
| UC3853N.A                 | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3853N             |
| UC3853NG4                 | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3853N             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| UC2853DTR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| UC3853DTR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| UC2853DTR | SOIC         | D               | 8    | 2500 | 356.0       | 356.0      | 35.0        |
| UC3853DTR | SOIC         | D               | 8    | 2500 | 356.0       | 356.0      | 35.0        |

## TUBE



\*All dimensions are nominal

| Device    | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------|--------------|--------------|------|-----|--------|--------|--------|--------|
| UC2853D   | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| UC2853D.A | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| UC2853N   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| UC2853N.A | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| UC3853D   | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| UC3853D.A | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| UC3853N   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| UC3853N.A | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| UC3853NG4 | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated