

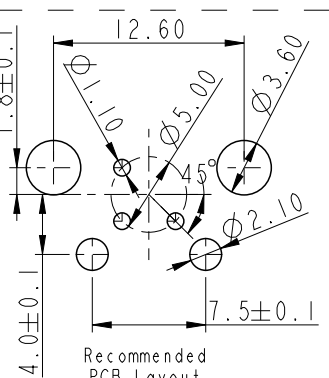

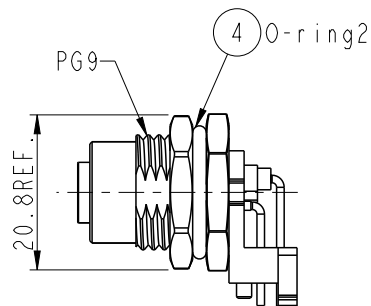


ALTW DCC.
2012.06.13
ISSUED



REV.	ECN NO.	DATE	SIGN	DESCRIPTION



ALTW
CONFIDENTIAL
2012-06-11
R&D DEPT.



Conn.
Pin Assignments
Front View

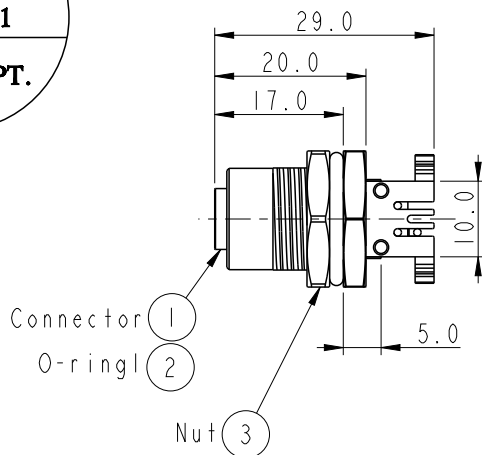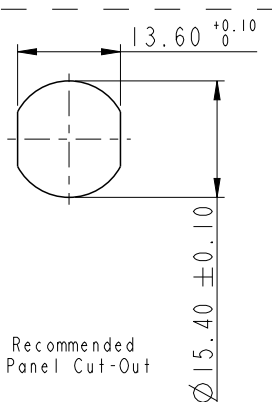

Note:

- * DD Important Dimension To Check.
- * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours
(防水等級: IP68)
(IP68: 1 米水深 24 小時)
- * Connector: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Shell: Zinc Alloy, Nickel Plated.
- * Nut: Zinc Alloy, Nickel Plated.
- * O-ring1: Silicon, Gray
- * O-ring2: Silicon, Black
- * Boardlock: PBT+PC, Black
- * For Panel Thickness Max. 4.5mm
- * For PCB Thickness Max. 1.6mm

UNIT: mm		TITLE		ITEM NO		DRAWN BY		DATE	
		SENSOR, M12, 90° PANEL 3PIN FCONN FPIN		12-03PFFR-SF8001		Tao-cheng		2012-06-11	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		1:1		12-03PFFR-SF8001		Jimmy		2012-06-11	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Victor		2012-06-11	
ANGLES ±1°		REV.							
		A							
		WC-REV.							
		A.1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.