

Introduction

Microchip SmartFusion® 2 SoC FPGAs integrate a fourth-generation, flash-based FPGA fabric, an Arm® Cortex® -M3 processor, and high-performance communications interfaces on a single chip. The SmartFusion 2 family is the industry's lowest-power, most reliable, and highest-security programmable logic solution.

SmartFusion 2 SoC FPGAs offer up to 3.6X the gate density and up to 2X the performance of previous flash-based FPGA families, and also include multiple memory blocks and multiply-accumulate blocks for DSP processing. The 166 MHz Arm Cortex-M3 processor is enhanced with an embedded Trace Macro Cell (ETM), a Memory Protection Unit (MPU), an 8-KB instruction cache, and additional peripherals, including Controller Area Network (CAN), gigabit Ethernet, and a high-speed Universal Serial Bus (USB). High-speed serial interfaces include PCI Express (PCIe), 10-Gbps Attachment Unit Interface (XAUI)/XGMII Extended Sublayer (XGXS), plus native Serialization/Deserialization (SerDes) communication. The DDR2/DDR3 memory controllers available in the devices provide high-speed memory interfaces.

Acronyms

The following table lists the acronyms used in the product brief.

Table 1. Acronyms

Acronyms	Descriptions
AES	Advanced Encryption Standard
AHB	Advanced High-performance Bus
APB	Advanced Peripheral Bus
AT	Anti-Tamper
AXI	Advanced eXtensible Interface
CCC	Clock Conditioning Circuits
COMM_BLK	Communication Block
DDR	Double Data Rate
DPA	Differential Power Analysis
ECC	Elliptical Curve Cryptography
EDAC	Error Detection and Correction
FACC	Fabric Alignment Clock Controller
FDDR	DDR2/3 Controller in FPGA Fabric
FIC	Fabric Interface Controller
HPMS	High-Performance Memory Subsystem
IAP	In-Application Programming
IP	Intellectual Property
MACC	Multiply Accumulate
MDDR	DDR2/3 controller in HPMS
PLL	Phase-Locked Loops
SECCED	Single Error Correct Double Error Detect
SEU	Single Event Upset
SHA	Secure Hashing Algorithm

.....continued

Acronyms	Descriptions
XAUI	10 Gbps Attachment Unit Interface
XGMII	10 Gigabit Media Independent Interface
XGXS	XGMII Extended Sublayer

Table of Contents

Introduction.....	1
Acronyms.....	1
1. SmartFusion 2 SoC FPGA Overview.....	4
1.1. Features.....	4
1.2. Block Diagram.....	8
1.3. I/Os Per Package.....	10
1.4. Ordering Information.....	13
1.5. Temperature Grades.....	14
1.6. SmartFusion 2 Device Status.....	15
1.7. SmartFusion 2 Datasheet and Pin Descriptions.....	15
1.8. Marking Specifications.....	15
2. SmartFusion 2 SoC FPGA Feature Description.....	18
2.1. Highest Security Devices.....	19
2.2. Low Power.....	20
2.3. High-Performance FPGA Fabric.....	20
2.4. Microcontroller Subsystem.....	21
2.5. Clock Sources.....	24
2.6. High-Speed Serial Interfaces.....	25
2.7. High-Speed Memory Interfaces: DDRx Memory Controllers.....	25
2.8. SmartFusion 2 Development Tools.....	26
3. Revision History.....	30
The Microchip Website.....	34
Product Change Notification Service.....	34
Customer Support.....	34
Microchip Devices Code Protection Feature.....	34
Legal Notice.....	34
Trademarks.....	35
Quality Management System.....	36
Worldwide Sales and Service.....	37

1. SmartFusion 2 SoC FPGA Overview

The following sections describe the key features and the block diagram of SmartFusion 2 SoC FPGAs.

1.1 Features

The following sections list the features of SmartFusion 2 SoC FPGAs.

1.1.1 Reliability

- SEU-Immune
 - Zero FIT FPGA configuration cells
- Junction Temperature
 - 125 °C—military temperature
 - 100 °C—industrial temperature
 - 85 °C—commercial temperature
 - 125 °C—automotive
- SECEDED protection on the following
 - Ethernet buffers
 - CAN message buffers
 - Cortex-M3 embedded scratch pad memory (eSRAMs)
 - USB buffers
 - PCIe buffer
 - DDR memory controllers with optional SECEDED modes
- Buffers implemented with SEU resistant latches on the following
 - DDR bridges (MSS, MDDR, and FDDR)
 - Instruction cache
 - MMUART FIFOs
 - SPI FIFOs
- NVM integrity check at power-up and on demand
- No external configuration memory required—instant-on, retains configuration when powered OFF

1.1.2 Security

- Design Security Features (available on all devices)
 - IP protection through unique security features and use models new to the PLD industry
 - Built-in CRI DPA pass-through license from Rambus Cryptography Research
 - Encrypted user key and bitstream loading, enabling programming in less-trusted locations
 - Supply-chain assurance device certificate
 - Enhanced anti-tamper features
 - Zeroization
- Data Security Features
 - Non-deterministic random bit generator (NRBG)
 - User cryptographic services (AES-256, SHA-256, and ECC engine)
 - User Physically Unclonable Function (PUF) key enrollment and regeneration

- CRI pass-through DPA patent portfolio license
- Hardware firewalls protecting Microcontroller Subsystem (MSS) memories

1.1.3 Low Power

- Low static and dynamic power
 - Flash*Freeze mode for fabric
- Power as low as 13 mW/Gbps per lane for SerDes devices
- Up to 50% lower total power than competing SoC devices

1.1.4 High Performance

- Efficient 4-input LUTs with carry chains for high performance and low power
- Up to 236 blocks of dual-port 18-kb SRAM (LSRAM) with 400 MHz synchronous performance (512 × 36, 512 × 32, 1 kb × 18, 1 kb × 16, 2 kb × 9, 2 kb × 8, 4 kb × 4, 8 kb × 2, or 16 kb × 1)
- Up to 240 blocks of three-port 1-kb SRAM with two read ports and one write port (micro SRAM)
- High-performance DSP signal processing:
 - Up to 240 fast math blocks with 18 × 18 signed multiplication, 17 × 17 unsigned multiplication and 44-bit accumulator

1.1.5 Microcontroller Subsystem

- Hard 166-MHz 32-Bit Arm Cortex-M3 processor
 - 1.25 DMIPS/MHz
 - 8 KB instruction cache
 - Embedded Trace Macrocell (ETM)
 - Memory Protection Unit (MPU)
 - Single cycle multiplication, hardware divide
 - JTAG debug (4 wires), Serial Wire Debug (SWD, 2 wires), and Serial Wire Viewer (SWV) interfaces
- 64 KB Embedded SRAM (eSRAM)
- Up to 512 KB Embedded Nonvolatile Memory (eNVM)
- Triple-Speed Ethernet (TSE) 10/100/1000 Mbps MAC
- USB 2.0 high speed on-the-go (OTG) controller with ULPI interface
- 2.0B-compliant CAN controller, conforms to ISO11898-1, 32 transmit and 32 receive buffers
- Two SPI ports, two I²C ports, and multi-mode UARTs (MMUART) peripherals
- Hardware-based watchdog timer
- One general-purpose 64-bit (or two 32-bit) timer(s)
- Real-Time Calendar/Counter (RTC)
- DDR bridge (4-port data R/W buffering bridge to DDR memory) with 64-bit AXI interface
- Non-blocking, multi-layer AHB bus matrix allowing multi-host scheme supporting 10 hosts and 7 clients
- Two AHB-Lite/APB3 interfaces to FPGA fabric (host/client-capable)
- Two DMA controllers to offload data transactions from the Cortex-M3 processor
 - 8-channel Peripheral DMA (PDMA) for data transfer between MSS peripherals and memory
 - High-Performance DMA (HPDMA) for data transfer between eSRAM and DDR memories

1.1.6 Clocking Resources

- Clock sources
 - Up to two high precision 32 KHz to 20 MHz main crystal oscillator
 - 1 MHz embedded RC oscillator
 - 50 MHz embedded RC oscillator
- Up to eight CCCs with up to eight integrated analog PLLs
 - Output clock with eight output phases and 45° phase difference (multiply/divide and delay capabilities)
 - Frequency: 1 MHz to 200 MHz input, 20 MHz to 400 MHz output

1.1.7 High-Speed Serial Interfaces

- Up to 16 SerDes lanes, each supporting the following
 - XGXS/XAU1 extension (to implement a 10-Gbps (XGMII) Ethernet PHY interface)
 - Native EPCS SerDes interface that facilitates implementation of serial rapidIO (SRIO) in fabric or an SGMII interface to the Ethernet MAC in MSS
- PCI express (PCIe) endpoint controller
 - ×1, ×2, and ×4 lane PCI express core
 - Maximum payload size of up to 256 bytes
 - 64-bit/32-bit AXI interface and 64-Bit/32-Bit AHB Host and Client interfaces to the application layer

1.1.8 High-Speed Memory Interfaces

- Up to two high-speed DDRx memory controllers
 - MSS DDR (MDDR) and fabric DDR (FDDR) controllers
 - Supports LPDDR/DDR2/DDR3
 - Maximum 333 MHz DDR clock rate
 - SECEDED enable/disable feature
 - Supports various DRAM bus width modes, ×8, ×9, ×16, ×18, ×32, ×36
 - Supports command reordering to optimize memory efficiency
 - Supports data reordering, returning critical word first for each command
- SDRAM support through the SMC_FIC and additional soft SDRAM memory controller

1.1.9 Operating Voltage and I/Os


- 1.2V core voltage
- Multi-standard user I/Os (MSIO/MSIOD)
 - LVTTTL/LVCMOS 3.3V (MSIO Only)
 - LVCMOS 1.2V, 1.5V, 1.8V, 2.5V
 - DDR (SSTL2_1, SSTL2_2)
 - LVDS, MLVDS, Mini-LVDS, RSDS differential standards
 - PCI
 - LVPECL (receiver only)
- DDR I/Os (DDRIO)
 - DDR2, DDR3, LPDDR, SSTL2, SSTL18, HSTL
 - LVCMOS 1.2V, 1.5V, 1.8V, 2.5V

- Market-leading number of user I/Os with 5G SerDes

1.2 Block Diagram

The following figure shows the various blocks available in SmartFusion 2 SoC FPGAs, such as MSS, system controller, FPGA fabric Logic Elements (LE), and user I/Os.

Figure 1-1. SmartFusion 2 SoC FPGA Block Diagram

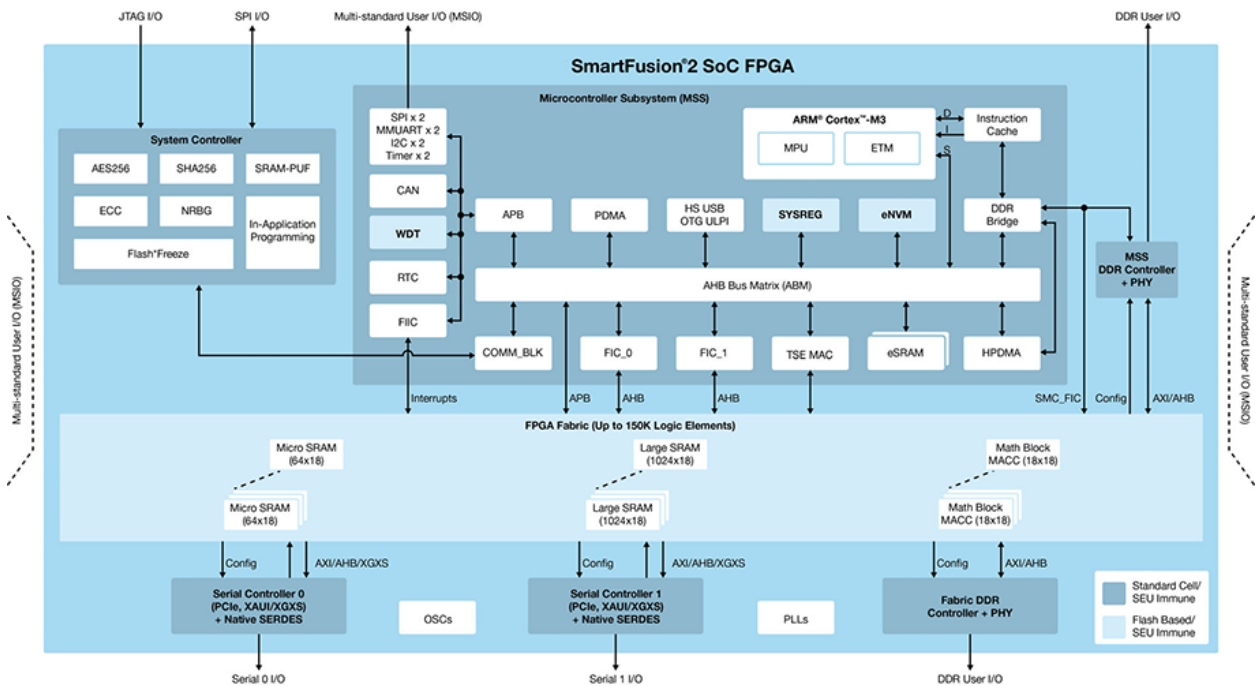

The following table lists the features supported by devices in the SmartFusion 2 SoC FPGA family.

Table 1-1. SmartFusion 2 SoC FPGA Product Family^{1 2}

Peripheral	Feature	M2S005 (S)	M2S010 (S/T/TS)	M2S025 (T/TS)	M2S050 (T/TS)	M2S060 (T/TS)	M2S090 (T/TS)	M2S150 (T/TS)
Logic/DSP	Maximum logic elements (4-input LUT + DFF) ³	6,060	12,084	27,696	56,340	56,520	86,184	146,124
	Math blocks (18 × 18)	11	22	34	72	72	84	240
	Fabric interface controllers	1	1	1	2	1	1	2
	PLLs and CCCs	2	2	6	6	6	6	8
	Data security	AES256, SHA256, and RNG	AES256, SHA256, and RNG	AES256, SHA256, and RNG	AES256, SHA256, and RNG	AES256, SHA256, RNG, ECC, and PUF	AES256, SHA256, RNG, ECC, and PUF	AES256, SHA256, RNG, ECC, and PUF

.....continued

Peripheral	Feature	M2S005 (S)	M2S010 (S/T/TS)	M2S025 (T/TS)	M2S050 (T/TS)	M2S060 (T/TS)	M2S090 (T/TS)	M2S150 (T/TS)
MSS	Cortex-M3 + instruction cache	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	eNVM (KB)	128	256	256	256	256	512	512
	eSRAM (KB)	64	64	64	64	64	64	64
	eSRAM (KB) Non-SECDED	80	80	80	80	80	80	80
	CAN	1	1	1	1	1	1	1
	10/100/1000 Ethernet	1	1	1	1	1	1	1
	High-speed USB	1	1	1	1	1	1	1
	Multi-mode UART	2	2	2	2	2	2	2
	SPI	2	2	2	2	2	2	2
	I ² C	2	2	2	2	2	2	2
	Timer	2	2	2	2	2	2	2
Fabric Memory	LSRAM 18K blocks	10	21	31	69	69	109	236
	uSRAM 1K blocks	11	22	34	72	72	112	240
	Total RAM (Kb)	191	400	592	1314	1314	2074	4488
High Speed	DDR Controllers (Count × Width)	1 × 18	1 × 18	1 × 18	2 × 36	1 × 18	1 × 18	2 × 36
	SerDes lanes (T)	0	4	4	8	4	4	16
	PCIe endpoints	0	1	1	2	2	2	4
User I/Os	MSIO (3.3V)	119	123	157	139	279	309	292
	MSIOD (2.5V)	28	40	40	62	40	40	106
	DDRIO (2.5V)	66	70	70	176	76	76	176
	Total user I/Os	209	233	267	377	395	425	574
Grades	Commercial (C) Industrial (I) Military (M) Automotive (T2)	C, I, T2	C, I, M, T2	C, I, M, T2	C, I, M, T2	C, I, M, T2	C, I, M, T2	C, I, M

Notes:

1. Feature availability is package dependent.
2. Data security features are only available in S and TS devices.
3. Total logic might vary based on utilization of DSP and memories in the design. See [UG0445: IGLOO2 FPGA and SmartFusion2 SoC FPGA Fabric User Guide](#) for more information.

1.3 I/Os Per Package

The following table lists the package options.

Table 1-2. Package Options

Packages	Pitch (mm)	Length × Width (mm)
FCSG158	0.5	9 × 9
FCSG325	0.5	11 × 11
VFG256	0.8	14 × 14
FCSG536	0.5	16 × 16
VFG400	0.8	17 × 17
FCV(G)484	0.8	19 × 19
TQ(G)144	0.5	20 × 20
FG(G)484	1.0	23 × 23
VFG784	0.8	23 × 23
FG(G)676	1.0	27 × 27
FG(G)896	1.0	31 × 31
FC(G)1152	1.0	35 × 35

Notes:

- All the packages mentioned in this table are available both with lead and lead-free. Packages FCSG158 and VFG784 are available only in lead-free.
- (G) indicates that the package is RoHS 6/6-compliant (Pb-free).
- Automotive T2 grade devices are only available in the VFG256, VFG400, FG(G)484, and FG(G)676 packages.

The following table lists the I/Os per package. Cells that are highlighted in blue indicate that the device packages have vertical migration capability.

Table 1-3. I/Os per Package

Packages		M2S005 (S)	M2S010 (S/T/TS) ^{1,2}	M2S025 (T/TS) ¹	M2S050 (T/TS) ¹	M2S060 (T/TS) ¹	M2S090 (T/TS) ^{1, 1, 3}	M2S150 (T/TS) ⁵
FCSG158	I/Os	—	—	82	—	—	—	—
	Lanes	—	—	1	—	—	—	—
FCSG325	I/Os	—	—	180	200	200	180	—
	Lanes	—	—	2	2	2	4	—
VFG256	I/Os	161	138	138	—	—	—	—
	Lanes	—	2	2	—	—	—	—
FCSG536	I/Os	—	—	—	—	—	—	293
	Lanes	—	—	—	—	—	—	4
VFG400	I/Os	171	195	207	207	207	—	—
	Lanes	—	4	4	4	4	—	—
FCV(G)484	I/Os	—	—	—	—	—	—	248
	Lanes	—	—	—	—	—	—	4
TQ(G)144	I/Os	84	84	—	—	—	—	—
	Lanes	—	—	—	—	—	—	—
FG(G)484	I/Os	209	233	267	267	267	267	—
	Lanes	—	4	4	4	4	4	—

.....continued

Packages		M2S005 (S)	M2S010 (S/T/TS) ^{1,2}	M2S025 (T/TS) ¹	M2S050 (T/TS) ¹	M2S060 (T/TS) ¹	M2S090 (T/TS) ^{1, 1, 3}	M2S150 (T/TS) ⁵
FG(G)676	I/Os	—	—	—	—	387	425	—
	Lanes	—	—	—	—	4	4	—
VFG784	—	—	—	—	—	395	—	—
	—	—	—	—	—	4	—	—
FG(G)896	I/Os	—	—	—	377	—	—	—
	Lanes	—	—	—	8	—	—	—
FC(G)1152	I/Os	—	—	—	—	—	—	574
	Lanes	—	—	—	—	—	—	16

Notes:

1. Military temperatures 010, 025, 050, 060, and 090 are only available in the FG(G)484 package.
2. The M2S010S device is only available in the TQ(G)144 package.
3. The 090 FCSG325 package dimensions are 11 mm × 13.5 mm.
4. The M2S090 (T/TS) device in the FCSG325 package is available with an ordering code of XZ48. This ordering code pre-configures the device for Auto Update mode. Minimum order quantities apply. Contact your local Microchip sales office for details.
5. Military temperature 150 devices are only available in the FC(G)1152 package.

The following table lists features supported for various device-package combinations.

Table 1-4. Features per Device-Package Combination

Package	Devices	MDDR	FDDR	Crystal Oscillators	5G SerDes Lanes ¹	PCIe Endpoints	ULPI	UTMI	MSIO (3.3V Max.) ²	MSIOD (2.5V Max.) ³	DDRIO (2.5V Max.)	Total User I/Os
TQ(G)144	M2S005 (S)	—	—	2	—	—	1	1	52	9	23	84
	M2S010 (S)	—	—	2	—	—	1	1	50	11	23	84
FCSG158	M2S025T	—	—	1	1	1	1	1	70	12	0	82
VFG256	M2S005 (S)	—	—	2	—	—	1	1	119	12	30	161
	M2S010 (T/TS)	×18 ⁴	—	2	2	1	1	1	66	8	64	138
	M2S025 (T/TS)	×18 ⁴	—	2	2	1	1	1	66	8	64	138
FCSG325	M2S025 (T/TS)	×18 ⁴	—	2	2	1	1	1	94	22	64	180
	M2S050 (T/TS)	×18 ⁵	—	1	2	1	0	1	90	22	88	200
	M2S060 (T/TS)	×18 ⁴	—	2	2	2	1	1	114	22	64	200
	M2S090 (T/TS)	×18 ⁴	—	2	4	2	1	1	104	12	64	180
VFG400	M2S005 (S)	×18 ⁴	—	2			1	1	79	28	64	171
	M2S010 (T/TS)	×18 ⁴	—	2	4	1	1	1	99	32	64	195
	M2S025 (T/TS)	×18 ⁴	—	2	4	1	1	1	111	32	64	207
	M2S050 (T/TS)	×18 ⁵	—	1	4	1	0	1	87	32	88	207
	M2S060 (T/TS)	×18 ⁴	—	2	4	2	1	1	111	32	64	207
FCV(G)484	M2S150 (T/TS)	×18 ⁴	×18 ⁴	2	4	4 ⁶	1	1	91	34	123	273

.....continued

Package	Devices	MDDR	FDDR	Crystal Oscillators	5G SerDes Lanes ¹	PCIe Endpoints	ULPI	UTMI	MSIO (3.3V Max.) ²	MSIOD (2.5V Max.) ³	DDRIO (2.5V Max.)	Total User I/Os
FG(G)484	M2S005 (S)	×18 ⁴	—	2			1	1	115	28	66	209
	M2S010 (T/Ts)	×18 ⁴	—	2	4	1	1	1	123	40	70	233
	M2S025 (T/Ts)	×18 ⁴	—	2	4	1	1	1	157	40	70	267
	M2S050 (T/Ts)	×18 ⁵	—	1	4	1	0	1	105	40	122	267
	M2S060 (T/Ts)	×18 ⁴	—	2	4	2	1	1	157	40	70	267
	M2S090 (T/Ts)	×18 ⁴	—	2	4	2	1	1	157	40	70	267
FCSG536	M2S150 (T/Ts)	×18 ⁴	×18 ⁴	2	4	4 ⁷	1	1	151	16	126	293
FG(G)676	M2S060 (T/Ts)	×18 ⁴	—	2	4	2	1	1	271	40	76	387
	M2S090 (T/Ts)	×18 ⁴	—	2	4	2	1	1	309	40	76	425
VFG784	M2S060 (T/Ts)	×18 ⁴	—	2	4	2	1	1	279	40	76	395
FG(G)896 ⁷	M2S050 (T/Ts)	×36 ⁸	×36 ⁸	1	8	2	1	1	139	62	176	377
FC(G)1152	M2S150 (T/Ts)	×36 ⁹	×36 ⁹	2	16	4	1	1	292	106	176	574

Notes:

- Maximum SerDes rate for military temperature devices is 3.125 Gb/s.
- Number of differential MSIO is the number of MSIOs/2 for even and (number of MSIOs-1)/2 for odd MSIO. Supports LVDS 3.3/2.5 standard.
- Number of differential MSIOD is number of MSIODs/2 for even and (number of MSIODs-1)/2 for odd MSIOD. Supports only LVDS 2.5 standard.
- DDR supports ×18, ×16, ×9, and ×8 modes.
- DDR supports ×18 and ×16 modes.
- Four PCIe Gen1/Gen2 endpoints ×1 lane configuration.
- DDR3 is non-compliant. Call technical support for details.
- DDR supports ×36, ×32, ×18, and ×16 modes.
- DDR supports ×36, ×32, ×18, ×16, ×9, and ×8 modes.

The following table lists the programming interfaces supported for various device-package combinations.

Table 1-5. Programming Interfaces per Device-Package Combination

Package	Devices	JTAG	SPI_0	Flash_GOLDEN_N	System Controller SPI Port
TQ(G)144	M2S005 (S)	Yes	Yes	No	No
	M2S010 (S)	Yes	Yes	No	No
FCSG158	M2S025T	Yes	Yes	No	No
VFG256	M2S005 (S)	Yes	Yes	Yes	Yes
	M2S010 (T/Ts)	Yes	Yes	Yes	No
	M2S025 (T/Ts)	Yes	Yes	Yes	No
FCSG325	M2S025 (T/Ts)	Yes	Yes	No	No
	M2S050 (T/Ts)	Yes	Yes	No	No
	M2S060 (T/Ts)	Yes	Yes	No	No
	M2S090 (T/Ts)	Yes	Yes	No	No

.....continued

Package	Devices	JTAG	SPI_0	Flash_GOLDEN_N	System Controller SPI Port
VFG400	M2S005 (S)	Yes	Yes	Yes	Yes
	M2S010 (T/TS)	Yes	Yes	Yes	Yes
	M2S025 (T/TS)	Yes	Yes	Yes	Yes
	M2S050 (T/TS)	Yes	Yes	Yes	Yes
	M2S060 (T/TS)	Yes	Yes	Yes	Yes
FCV(G)484	M2S150 (T/TS)	Yes	Yes	Yes	Yes
FG(G)484	M2S005 (S)	Yes	Yes	Yes	Yes
	M2S010 (T/TS)	Yes	Yes	Yes	Yes
	M2S025 (T/TS)	Yes	Yes	Yes	Yes
	M2S050 (T/TS)	Yes	Yes	Yes	Yes
	M2S060 (T/TS)	Yes	Yes	Yes	Yes
	M2S090 (T/TS)	Yes	Yes	Yes	Yes
FCSG536	M2S150 (T/TS)	Yes	Yes	Yes	Yes
FG(G)676	M2S060 (T/TS)	Yes	Yes	Yes	Yes
	M2S090 (T/TS)	Yes	Yes	Yes	Yes
VFG 784	M2S060 (T/TS)	Yes	Yes	Yes	Yes
FG(G)896	M2S050 (T/TS)	Yes	No	Yes	Yes
FC(G)1152	M2S150 (T/TS)	Yes	Yes	Yes	Yes

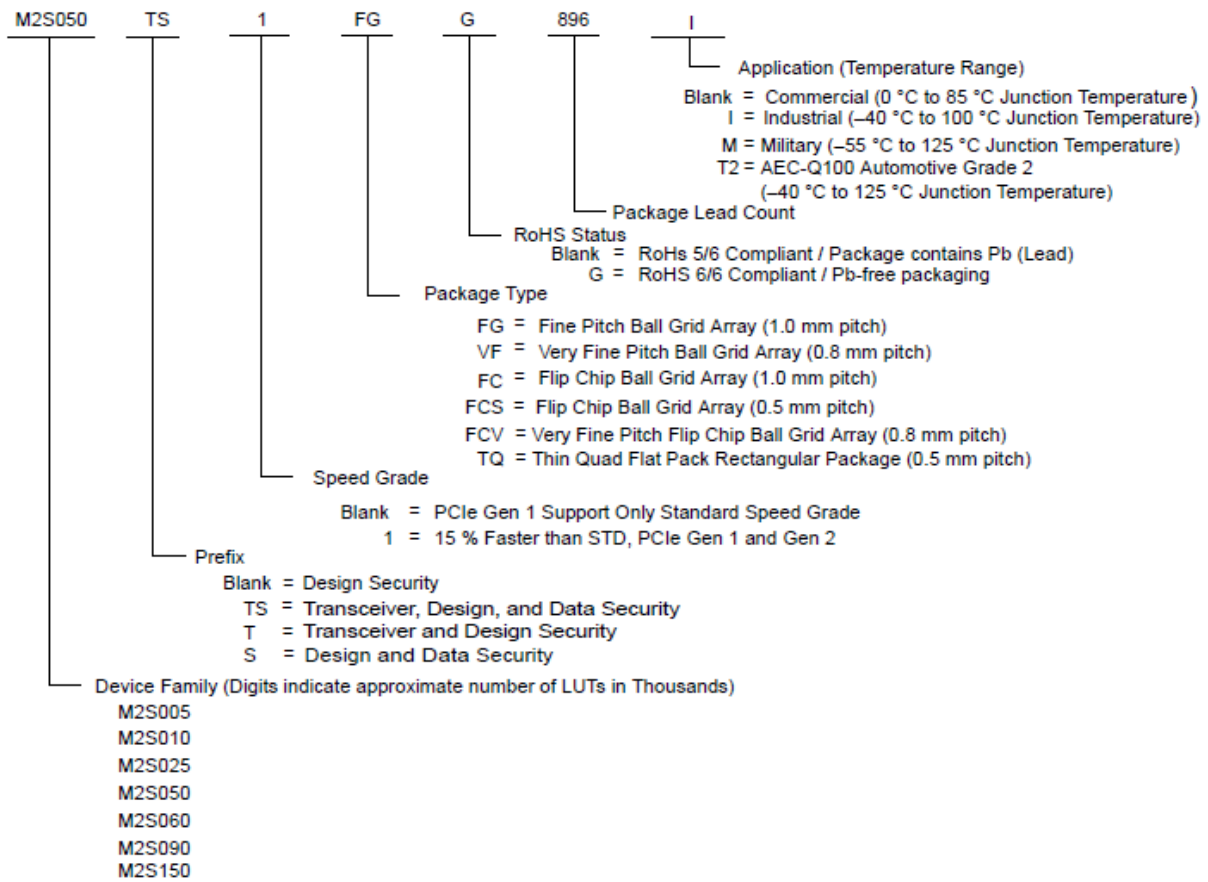
The following table lists the resources required for various programming modes.

Table 1-6. Resources Required per Programming Mode

Programming Mode	JTAG	SPI_0	Flash_GOLDEN_N	System Controller SPI Port
External FlashPro4/5	Yes	No	No	No
External uP – JTAG client	Yes	No	No	No
External uP – SPI client	No	No	No	Yes
Auto programming	No	Yes	Yes	No
Two-step IAP	No	Yes	No	No
Programming recovery	No	Yes	No	No

1.4 Ordering Information

Each SmartFusion 2 device model has a unique part number, which is used for ordering the device. The part number consists of various elements, each providing additional information about the device. Using the M2S050 device as an example, the following figure shows the significance of each element in the part number.

Figure 1-2. Elements in a Part Number**Notes:**

- M2S005 devices do not support transceivers and are not available in the military temperature grade.
- Automotive grade devices are available with S and TS prefixes.

1.5 Temperature Grades

This section describes the SmartFusion 2 SoC devices available in commercial, industrial, and military temperature grades.

1.5.1 SmartFusion 2 Commercial and Industrial Temperature Grade Devices

The following table indicates transceiver and data security support in SmartFusion 2 C and I temperature grade devices. The following feature codes are used in the table:

- T—indicates that a transceiver-only version is available for the device
- S—indicates that a data security-only version is available for the device
- TS—indicates that a version with both transceiver and data security is available for the device

Depending on the features desired, the associated feature code (T, S, or TS) is included after the device name and before the package name in the device part number. All the devices can also be ordered without transceiver and data security. In this case, no feature code is included in the part number. For example, the following are the part numbers for an M2S025 device in an FCSG325 package:

- With transceiver only: M2S025TFCSG325

- With both transceiver and data security: M2S025TSFCSG325
- Without both transceiver and data security: M2S025FCSG325

Table 1-7. Transceiver and Data Security Support in SmartFusion 2 Devices

M2S	FCSG158	FCSG325	VFG256	FCSG536	VFG400	FCV(G)484	TQ(G)144	FG(G)484	FG(G)676	VFG784	FG(G)896	FC(G)1152
005	—	—	S	—	S	—	S	S	—	—	—	—
010	—	—	T, TS	—	T, TS	—	S	T, TS	—	—	—	—
025	T	T, TS	T, TS	—	T, TS	—	—	T, TS	—	—	—	—
050	—	T, TS	—	—	T, TS	—	—	T, TS	—	—	T, TS	—
060	—	T, TS	—	—	T, TS	—	—	T, TS	T, TS	T, TS	—	—
090	—	T, TS	—	—	—	—	—	T, TS	T, TS	—	—	—
150	—	—	—	T, TS	—	T, TS	—	—	—	—	—	T, TS

1.5.2 SmartFusion 2 Military Temperature Grade Devices

The following are the SmartFusion 2 military temperature grade devices:

- M2S010 (T/TS)-1FG(G)484M
- M2S025 (T/TS)-1FG(G)484M
- M2S050 (T/TS)-1FG(G)484M
- M2S060 (T/TS)-1FG(G)484M
- M2S090 (T/TS)-1FG(G)484M
- M2S150 (T/TS)-1FC(G)1152M
- M2S150 (T/TS)-1FCV484M

Note: Gold wire bonds are available for the FG484 package. To order a package with gold wire bonds, append X399 to the part number when placing the order. For example, M2S090 (T/TS)-1FG484MX399).

1.6 SmartFusion 2 Device Status

For device status, see [IGLOO2](#) and [SmartFusion2 Datasheet](#).

1.7 SmartFusion 2 Datasheet and Pin Descriptions


The following documents contain detailed specifications and pin descriptions for SmartFusion 2 SoC FPGAs:

- [IGLOO2 and SmartFusion2 Datasheet](#)
- [SmartFusion2 and IGLOO2 Automotive Grade 2 Datasheet](#)
- [Automotive Grade 2 SmartFusion2 SoC FPGAs Product Brief](#)
- [SmartFusion2 Pin Descriptions Datasheet](#)

1.8 Marking Specifications

Microchip normally topside-marks the part number on every SmartFusion 2 device along with other device specifications, as shown in the following figure.

Figure 1-3. Marking Specifications

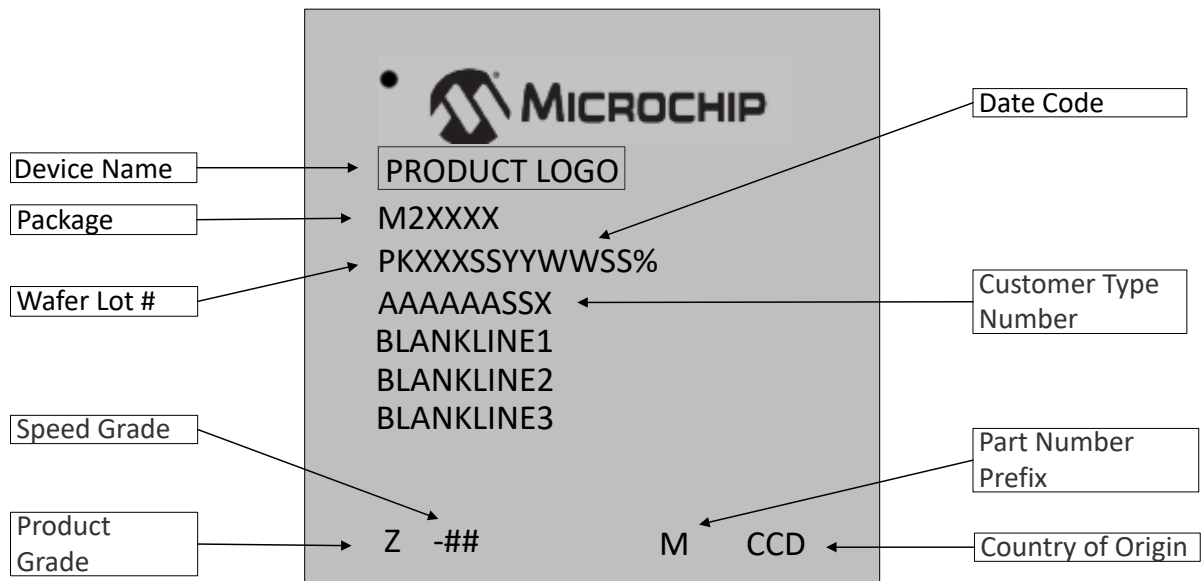

1.8.1 Description

- Device Name (M2XXXX): M2S for SmartFusion 2 Devices
 - Example: M2S050TS
- Package (PK###): Available package, assigned as follows:
 - PK: Package code¹:
 - FG(G): Fine Pitch BGA, 1.00 mm pitch
 - FC(G): Flip Chip Fine Pitch BGA with Metal LID on top, 1.00 mm pitch
 - FCV(G): Flip Chip Very Fine Pitch BGA with Metal LID on top, 0.8 mm pitch
 - FCS(G): Flip Chip Ultra Fine Pitch BGA with Metal LID on top, 0.5 mm pitch
 - VF(G): Very Fine Pitch BGA, 0.8 mm pitch
 - TQ(G): Ultra Fine Pitch Thin Quad Flat Pack Package, 0.5 mm pitch
 - ###: Number of Pins: Can be three or four digits. For example, 144, 256, or 1152
- Wafer lot (AAAAAASSX): Microchip wafer lot number
 - AAAAAA: Wafer lot number
 - X: One digit die revision code
 - SS: Two blank spaces
- Speed grade (-##): Speed Binning Number
 - Blank: Standard speed grade
 - -1: -1 speed grade
- Product grade (Z): Product Grade; assigned as follows:
 - Blank/C: Commercial


¹ All the packages mentioned above are available both with lead and lead-free. (G) indicates that the package is RoHS 6/6-compliant (Pb-free).

- ES: Engineering Samples
 - I: Industrial
 - M: Military Temperature
 - PP: Pre Production
 - T2: AEC-Q100 Automotive Grade 2
- Date code (YYWWSS%): Assembly Date Code
 - YY: Last two digits for seal year
 - WW: Work week the part was sealed
 - SS: Two blank spaces
 - %: Can be digital number or character for new product
- Customer type number: As specified on the lot traveler
 - GW: Gold Wire bond
- Part number prefix: Part number prefix, assigned as follows:
 - Blank: Design security
 - T: Transceivers and design security
 - S: Design and data security
 - TS: Transceiver, design, and data security
- Country of origin (CCD): Assembly house country code
 - China: CHN
 - Hong Kong: HKG
 - Japan: JPN
 - Korea, South: KOR
 - Philippines: PHL
 - Taiwan: TWN
 - Singapore: SGP
 - United States: USA
 - Malaysia: MYS

2. SmartFusion 2 SoC FPGA Feature Description

The following figure shows the SmartFusion 2 SoC FPGA chip layout with various components of the FPGA.

Figure 2-1. SmartFusion 2 SoC FPGA Chip Layout

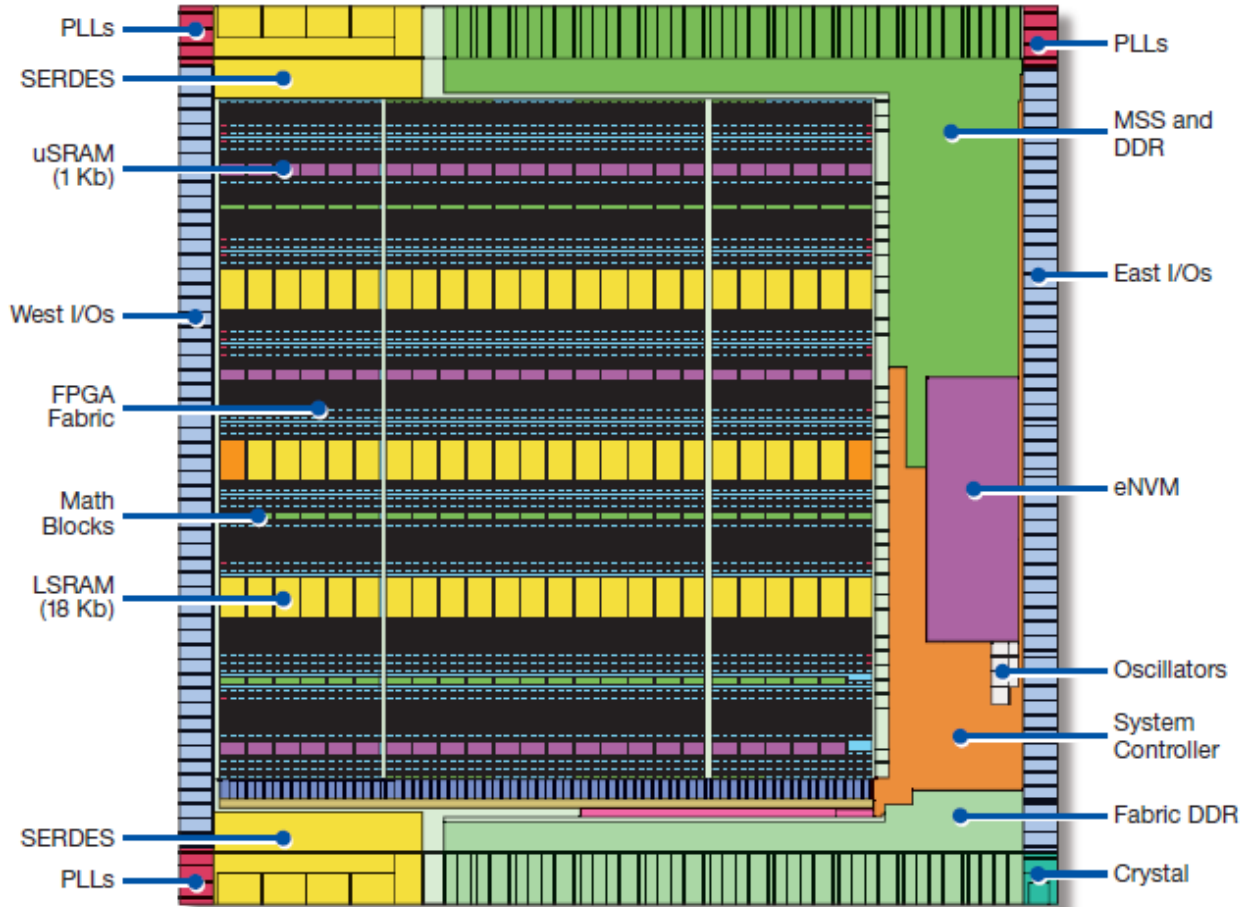

The following sections provide detailed information about the security, reliability, power, and performance features supported by SmartFusion 2 SoC FPGAs. Reliability

SmartFusion 2 flash-based fabric has zero FIT configuration rate due to its SEU immunity, which is critical in reliability applications. The flash fabric also has the advantage that no external configuration memory is required, making the device instant-on; it retains configuration when powered off. To complement this unique FPGA capability, SmartFusion 2 devices add reliability to many other aspects of the device. SECEDED protection is implemented on the Cortex-M3 embedded scratch pad memory, Ethernet, CAN, and USB buffers, and is optional on the DDR memory controllers. This means that if a one-bit error is detected, the error is corrected automatically. If errors of more than one bit are detected, they are not corrected. SECEDED error signals are brought to the FPGA fabric to allow the user to monitor the status of these protected internal memories. Other areas of the architecture are implemented with latches, which are more resistant to SEUs. Therefore, no correction is needed in DDR bridges (MSS, MDDR, and FDDR), instruction cache and MMUART, SPI, and PCIe FIFOs.

2.1 Highest Security Devices

Building further on the intrinsic security benefits of flash nonvolatile memory technology, the SmartFusion 2 family incorporates all the legacy security features that made the original SmartFusion[®], Fusion[®], IGLOO[®], and ProASIC[®]3 third-generation flash FPGAs and cSoCs the gold standard for secure devices in the PLD industry. In addition, the fourth-generation flash-based SmartFusion 2 SoC FPGAs add many unique design security features, data security features, and use models new to the PLD industry.

2.1.1 Design Security vs. Data Security

When classifying the security attributes of PLDs, a useful distinction is made between design security and data security.

2.1.2 Design Security

Design security protects the intent of the owner of the design such as keeping the design and associated bitstream keys confidential, preventing design changes (for example, insertion of Trojan Horses), and controlling the number of copies made throughout the device life cycle. Design security may also be known as IP protection. It is one aspect of AT protection. Design security applies to the device from initial production, includes any updates such as in-the-field upgrades, and can include decommissioning of the device at the end of its life, if desired. Good design security is a prerequisite for good data security.

The following table lists the design security features supported in various SmartFusion 2 devices. Blank cells indicate that the feature is not supported.

Table 2-1. Design Security Features

Feature	M2S005, M2S010, M2S025, and M2S050	M2S060, M2S090, and M2S150
Software Memory Protection Unit (MPU)	Yes	Yes
FlashLock [®] passcode security (256-bit)	Yes	Yes
Flexible security settings using flash lock-bits	Yes	Yes
Encrypted/authenticated design key loading	Yes	Yes
Symmetric key design security (256-bit)	Yes	Yes
Design key verification protocol	Yes	Yes
Encrypted/authenticated configuration loading	Yes	Yes
Certificate-of-Conformance (C-of-C)	Yes	Yes
Back-tracking prevention (also known as Versioning)	Yes	Yes
Device certificate(s) (anti-counterfeiting)	Yes	Yes
Support for configuration variations	Yes	Yes
Fabric NVM and eNVM integrity tests	Yes	Yes
Information services (S/N, Cert., USERCODE, and others)	Yes	Yes
Tamper detection	Yes	Yes
Tamper response (includes Zeroization)	Yes	Yes
ECC public key design security (384-bit)	—	Yes
Hardware intrinsic design key (SRAM-PUF)	—	Yes

2.1.3 Data Security

Data security is protecting the information the FPGA is storing, processing, or communicating in its role in the end application. If, for example, the configured design is implementing the key management and encryption portion of a secure military radio, data security could entail encrypting and authenticating the radio traffic, and protecting the associated application-level cryptographic keys. Data security is closely related to the terms Information Assurance (IA) and information security. All SmartFusion 2 devices incorporate enhanced design security, making them the most

secure programmable logic devices ever made. Select SmartFusion 2 models also include an advanced set of on-chip data security features that make designing secure information assurance applications easier and better than ever before.

The following table lists the data security features supported in various SmartFusion 2 devices. Blank cells indicate that the feature is not supported.

Table 2-2. Data Security Features

Feature	M2S005S, M2S010S, M2S010TS, M2S025TS, and M2S050TS	M2S060TS, M2S090TS, and M2S150TS
CRI pass-through DPA patent license	Yes	Yes
Hardware firewalls protecting access to memories	Yes	Yes
Non-deterministic random bit generator service	Yes	Yes
AES-128/256 service (ECB, OFB, CTR, CBC modes)	Yes	Yes
SHA-256 service	Yes	Yes
HMAC-SHA-256 service	Yes	Yes
Key tree service	Yes	Yes
PUF emulation (Pseudo-PUF)	Yes	
PUF emulation (SRAM-PUF)	—	Yes
ECC point-multiplication service	—	Yes
ECC point-addition service	—	Yes
User SRAM-PUF enrollment service	—	Yes
User SRAM-PUF activation code export service	—	Yes
SRAM-PUF intrinsic key generation and enrollment service	—	Yes
SRAM-PUF key importance and enrollment service	—	Yes
SRAM-PUF key regeneration service	—	Yes

2.2 Low Power

Microchip's flash-based FPGA fabric results in extremely low-power design implementation with static power as low as 7.5 mW for 6,060 LE devices. Flash*Freeze technology provides an ultra-low power static mode (Flash*Freeze mode) for SmartFusion 2 devices with power less than 11 mW for the largest device that contains 146,124 logic elements. Flash*Freeze mode entry retains all the SRAM and register information, and the exit from Flash*Freeze mode achieves rapid recovery to active mode.

2.3 High-Performance FPGA Fabric

Built on 65 nm process technology, the SmartFusion 2 SoC FPGA fabric is composed of four building blocks such as the logic module, the large SRAM, the micro SRAM, and the mathblock. The logic module is the basic logic element and has advanced features:

- A fully permutable 4-input LUT optimized for lowest power
- A dedicated carry chain based on carry look-ahead technique
- A separate flip-flop which can be used independently from the LUT

The 4-input LUT can be configured either to implement any 4-input combinatorial function or to implement an arithmetic function where the LUT output is XORed with carry input to generate the sum output.

2.3.1 Dual-Port Large SRAM

Large SRAM (LSRAM) (RAM1Kx18) is targeted for storing large memory for use with various operations. Each LSRAM block can store up to 18,432 bits. Each RAM1Kx18 block contains two independent data ports such as Port A and Port B. LSRAM is synchronous for both read and write

operations. Operations are triggered on the rising edge of the clock. The data output ports of the LSRAM have pipeline registers which have control signals that are independent of the SRAM's control signals.

2.3.2 Three-Port Micro SRAM

μ SRAM (RAM64x18) is the second type of SRAM, which is embedded in the fabric of SmartFusion 2 devices. RAM64x18 uSRAM is a 3-port SRAM; Port A and Port B are used as read ports and Port C is used as write port. The two read ports are independent of each other and can perform read operations in both synchronous and asynchronous modes. The write port is always synchronous. The uSRAM block is approximately 1 KB (1,152 bits) in size. These uSRAM blocks are primarily targeted for building embedded FIFOs to be used by any embedded fabric masters.

2.3.3 Math blocks for DSP Applications

The fundamental building block in any digital signal processing algorithm is the MACC function. SmartFusion 2 SoC FPGAs implement a custom 18 x 18 MACC block for efficient implementation of complex DSP algorithms such as Finite Impulse Response (FIR) filters, Infinite Impulse Response (IIR) filters, and Fast Fourier Transform (FFT) for filtering and image processing applications.

Each math block has the following capabilities:

- Supports 18 x 18 signed multiplications natively ($A[17:0] \times B[17:0]$)
 - Supports dot product; the multiplier computes:
 - $(A[8:0] \times B[17:9] + A[17:9] \times B[8:0]) \times 2^9$
 - Built-in addition, subtraction, and accumulation units to combine multiplication results efficiently
- In addition to the basic MACC function, DSP algorithms typically need small amounts of RAM for coefficients and larger RAMs for data storage. SmartFusion 2 micro RAMs are ideally suited to serve the needs of coefficient storage while the large RAMs are used for data storage.

2.4 Microcontroller Subsystem

The microcontroller subsystem (MSS) contains a high-performance integrated Cortex-M3 processor, running at up to 166 MHz. The MSS contains an 8 Kbyte instruction cache to provide low latency access to internal eNVM and external DDR memory. The MSS provides multiple interface options to the FPGA fabric in order to facilitate tight integration between the MSS and user logic in the fabric.

2.4.1 Arm Cortex-M3 Processor

The MSS uses the latest revision (r2p1) of the Arm Cortex-M3 processor. Microchip's implementation includes the optional Embedded Trace Macrocell (ETM) features for easier development and debug and the Memory Protection Unit (MPU) for real-time operating system support.

2.4.2 Cache Controller

To minimize latency for instruction fetches when executing firmware out of off-chip DDR or on-chip eNVM, an 8 KB, 4-way set associative instruction cache is implemented. This provides zero wait state access for cache hits and is shared by both I and D code buses of the Cortex-M3 processor. In the event of cache misses, cache lines are filled, replacing existing cache entries based on a Least Recently Used (LRU) algorithm.

There is a configurable option available to operate the cache in a locked mode, whereby a fixed segment of code from either the DDR or eNVM is copied into the cache and locked there, so that it is not replaced when cache misses occur. This is used for performance-critical code.

It is also possible to disable the cache altogether, which is desirable in systems requiring very deterministic execution times.

The cache is implemented with SEU tolerant latches.

2.4.3 DDR Bridge

The DDR bridge is a data bridge between four AHB bus hosts and a single AXI bus client. The DDR bridge accumulates AHB writes into write combining buffers prior to bursting out to external DDR memory. The DDR bridge also includes read combining buffers, allowing AHB hosts to efficiently read data from the external DDR memory from a local buffer. The DDR bridge optimizes reads and writes from multiple hosts to a single external DDR memory. Data coherency rules between the four hosts and the external DDR memory are implemented in hardware. The DDR bridge contains three write combining/read buffers and one read buffer. All buffers within the DDR bridge are implemented with SEU tolerant latches and are not subject to the SEUs that SRAM exhibits. SmartFusion 2 devices implement three DDR bridges in the MSS, FDDR, and MDDR subsystems.

2.4.4 AHB Bus Matrix

The AHB Bus Matrix (ABM) is a non-blocking, AHB-Lite multi-layer switch, supporting 10 Host interfaces and 7 Client interfaces. The switch decodes access attempts by hosts to various clients, according to the memory map and security configurations. When multiple hosts are attempting to access a client simultaneously, an arbiter associated with that client decides which host gains access, according to a configurable set of arbitration rules. These rules can be configured by the user to provide different usage patterns to each client. For example, many consecutive access opportunities to the client can be allocated to one particular host, to increase the likelihood of same type accesses (all reads or all writes), which makes more efficient usage of the bandwidth to the client.

2.4.5 System Registers

The MSS system registers are implemented as an AHB client on the AHB bus matrix. This means that the Cortex-M3 processor or a soft host in the FPGA fabric might access the registers and therefore, control the MSS. The system registers can be initialized by user-defined flash configuration bits on power-up. Each register also has a flash bit to enable write protecting the contents of the registers. This allows the MSS system configuration to be reliably fixed for a given application.

2.4.6 Fabric Interface Controller

The Fabric Interface Controller (FIC) block provides two separate interfaces between the MSS and the FPGA fabric such as the MSS Master (MM) and fabric Master (FM). Each of these interfaces can be configured to operate as AHB-Lite or APB3. Depending on device density, there are up to two FIC blocks (FIC_0 and FIC_1) present in the MSS.

2.4.7 Embedded SRAM

The MSS contains two blocks of 32 KB embedded SRAM (eSRAM), giving a total of 64 KB. Having the eSRAM arranged as two separate blocks allows the user to take advantage of the Harvard architecture of the Cortex-M3 processor. For example, code can be located in one eSRAM, while data, such as the stack, can be located in the other.

The eSRAM is designed for SECDED protection. When SECDED is disabled, SRAM that usually stores SECDED data, might be reused as an extra 16 KB of eSRAM.

2.4.8 Embedded NVM

The MSS contains up to 512 KB of embedded NVM (eNVM) (64 bits wide). Accesses to the eNVM from the Cortex-M3 processor are cacheable.

2.4.9 DMA Engines

Two DMA engines are present in the MSS such as high-performance DMA and peripheral DMA.

2.4.9.1 High-Performance DMA

The High-Performance DMA (HPDMA) engine provides efficient memory to memory data transfers between an external DDR memory and internal eSRAM. This engine has two separate AHB-Lite interfaces—one to the MDDR bridge and the other to the AHB bus matrix. All transfers by the HPDMA are full word transfers.

2.4.9.2 Peripheral DMA

The Peripheral DMA (PDMA) engine is tuned for offloading byte-intensive operations, involving MSS peripherals, to and from the internal eSRAMs. Data transfers can also be targeted to user logic/RAM in the FPGA fabric.

2.4.10 APB Configuration Bus

Each SmartFusion 2 device has an APB configuration bus that allow the user to initialize the SerDes ASIC blocks, the fabric DDR memory controller, and user instantiated peripherals in the FPGA fabric.

2.4.11 Peripherals

A large number of communications and general purpose peripherals are implemented in the MSS.

2.4.11.1 USB Controller

The MSS contains a high speed USB 2.0 on-the-go (OTG) controller with the following features:

- Operates either as the function controller of a high-speed / full-speed USB peripheral or as the host/peripheral in point-to-point or multi-point communications with other USB functions.
- Complies with the USB 2.0 standard for high-speed functions and with the On-The-Go supplement to the USB 2.0 specification.
- Supports OTG communications with one or more high-speed, full-speed, or low-speed devices.

2.4.11.2 Triple Speed Ethernet MAC

The Triple Speed Ethernet (TSE) MAC supports IEEE® 802.3 10/100/1000 Mb/s Ethernet operation. The following PHY interfaces are directly supported by the MAC:

- GMII
- MII
- TBI

The Ethernet MAC hardware implements the following functions:

- 4 KB internal transmit FIFO and 8 KB internal receive FIFO
- IEEE 802.3X full-duplex flow control
- DMA of Ethernet frames between internal FIFOs and system memory (such as eSRAM or DDR)
- Cut-through operation
- SECDED protection on internal buffers

2.4.11.3 SGMII PHY Interface

SGMII mode is implemented by means of configuring the MAC for 10-Bit Interface (TBI) operation, allocating one of the high-speed serial channels to SGMII, and by implementing custom logic in the fabric.

2.4.11.4 10 Gbps Ethernet

Support for 10 Gbps Ethernet is achieved by programming the SerDes interface to XAUI mode. In this mode, a soft 10G EMAC with XGMII interface can be directly connected to the SerDes interface.

2.4.11.5 Communication Block

The communication block (COMM_BLK) provides a UART-like communications channel between the MSS and the system controller. System services are initiated through the COMM_BLK.

2.4.11.6 Serial Peripheral Interface

The Serial Peripheral Interface (SPI) controller is compliant with the Motorola SPI, Texas Instruments synchronous serial, and National Semiconductor MICROWIRE formats. In addition, the SPI supports interfacing to large SPI flash and EEPROM devices by way of the Client protocol engine. The SPI controller supports both Host and Client modes of operation.

The SPI controller embeds two 4 x 32 (depth x width) FIFOs for receive (Rx) and transmit (Tx) data. These FIFOs are accessible through Rx data and Tx data registers. Writing to the Tx data register causes the data to be written to the transmit FIFO. This is emptied by transmit logic. Similarly, reading from the Rx data register causes data to be read from the receive FIFO.

2.4.11.7 Multi-Mode UART

SmartFusion 2 devices contain two identical Multi-Mode Universal Asynchronous/Synchronous Receiver/Transmitter (MMUART) peripherals that provide software compatibility with the popular 16550 device. They perform serial-to-parallel conversion on data originating from modems or other serial devices, and perform parallel-to-serial conversion on data from the Cortex-M3 processor to these devices. The following are the main supporting features:

- Fractional baud rate capability
- Asynchronous and synchronous operation
- Full programmable serial interface characteristics
 - Data width is programmable to 5, 6, 7, or 8 bits
 - Even, odd, or no-parity bit generation/detection
 - 1, 1½, and 2 stop bit generation
- 9-bit address flag capability used for multidrop addressing topologies

2.4.11.8 I²C

SmartFusion 2 devices contain two identical Host/Client I²C peripherals that perform serial-to-parallel conversion on data originating from serial devices, and perform parallel-to-serial conversion on data from the Arm Cortex-M3 processor, or any other bus host, to these devices. The following are the main features supported:

- I²C v2.1
 - 100 Kbps
 - 400 Kbps
- Dual-client addressing
- SMBus v2.0
- PMBus v1.1

2.5 Clock Sources

SmartFusion 2 devices have two on-chip RC oscillators—a 1 MHz RC oscillator and a 50 MHz RC oscillator—and up to two main crystal oscillators (32 kHz–20 MHz). These are available to the user for generating clocks to the on-chip resources and the logic built on the FPGA fabric array. The second crystal oscillator available on the SmartFusion 2 devices is dedicated for RTC clocking. These oscillators (except the RTC crystal oscillator) can be used in conjunction with the integrated user phase-locked loops (PLLs) and fabric clock conditioning circuits (FAB_CCC) to generate clocks of varying frequency and phase. In addition to being available to the user, these oscillators are also used by the system controller, power-on reset circuitry, MSS during Flash*Freeze mode, and the RTC.

SmartFusion 2 devices have up to eight fabric CCC (FAB_CCC) blocks and a dedicated PLL associated with each CCC to provide flexible clocking to the FPGA fabric portion of the device. The user has the freedom to use any of the eight PLLs and CCCs to generate the fabric clocks and the internal MSS clock from the base fabric clock (CLK_BASE). There is also a dedicated CCC block for the MSS (MSS_CCC) and an associated PLL (MPLL) for MSS clocking and de-skewing the CLK_BASE clock. The fabric alignment clock controller (FACC), part of the MSS CCC, is responsible for generating various aligned clocks required by the MSS for correct operation of the MSS blocks and synchronous communication with the user logic in the FPGA fabric.

2.6 High-Speed Serial Interfaces

2.6.1 SerDes

SmartFusion 2 has up to four 5-Gbps SerDes transceivers, each supporting four SerDes lanes.

The native EPCS SerDes interface facilitates the implementation of SRIO in the fabric or an SGMII interface for the Ethernet MAC in the MSS. In EPCS mode, the transceiver runs at a maximum rate of 3.2 Gbps.

2.6.2 PCI Express

PCI express (PCIe) is a high speed, packet-based, point-to-point, low pin count, and serial interconnect bus. The SmartFusion 2 family has two hard high-speed serial interface blocks. Each SerDes block contains a PCIe system block. The PCIe system is connected to the SerDes block and following are the main features supported:

- Supports $\times 1$, $\times 2$, and $\times 4$ lane configuration
- Endpoint configuration only
- PCI Express Base Specification Revision 2.0
- 2.5 Gbps and 5.0 Gbps compliant
- Embedded receive (2 KB), transmit (1 KB) and retry (1 KB) buffer dual-port RAM implementation
- Maximum payload size of up to 256 bytes
- 64-bit AXI or 32-bit AHB-Lite Host and Client interfaces to the application layer
- 32-bit APB interface to access configuration and status registers of PCIe system
- Up to 3×64 bit base address registers
- 1 virtual channel (VC)

2.6.3 XAUI/XGXS

The XAUI/XGXS extension allows the user to implement a 10 Gbps (XGMII) Ethernet PHY interface by connecting the Ethernet MAC fabric interface through an appropriate soft IP block in the fabric.

2.7 High-Speed Memory Interfaces: DDRx Memory Controllers

There are up to three DDR subsystems, MDDR (MSS DDR), and FDDR (fabric DDR) present in SmartFusion 2 devices. Each subsystem consists of a DDR controller, PHY, and a wrapper. The MDDR has an interface from the MSS and fabric, and FDDR provides an interface from the fabric.

The following are the main features supported by the FDDR and MDDR:

- Support for LPDDR, DDR2, and DDR3 memories
- Simplified DDR command interface to standard AMBA AXI/AHB interface
- Up to 667 Mbps (333 MHz double data rate) performance
- Supports 1, 2, or 4 ranks of memory
- Supports different DRAM bus width modes: x8, x9, x16, x18, x32, and x36
- Supports DRAM burst length of 2, 4, or 8 in full bus-width mode; supports DRAM burst length of 2, 4, 8, or 16 in half bus-width mode
- Supports memory densities up to 4 GB
- Supports a maximum of 8 memory banks
- SECDED enable/disable feature
- Embedded physical interface (PHY)
- Read and Write buffers in fully associative CAMs, configurable in powers of 2, up to 64 Reads plus 64 Writes

- Support for dynamically changing clock frequency while in self-refresh
- Supports command reordering to optimize memory efficiency
- Supports data reordering, returning critical word first for each command

2.7.1 MDDR Subsystem

The MDDR subsystem has two interfaces to the DDR. One is an AXI 64-bit bus from the DDR bridge within the MSS. The other is a multiplexed interface from the FPGA fabric, which can be configured as either a single AXI 64-bit bus or two 32-bit AHB-Lite buses. There is also a 16-bit APB configuration bus, which is used to initialize the majority of the internal registers within the MDDR subsystem after reset. This APB configuration bus can be mastered by the MSS directly or by a host in the FPGA fabric. Support for 3.3V Single Data Rate DRAMs (SDRAM) can be obtained by using the SMC_FIC interface in the MDDR subsystem. Users would then instantiate a soft AHB or AXI SDRAM memory controller in the FPGA fabric and connect I/O ports to 3.3V MSIO.

2.7.2 FDDR Subsystem

The FDDR subsystem has one interface to the DDR. This is a multiplexed interface from the FPGA fabric, which can be configured as either a single AXI 64-bit bus or two 32-bit AHB-Lite buses. There is also a 16-bit APB configuration bus, which is used to initialize the majority of the internal registers within the FDDR subsystem after reset. This APB configuration bus can be mastered by the MSS or a host in the FPGA fabric.

2.8 SmartFusion 2 Development Tools

This section describes the SmartFusion 2 SoC FPGA development tools.

2.8.1 Design Software

Microchip's Libero[®] SoC is a comprehensive software toolset to design applications using the SmartFusion 2 device. Libero SoC manages the entire design flow from design entry, synthesis and simulation, place and route, timing and power analysis, with enhanced integration of the embedded design flow. System designers can leverage the easy-to-use Libero SoC that includes the following features:

- System Builder for creation of system-level architecture
- Synthesis, DSP, and debug support from Synopsys
- Simulation from mentor graphics
- Push-button design flow with power analysis and timing analysis
- SmartDebug for access to non-invasive probes within the SmartFusion 2 devices
- Integrated firmware flows for SoftConsole (GNU/Eclipse), IAR, and Keil
- Operating system support includes uClinux from Emcraft Systems, FreeRTOS, SAFERTOS and uc/OS-III from Micrium

See the [Libero SoC Design Suite](#) web page for more information about Libero.

2.8.2 Design Hardware


Several SmartFusion 2 kits are available for quick evaluation of the device features and prototyping. The demo designs ensure faster learning for the users. See [SmartFusion2 Kits](#) web page for more information about various kits available in SmartFusion 2. Following are the various SmartFusion 2 kits and their board images.

SmartFusion 2 Security Evaluation Kit

The SmartFusion 2 Security Evaluation Kit is a low cost platform to evaluate the security, low-power consumption, reliability, and high integration capabilities of the SmartFusion 2 device. This kit has a 90K LE device that allows a larger system to be implemented on the kit. The board contains 512 Mb

LPDDR, 64 Mb SPI flash, X1 PCIe Edge connector, 4-SMA connectors, 10/100/1000 Ethernet and GPIO connector.


Figure 2-2. SmartFusion 2 Security Evaluation Kit

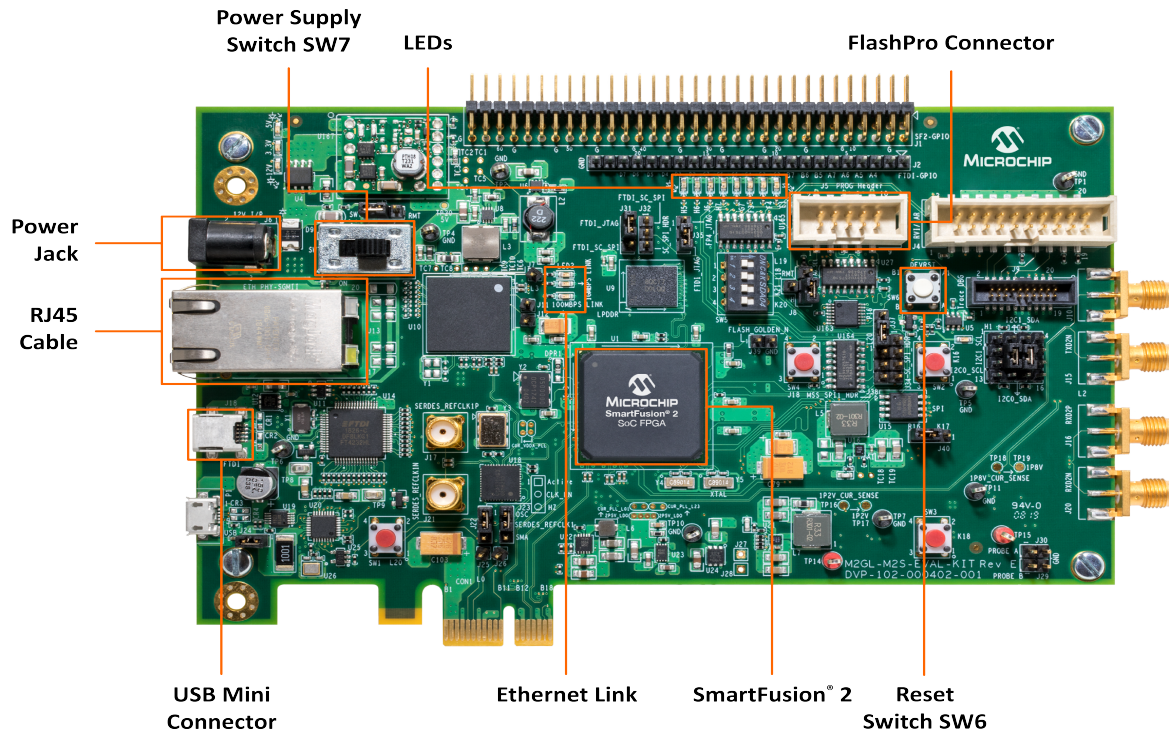

SmartFusion 2 Advanced Development Kit

The SmartFusion 2 Advanced Development Kit offers a full featured 150K LE device. This kit has several standards and advanced peripherals such as PCIe x4 edge connector, two FMC connectors for using several off the shelf daughter cards, USB, Philips I²C, two Gigabit Ethernet ports, SPI, and UART. A high precision operational amplifier circuitry on the board measures the core power consumed by the device. The kit has 1 GB of on-board DDR3 memory and 2 GB of SPI flash.


Figure 2-3. SmartFusion 2 Advanced Development Kit

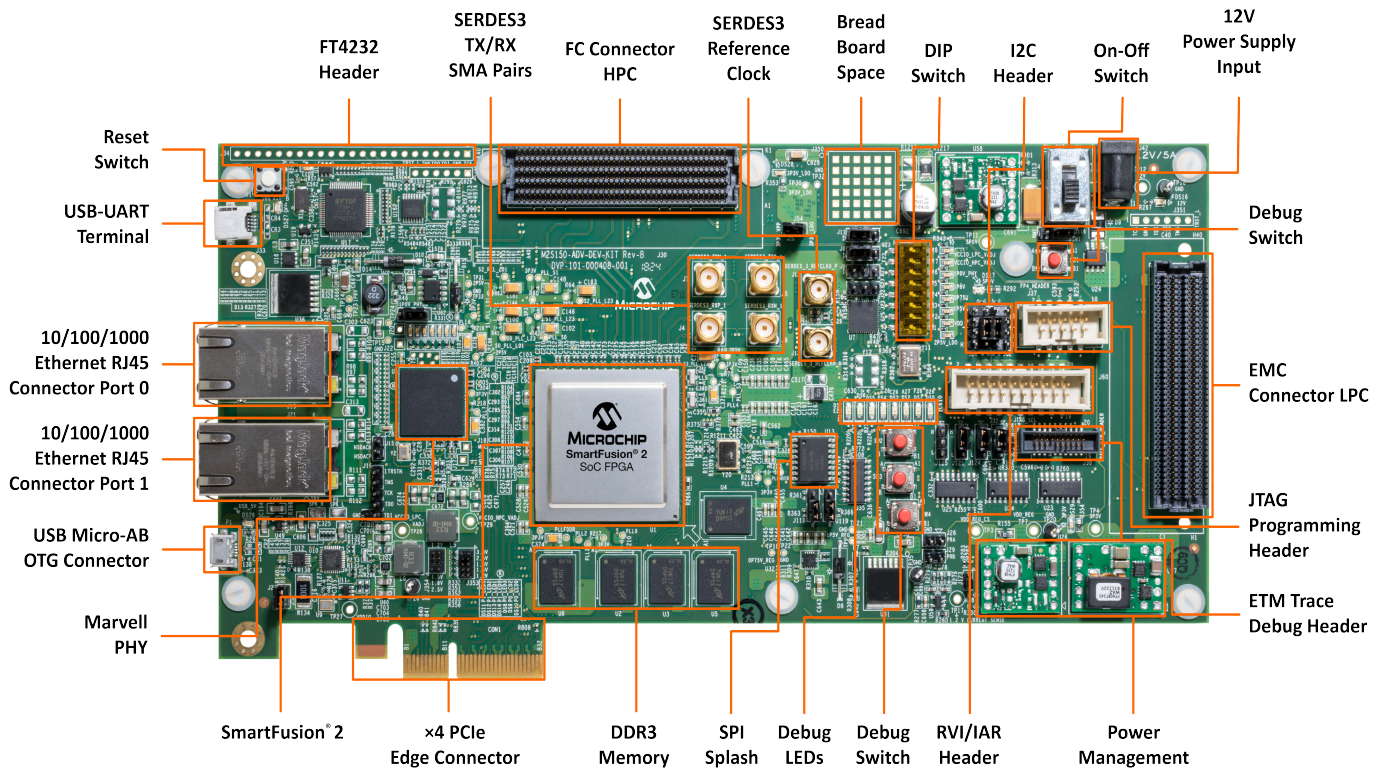

SmartFusion 2 Dual-axis Motor Control Starter Kit

Microchip SmartFusion 2 dual-axis deterministic starter kit gives designers a great starting point for evaluating time-saving proven motor control reference designs. This kit is supplied with hardware and software IP blocks, and a fully integrated solution along with a powerful, easy-to-use GUI that enables users to quickly prototype.

Figure 2-4. SmartFusion 2 Dual-axis Motor Control Starter Kit

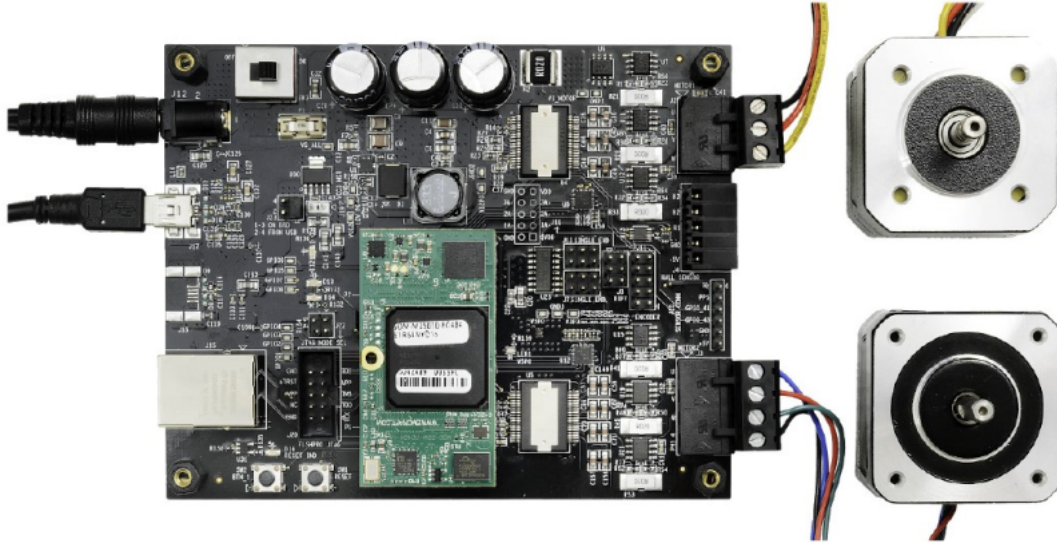

2.8.3 IP Cores

SmartFusion 2 SoC FPGAs contain an Arm Cortex-M3 processor and multiple peripherals hardcoded into the device. In addition to these, Microchip offers many soft peripherals that can be placed in the FPGA fabric of the device. These include Core429, Core1553, CoreJESD204BRX/TX, CoreFRI, CoreFFT, and many other DirectCores. See the [IP Cores](#) web page for more information.

3. Revision History

Revision	Date	Description
C	June 2023	In the revision C of the document, updated the revision history of revision B by adding more information to the change description.
B	May 2023	Following is the summary of changes made in this revision: - Added TQ(G)144 values in Table 1-3. - Updated references of the notes (from 5 to 4) in the MDDR and FDDR columns for packages such as, VGF256, FCGS325, VFG400, FCV(G)484, FG(G)484, FCSG536, and FG(G)676 in Table 1-4. - Updated the Libero SoC Design suite link from Microsemi to Microchip in 2.8.1. Design Software. - Added the SmartFusion 2 Dual-axis Motor Control Starter Kit section under the 2.8.2. Design Hardware section. - Updated the whole document by replacing SmartFusion2 with SmartFusion 2.
A	June 2022	Following is the summary of changes made in this revision: - Document is updated as per Microchip publishing format. - Replaced 51700115 with DS50003317A. - As per Microchip terminology update, replaced Master and Slave with Host and Client respectively. - Updated User I/Os (M2S060 (T/TS): MSIO (3.3V) and Total user I/Os) values in Table 1-1. - Added FCSG158 and VFG784 package options to Table 1-2. - Added FCSG158 and VFG784 values to Table 1-3. - Added FCSG158 and VFG784 details to Table 1-4. - Added FCSG158 and VFG784 values to Table 1-5. - Added VFG784 and FCSG158 columns to Table 1-7. - Updated Figure 2-2, Figure 2-3, and Figure 2-4.
27.0	—	Information about M2S150 FCV484M was added. See SmartFusion2 Military Temperature Grade Devices.
26.0	—	The following is a summary of changes made in revision 26.0: - The maximum payload size was updated from 2 KB to 256 bytes. For more information, see High-Speed Serial Interfaces, page 7 and PCI Express, page 25. - The tables SmartFusion2 Devices without Data Security (All Speed Grades, C, and I Temperature) and SmartFusion2 Data Security S Devices (All Speed Grades, C, and I Temperature) were merged and updated. See Table 7, page 15 (Transceiver and Data Security Support in SmartFusion2 Devices).
25.0	—	Name change from native SerDes interface to native EPCS SerDes interface in the High-Speed Serial Interfaces, page 25 was updated in revision 25.0.
24.0	—	The following is a summary of changes made in revision 24.0: - Updated Table 1, page 8 for Automotive grade 2 - Added a note on Automotive grade 2 in the I/Os Per Package, page 10 - Added Automotive grade 2 information in the Ordering Information, page 14
23.0	—	Updated Table 1, page 8 with more footnotes..
22.0	—	The following is a summary of changes made in revision 22.0: - Updated Table 1, page 8. - Updated Marking Specifications, page 16. - Updated Low Power, page 21. - Updated Table 10, page 27.

.....continued

Revision	Date	Description
21.0	—	The following is a summary of changes made in revision 21.0: • Updated Table 3, page 10 • Added Table 6, page 13, Table 7, page 15, Table 8, page 15 • Updated Marking Specifications, page 16 • Updated Table 10, page 27
20.0	—	The following is a summary of changes made in revision 20.0: • Updated Table 1, page 8, Table 3, page 10, Table 4, page 11, Table 5, page 12, and Table 9, page 20 • Updated Ordering Information, page 14 • Updated Marking Specifications, page 16 • Updated Table 8, page 19, Table 9, page 20 • Updated SmartFusion2 Development Tools, page 26
19.0	—	The following is a summary of changes made in revision 19.0: • Updated Table 1, page 8, Table 3, page 10, Table 4, page 11, Table 5, page 12, and Table 9, page 20 • Removed all instances of and references to M2S100. VQ144 is replaced with TQ144. • Updated Ordering Information, page 14 • Updated Table 8, page 19 and Table 9, page 20 • Updated Table 10, page 27
18.0	—	The following is a summary of changes made in revision 18.0: • Ordering information added to Table 2, page 10 and Table 3, page 10 for the M2S090(T) device in the FCS/FCSG325 package. • Trademark changed to the Register mark for Arm Cortex-M3.
17.0	—	Updated Device Packages 005-VF256 and 150-FCS536 in Table 2, page 10 and Table 5, page 12.
16.0	—	Updated Table 3, page 10, Table 4, page 11, and Table 5, page 12.
15.0	—	The following is a summary of changes made in revision 15.0: • Table 1, page 8 to Table 9, page 20 and Ordering Information, page 14 were updated with Military device data. • Table 9, page 20 and the Marking Specifications, page 16 were added.
14.0	—	The following is a summary of changes made in revision 14.0: • Tables 3-6 were combined into Table 4, page 11. • Fabric Interface Controller features were added to Table 1, page 8. • Packages VQ144 and FCV484 were added to Table 2, page 10 and Table 4, page 11.
13.0	—	The following is a summary of changes made in revision 13.0: • Data Security Feature sections and Device Status table were removed. • Figure 1, page 8 was updated.
12.0	—	The following is a summary of changes made in revision 12.0: • Packages FCS325 and VF256 were added to Table 2, page 10. • Ordering Information, page 14 was updated. • Typo fixed on Figure 1, page 8.

.....continued

Revision	Date	Description
11.0	—	The following is a summary of changes made in revision 11.0: • LSRAM x32/36 widths added. In Table 1, page 8, notes are added referring to updates in Table 3, page 10 –Table 5, page 12 and Table 6. • Ordering Information, page 14 was updated. Part Numbers (tables 7 and 8) were removed. • SmartFusion2 Device Status, page 16 was updated. • M2S090-FG676 and M2S005-VF400 package pinouts finalized.
10.0	—	M2S005-FG484 package pinout I/O count finalized. Typos were corrected.
9.0	—	The following is a summary of changes made in revision 9.0: • A note regarding total logic was added to Table 1, page 8. • Design Security Features, page 19 and Data Security Features, page 20 were added to show the security features supported.
8.0	—	The following is a summary of changes made in revision 8.0: • Figure 1, page 8 was revised to clarify the connections between the Cortex-M3 processor and cache. • I/O counts were updated in Table 1, page 8. • I/O counts and devices were updated. The FG676 package was added to Table 3, page 10. • Features per Device/Package Combination was divided into four new tables, Table 3 through Table 6 to accommodate new features for package/device combinations for the FG676 package, for T and non-T devices. • The status for M2S050T was changed from Advance to Preliminary in the SmartFusion2 Device Status, page 16.
7.0	—	The following is a summary of changes made in revision 7.0: • The SmartFusion2 product brief has been separated from the rest of the SmartFusion2 datasheet. • The SmartFusion2 Development Tools, page 26 has been updated and is now part of the product brief. • The M2S090 device is new. The product family tables and ordering information have been updated.
6.0	—	PLLs and CCCs for MS2025 was corrected from 4 to 6.
5.0	—	The following is a summary of changes made in revision 5.0: • Table 1, page 8 and Table 3, page 10 were revised to correct I/O counts for M2S005/M2S025 and the VF400 and FG484 packages. • Junction temperature for military, industrial, and commercial SmartFusion2 SoC FPGAs was added to the Reliability section. In the Operating Voltage and I/Os section, market leading number of user I/Os with 5G SerDes was added to the. LVTTL/LVCMOS 3.3 V was qualified as MSIO only and DDR was removed from the list under DDRIOs. • Table 4, page 11 is new. • RMII was removed from as a supported PHY interface in the Triple Speed Ethernet MAC, page 23.

.....continued

Revision	Date	Description
4.0	—	The following is a summary of changes made in revision 4.0: • The Ordering Information, page 14 was revised to add Pre-Production as a temperature range. Ambient temperature was corrected to junction temperature in the defined temperature ranges. Speed grades were defined. Table 8 SmartFusion2 Valid Lead-Free Part Numbers for Devices with Design Security is new. • The maximum payload size for PCIe was corrected from 256 bytes to up to 2 KB. More information was included on SDRAM Support in the High-Speed Memory Interfaces, page 7. • The phrase, with 16-bit PIPE interface (Gen1/Gen2), was removed from the PCIe bullet in the High-Speed Serial Interfaces, page 25. • In Table 1, page 8, PCIe Endpoint x4 was corrected to PCIe Endpoint x1, x2, x4. • The number of I/Os for M2S025 in the FG484 package was corrected from 267 to 289 in Table 2, page 10 and Table 3, page 10. • The Y security designator was removed from SmartFusion2 Ordering Information. • The SGMII PHY Interface, page 24 was revised to change from allocating one of the high-speed serial channels to SGMII and by implementing custom logic in the fabric to allocating one of the high-speed serial channels to and utilizing the CoreTBI soft IP block. • The PCI Express, page 25 was corrected to state the SmartFusion2 family has up to four high-speed serial interface blocks rather than two. The following bullets were removed: – Intel's PIPE interface (8-bit/16-bit) to interface between the PHY MAC and PHY (SerDes) – Fully compliant PHY PCS sub-layer (125/250 MHz) • Support for SDRAM memories was removed from the High-Speed Memory Interfaces: DD Rx Memory Controllers, page 25. The text was corrected to state there are up to three, rather than two, DDR subsystems. • The MDDR Subsystem, page 26 was revised to explain that support for 3.3 V Single Data Rate DRAMs (SDRAM) can be obtained by using the SMC_FIC interface. • The FDDR Subsystem, page 26 was revised to remove the statement that the APB configuration bus can be mastered by the MSS directly. • The SmartFusion2 Development Tools, page 26 chapter was revised to indicate that Libero SoC includes SoftConsole (GNU/Eclipse).
3.0	—	The following is a summary of changes made in revision 3.0: • Figure 1, page 8 was updated. • Table 7, page 15 was added.
2.0	—	Information was updated based on ongoing development of specifications.
1.0	—	Information was reorganized and updated based on ongoing development of specifications.

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information

in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVM Express, NVMe, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestlC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-6683-2629-9

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com	Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040	India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820