

Ultra-Low Quiescent Current, 150 mA μ Cap LDO Regulator

Features

- Ultra-Low Input Voltage Range: 1.5V to 6V
- Ultra-Low Output Voltage: 1.0V Minimum Output Voltage
- Low Dropout Voltage: 310 mV at 150 mA
- High Output Accuracy: $\pm 2.0\%$ over Temperature
- μ Cap: Stable with Ceramic or Tantalum Capacitors
- Excellent Line and Load Regulation Specifications
- Zero Shutdown Current
- Reverse Leakage Protection
- Thermal Shutdown and Current Limit Protection
- 5-Lead SOT-23 Package

Applications

- PDAs and Pocket PCs
- Cellular Phones
- Battery-Powered Systems
- Low Power Microprocessor Power Supplies


General Description

The MIC5238 is an ultra-low voltage output, 150 mA LDO regulator. Designed to operate in a single supply or dual supply mode, the MIC5238 consumes only 23 μ A of bias current, which improves efficiency. When operating in dual supply mode, the efficiency greatly improves as the higher voltage supply is only required to supply the 23 μ A bias current while the output and base drive comes off of the much lower input supply voltage.

As a μ Cap regulator, the MIC5238 operates with a 2.2 μ F ceramic capacitor on the output, offering a smaller overall solution. It also incorporates a logic-level enable pin that allows the MIC5238 to be put into a zero off-current mode when disabled.


The MIC5238 is fully protected with current limit and thermal shutdown. It is offered in the 5-lead SOT-23 package with an operating junction temperature range of -40°C to $+125^{\circ}\text{C}$.

Package Types

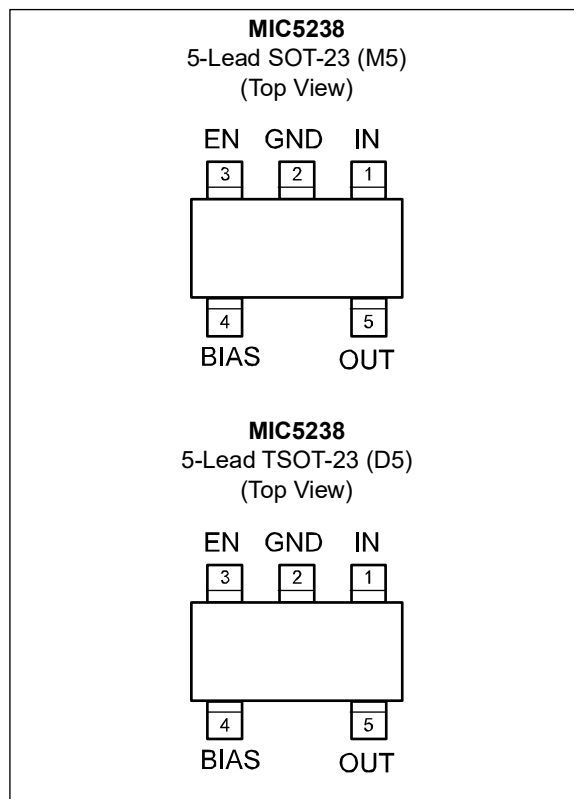


MIC5238

Typical Application Circuit

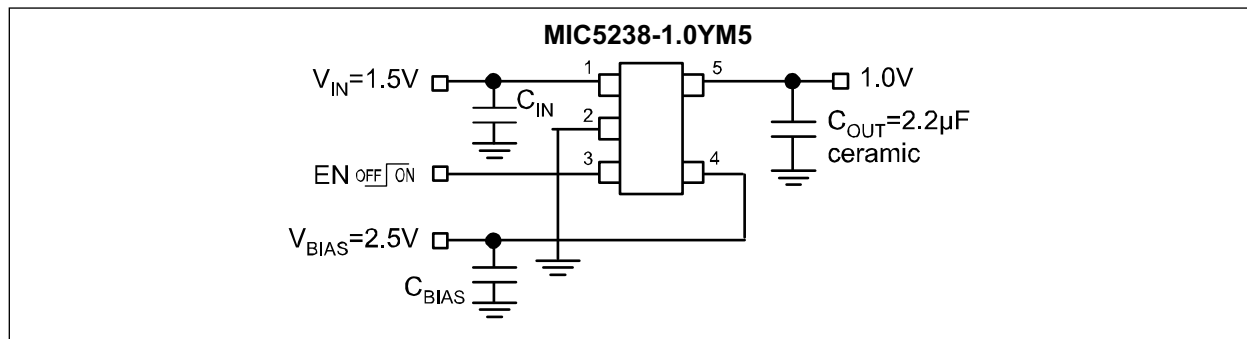

Functional Block Diagram

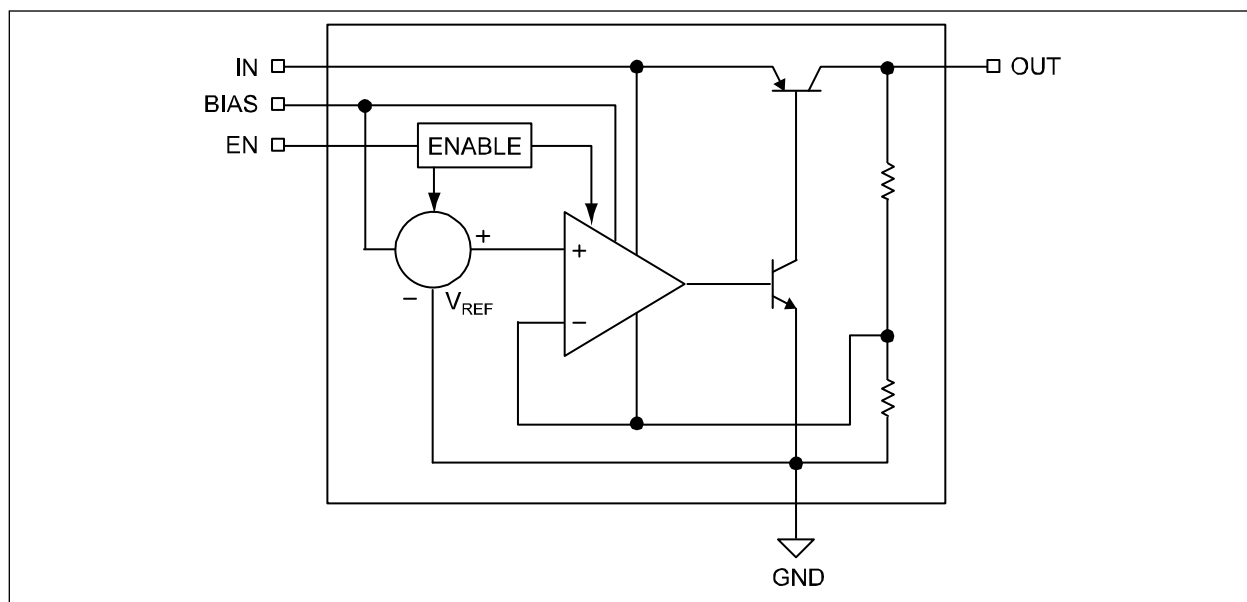

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Input Supply Voltage (V_{IN})	–0.3V to +7V
BIAS Supply Voltage (V_{BIAS})	–0.3V to +7V
Enable Supply Voltage (V_{EN})	–0.3V to +7V
Power Dissipation (P_D)	Internally Limited
ESD Rating (Note 1)	1.5 kV HBM

Operating Ratings ‡

Supply Voltage (V_{IN})	+1.5V to +6V
BIAS Supply Voltage (V_{BIAS})	+2.3V to +6V
Enable Supply Voltage (V_{EN})	0V to +6V

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ **Notice:** The device is not guaranteed to function outside its operating ratings.

Note 1: Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5 kΩ in series with 100 pF.

ELECTRICAL CHARACTERISTICS

Electrical Characteristics: $T_A = +25^\circ\text{C}$ with $V_{IN} = V_{OUT} + 1\text{V}$; $V_{BIAS} = 3.3\text{V}$; $I_{OUT} = 100\text{ }\mu\text{A}$; $V_{EN} = 2\text{V}$, **bold** values valid for $-40^\circ\text{C} < T_J < +125^\circ\text{C}$, unless specified. [Note 1](#)

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Output Voltage Accuracy		–1.5 –2	— —	1.5 2	%	Variation from nominal V_{OUT}
Line Regulation		—	0.25	0.5	%	$V_{BIAS} = 2.3\text{V to }6\text{V}$, Note 2
Input Line Regulation		—	0.04	4	%	$V_{IN} = (V_{OUT} + 1\text{V})$ to 6V
Load Regulation		—	0.7	1	%	Load = 100 μA to 150 mA
Dropout Voltage	V_{DO}	—	50	—	mV	$I_{OUT} = 100\text{ }\mu\text{A}$
		—	230	300		$I_{OUT} = 50\text{ mA}$
		—	—	400		$I_{OUT} = 100\text{ mA}$
		—	270	—		$I_{OUT} = 100\text{ mA}$
		—	310	450		$I_{OUT} = 150\text{ mA}$
		—	—	500		$I_{OUT} = 150\text{ mA}$
BIAS Current, Note 3	I_{BIAS}	—	23	—	μA	$I_{OUT} = 100\text{ }\mu\text{A}$
Input Current on Pin 1	I_{IN}	—	7	20	μA	$I_{OUT} = 100\text{ }\mu\text{A}$
		—	0.35	—	mA	$I_{OUT} = 50\text{ mA}$, Note 4
		—	1	—		$I_{OUT} = 100\text{ mA}$
		—	2	2.5		$I_{OUT} = 150\text{ mA}$
Ground Current in Shutdown	I_{GND_SD}	—	1.5	5	μA	$V_{EN} \leq 0.2\text{V}$, $V_{IN} = 6\text{V}$, $V_{BIAS} = 6\text{V}$
		—	0.5	—		$V_{EN} = 0\text{V}$, $V_{IN} = 6\text{V}$, $V_{BIAS} = 6\text{V}$
Short Circuit Current	I_{SC}	—	350	500	mA	$V_{OUT} = 0\text{V}$
Reverse Leakage Current		—	5	—	μA	$V_{IN} = 0\text{V}$, $V_{EN} = 0\text{V}$, $V_{OUT} = \text{nominal } V_{OUT}$

ELECTRICAL CHARACTERISTICS (CONTINUED)

Electrical Characteristics: $T_A = +25^{\circ}\text{C}$ with $V_{IN} = V_{OUT} + 1\text{V}$; $V_{BIAS} = 3.3\text{V}$; $I_{OUT} = 100\text{ }\mu\text{A}$; $V_{EN} = 2\text{V}$, **bold** values valid for $-40^{\circ}\text{C} < T_J < +125^{\circ}\text{C}$, unless specified. [Note 1](#)

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Enable Input						
Input Low Voltage	V_{IL}	—	—	0.2	V	Regulator OFF
Input High Voltage	V_{IH}	2.0	—	—	V	Regulator ON
Enable Input Current	I_{EN}	-1.0	0.01	1.0	μA	$V_{EN} = 0.2\text{V}$, Regulator OFF
		—	0.1	1.0		$V_{EN} = 0.2\text{V}$, Regulator ON

Note 1: Specification for packaged product only.

2: Line regulation measures a change in output voltage due to a change in the bias voltage.

3: Current measured from bias input to ground.

4: Current differential between output current and main input current at rated load current.

TEMPERATURE SPECIFICATIONS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Junction Temperature Range	T_J	-40	—	+125	$^{\circ}\text{C}$	—
Storage Temperature	T_S	-65	—	+150	$^{\circ}\text{C}$	—
Package Thermal Resistances						
Thermal Resistance, SOT-23 5-Ld	θ_{JA}	—	235	—	$^{\circ}\text{C/W}$	—

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

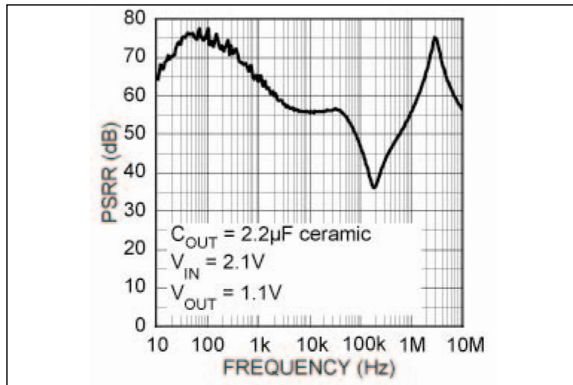


FIGURE 2-1: PSRR 150 mA Load.

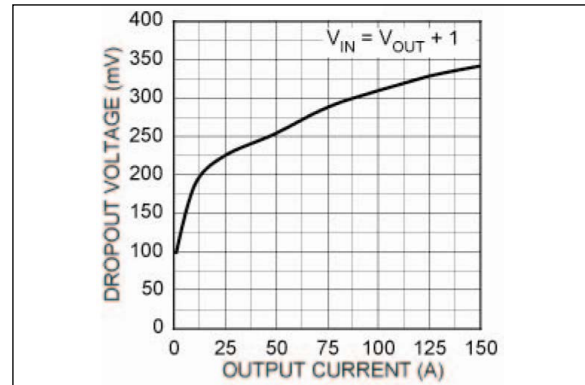


FIGURE 2-4: Dropout Voltage vs Load.

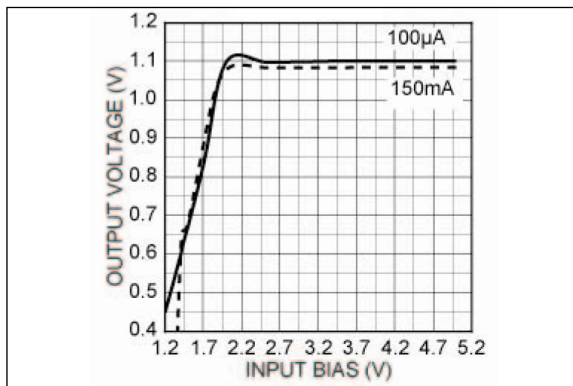


FIGURE 2-2: Output Voltage vs. V_{BIAS} .

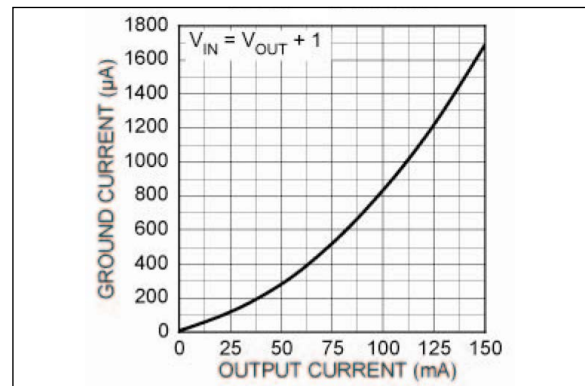


FIGURE 2-5: Ground Current (V_{IN}) vs. Output Current.

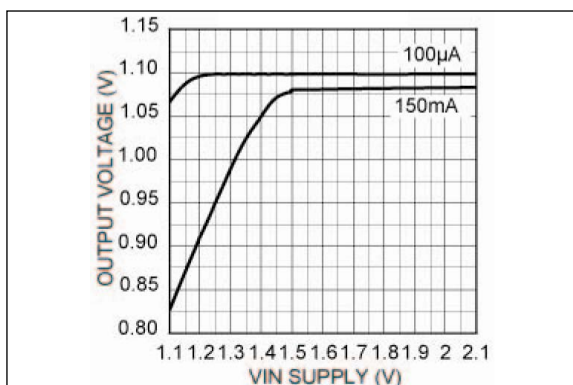


FIGURE 2-3: Output Voltage vs. V_{IN} Supply.

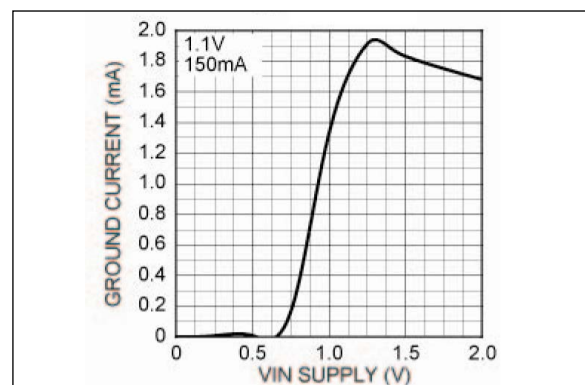


FIGURE 2-6: Ground Current (V_{IN}) vs. V_{IN} Supply.

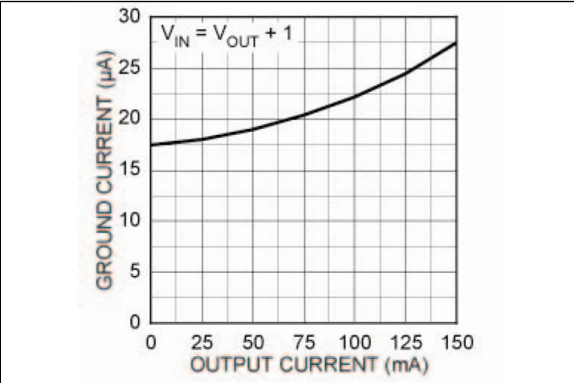


FIGURE 2-7: Ground Current (V_{BIAS}) vs. Output Current.

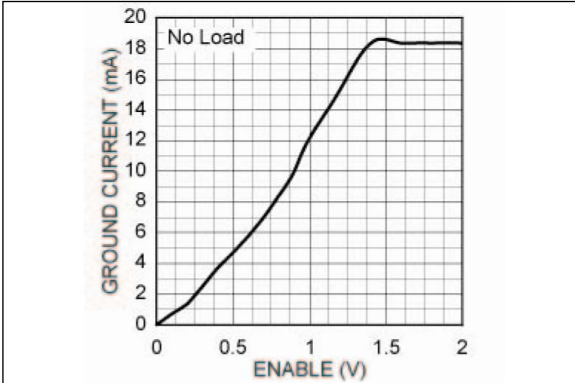


FIGURE 2-10: Shutdown Current of V_{BIAS} .

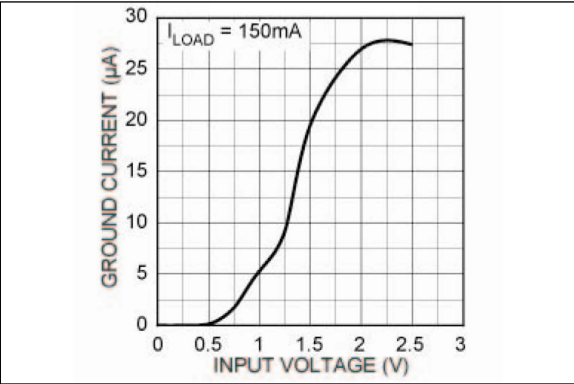


FIGURE 2-8: Ground Current (V_{BIAS}) vs. Input Voltage.

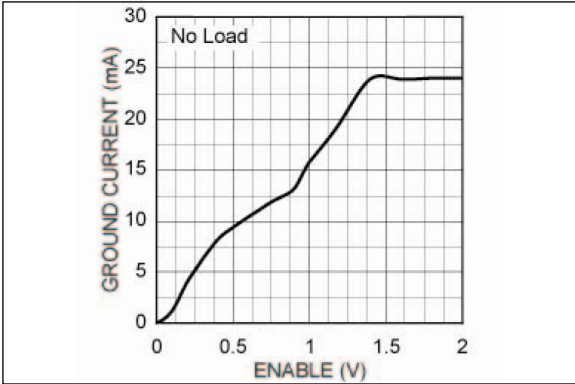


FIGURE 2-11: Shutdown Current V_{BIAS} & V_{IN} Tied.

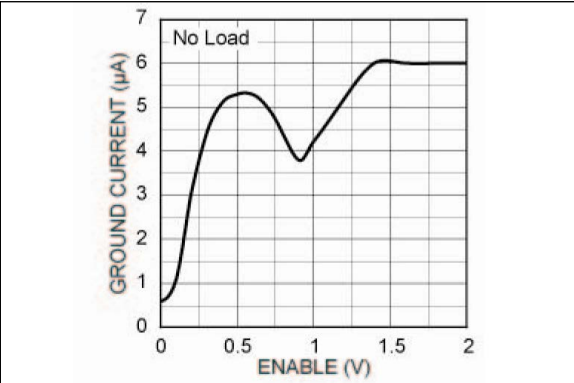


FIGURE 2-9: Shutdown Current of V_{IN} .

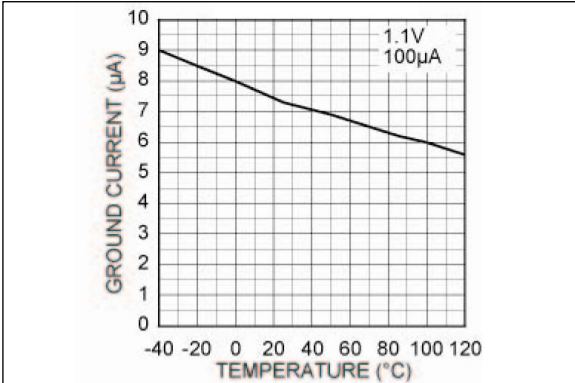


FIGURE 2-12: Ground Current (V_{IN}) vs. Temperature.

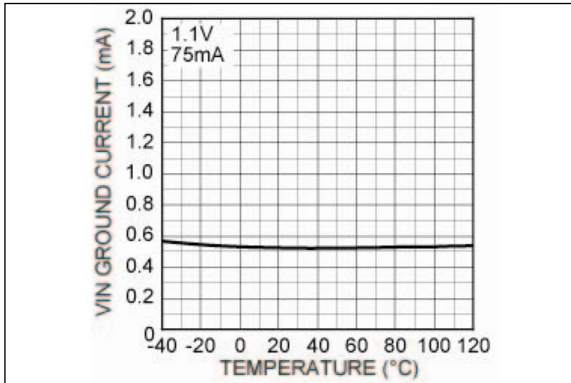


FIGURE 2-13: V_{IN} Ground Current vs. Temperature.

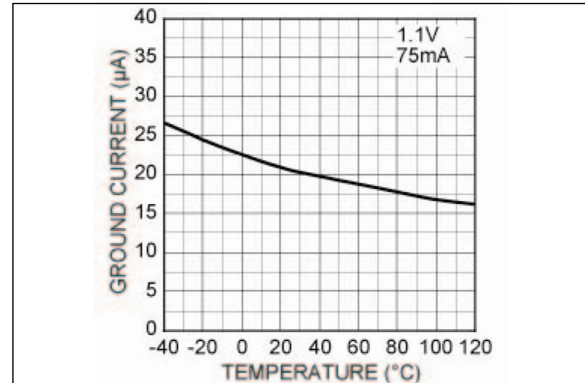


FIGURE 2-16: Ground Current (V_{IN}) vs. Temperature.

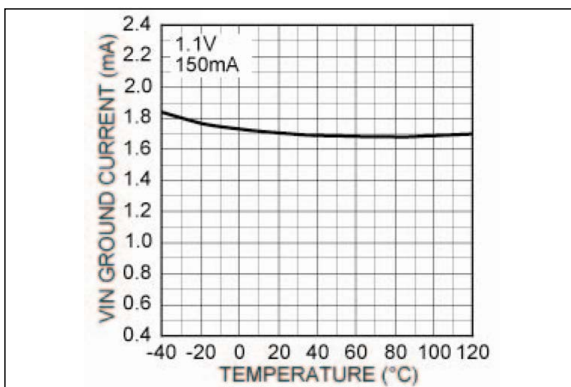


FIGURE 2-14: V_{IN} Ground Current vs. Temperature.

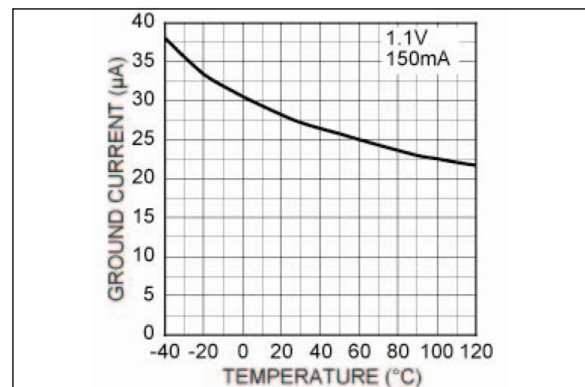


FIGURE 2-17: Ground Current (V_{BIAS}) vs. Temperature.

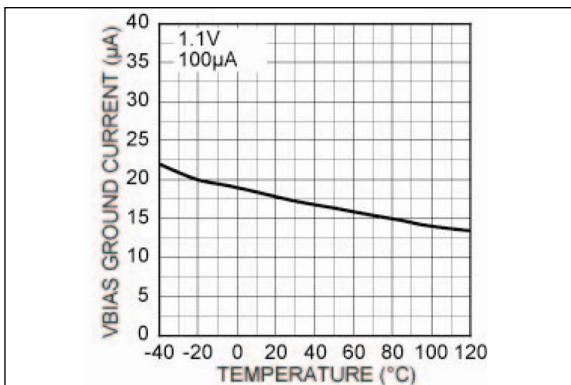


FIGURE 2-15: V_{BIAS} Ground Current vs. Temperature.

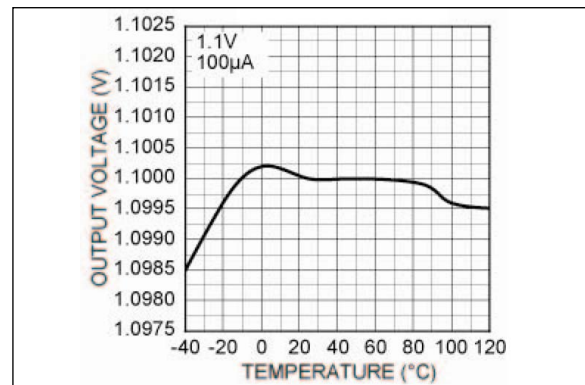


FIGURE 2-18: Output Voltage vs. Temperature.

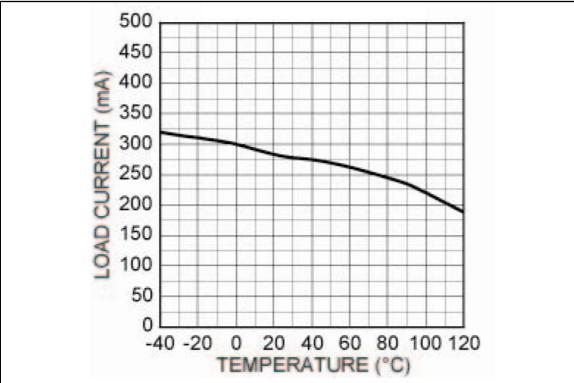


FIGURE 2-19: Short Circuit Current vs. Temperature.

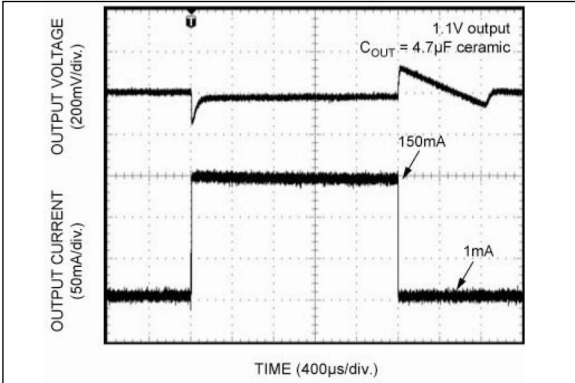


FIGURE 2-22: Load Transient Response.

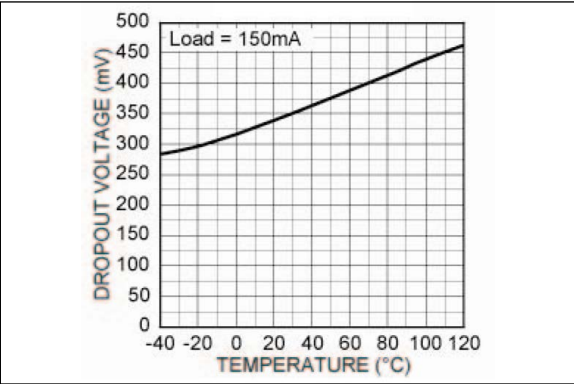


FIGURE 2-20: Dropout Voltage vs. Temperature.

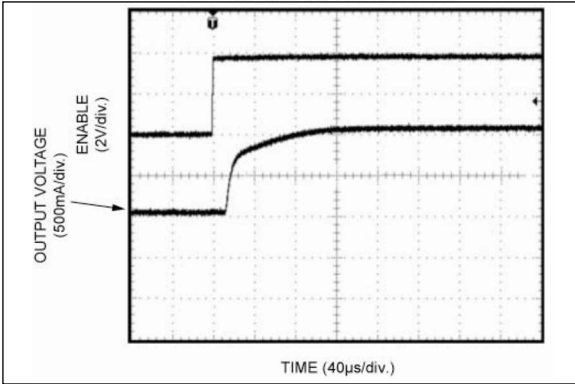


FIGURE 2-23: EN Turn-On Characteristic.

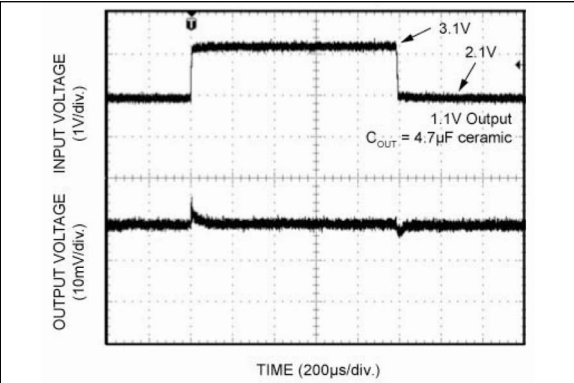


FIGURE 2-21: Line Transient Response.

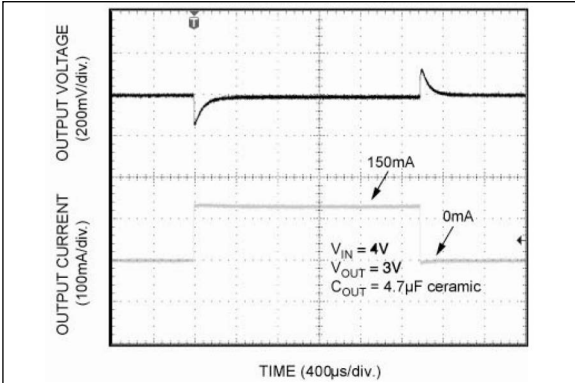


FIGURE 2-24: Load Transient Response.

3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

TABLE 3-1: PIN FUNCTION TABLE

Pin Number	Pin Name	Description
1	IN	Supply Input
2	GND	Ground
3	EN	Enable (Input): Logic Low = shutdown; Logic High = enable. Do not leave open.
4	BIAS	Bias Supply Input
5	OUT	Regulator Output

4.0 APPLICATION INFORMATION

4.1 Enable/Shutdown

The MIC5238 comes with an active-high enable pin that allows the regulator to be disabled. Forcing the enable pin low disables the regulator and sends it into a “zero” off-mode current state. In this state, current consumed by the regulator goes nearly to zero. Forcing the enable pin high enables the output voltage.

4.2 Input Bias Capacitor

The input capacitor must be rated to sustain voltages that may be used on the input. An input capacitor may be required when the device is not near the source power supply or when supplied by a battery. Small, surface mount, ceramic capacitors can be used for bypassing. Larger values may be required if the source supply has high ripple.

4.3 Output Capacitor

The MIC5238 requires an output capacitor for stability. The design requires 2.2 μF or greater on the output to maintain stability. The design is optimized for use with low-ESR ceramic chip capacitors. High ESR capacitors may cause high frequency oscillation. The maximum recommended ESR is 3 Ω . The output capacitor can be increased without limit. Larger valued capacitors help to improve transient response.

X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60% respectively over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than a X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

4.4 No-Load Stability

The MIC5238 will remain stable and in regulation with no load unlike many other voltage regulators. This is especially important in CMOS RAM keep-alive applications.

4.5 Thermal Considerations

The MIC5238 is designed to provide 150 mA of continuous current in a very small package. Maximum power dissipation can be calculated based on the output current and the voltage drop across the part. To determine the maximum power dissipation of the

package, use the junction-to-ambient thermal resistance of the device and the following basic equation:

EQUATION 4-1:

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{\theta_{JA}}$$

$T_{J(MAX)}$ is the maximum junction temperature of the die, 125°C, and T_A is the ambient operating temperature. θ_{JA} is layout-dependent. The [Temperature Specifications](#) table shows the junction-to-ambient thermal resistance for the MIC5238.

The actual power dissipation of the regulator circuit can be determined using the following equation:

EQUATION 4-2:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND}$$

Substituting $P_{D(MAX)}$ for P_D and solving for the operating conditions that are critical to the application will give the maximum operating conditions for the regulator circuit. For example, when operating the MIC5238-1.0YM5 at 50°C with a minimum footprint layout, the maximum input voltage for a set output current can be determined as follows.

EQUATION 4-3:

$$P_{D(MAX)} = \frac{125^\circ\text{C} - 50^\circ\text{C}}{235^\circ\text{C/W}} = 319\text{mW}$$

The junction-to-ambient (θ_{JA}) thermal resistance for the minimum footprint is 235°C/W, from the [Temperature Specifications](#) table. It is important that the maximum power dissipation not be exceeded to ensure proper operation. With very high input-to-output voltage differentials, the output current is limited by the total power dissipation. Total power dissipation is calculated using the following equation:

EQUATION 4-4:

$$P_{D(MAX)} = (V_{IN} - V_{OUT})I_{OUT} + V_{IN} \times I_{GND} + V_{BIAS} \times I_{BIAS}$$

Because the bias supply draws only 18 μA , that contribution can be ignored for this calculation.

If we know the maximum load current, we can solve for the maximum input voltage using the maximum power dissipation calculated for a 50°C ambient, 319 mW.

EQUATION 4-5:

$$P_{D(MAX)} = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND}$$

$$319mW = (V_{IN} - 1V) \times 150mA + V_{IN} \times 2.8mA$$

Ground pin current is estimated using the typical characteristics of the device.

EQUATION 4-6:

$$469mW = V_{IN} \times 152.8mA$$

$$V_{IN} = 3.07V$$

For higher current outputs only a lower input voltage will work for higher ambient temperatures.

Assuming a lower output current of 20 mA, the maximum input voltage can be recalculated:

EQUATION 4-7:

$$319mW = (V_{IN} - 1V) \times 20mA + V_{IN} \times 0.2mA$$

$$339mW = V_{IN} \times 20.2mA$$

$$V_{IN} = 16.8V$$

Maximum input voltage for a 20 mA load current at 50°C ambient temperature is 16.8V. Because the device has a 6V rating, it will operate over the whole input range.

4.6 Dual Supply Mode Efficiency

By utilizing a bias supply the conversion efficiency can be greatly enhanced. This can be realized as the higher bias supply will only consume a few microamps while the input supply will require a few milliamps. This equates to higher efficiency saving valuable power in the system. As an example, consider an output voltage of 1V with an input supply of 2.5V at a load current of 150 mA. The input ground current under these conditions is 2 mA, while the bias current is only 20 µA. If we calculate the conversion efficiency using the single supply approach, it is as follows:

Input power = $V_{IN} \times \text{output current} + V_{IN} \times (V_{BIAS} \text{ ground current} + V_{IN} \text{ ground current})$

Input power = $2.5V \times 150mA + 2.5 \times (0.0002 + 0.002)$
= 380.5 mW

Output power = $1V \times 0.15 = 150mW$

Efficiency = $150/380.5 \times 100 = 39.4\%$

Now, using a lower input supply of 1.5V, and powering the bias voltage only from the 2.5V input, the efficiency is as follows:

Input power = $V_{IN} \times \text{output current} + V_{IN} \times V_{IN} \text{ ground current} + V_{BIAS} \times V_{BIAS} \text{ ground current}$

Input power = $1.5 \times 150mA + 1.5 \times 0.002 + 2.5 \times 0.0002 = 225mW$

Output power = $1V \times 150mA = 150mW$

Efficiency = $150/225 \times 100 = 66.6\%$

Therefore, by using the dual supply MIC5238 LDO the efficiency is nearly doubled over the single supply version.

This is a valuable asset in portable power management applications equating to longer battery life and less heat being generated in the application.

This in turn will allow a smaller footprint design and an extended operating life.

5.0 PACKAGING INFORMATION

5.1 Package Marking Information

5-Lead SOT-23* (Front)	Example	5-Lead TSOT-23* (Front)	Example
XXXX	L411	XXXX	N410
5-Lead SOT-23* (Back)	Example	5-Lead TSOT-23* (Back)	Example
NNN	H93	NNN	P4N

Legend: XX...X Product code or customer-specific information
Y Year code (last digit of calendar year)
YY Year code (last 2 digits of calendar year)
WW Week code (week of January 1 is week '01')
NNN Alphanumeric traceability code
(e3) Pb-free JEDEC® designator for Matte Tin (Sn)
* This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.

•, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).


Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.

Underbar (_) symbol may not be to scale.

Note: If the full seven-character YYWWNNN code cannot fit on the package, the following truncated codes are used based on the available marking space:
6 Characters = YWWNNN; 5 Characters = WWNNN; 4 Characters = WNNN; 3 Characters = NNN;
2 Characters = NN; 1 Character = N

5-Lead Plastic Small Outline Transistor (6BX) [SOT23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

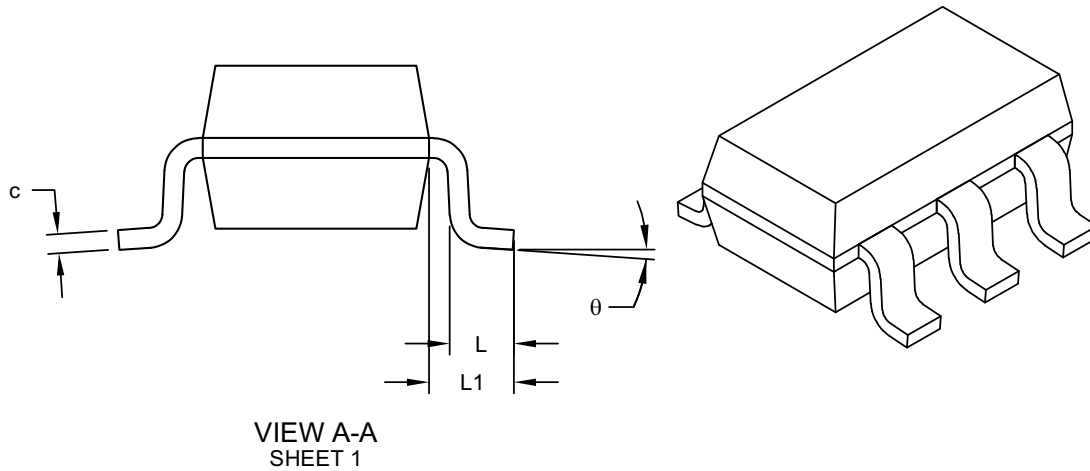

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	5		
Pitch	e	0.95 BSC		
Outside lead pitch	e1	1.90 BSC		
Overall Height	A	0.90	-	1.45
Molded Package Thickness	A2	0.89	-	1.30
Standoff	A1	-	-	0.15
Overall Width	E	2.80 BSC		
Molded Package Width	E1	1.60 BSC		
Overall Length	D	2.90 BSC		
Foot Length	L	0.30	-	0.60
Footprint	L1	0.60 REF		
Foot Angle	φ	0°	-	10°
Lead Thickness	c	0.08	-	0.26
Lead Width	b	0.20	-	0.51



Notes:

- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-091-6BX Rev G Sheet 2 of 2

5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT] Micrel Legacy Package TSOT-5LD-PL-1


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

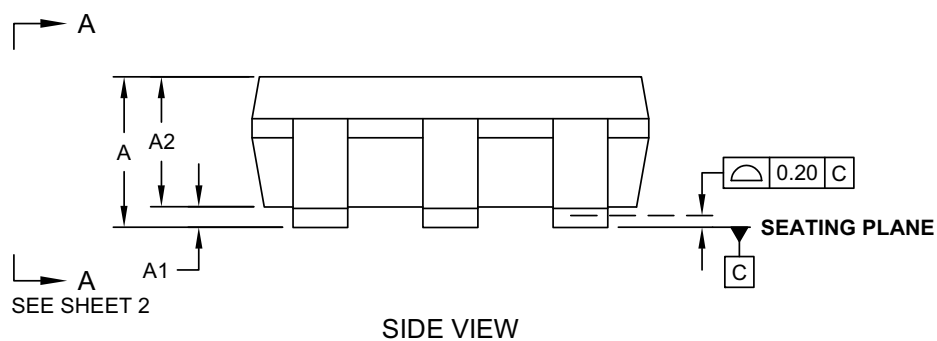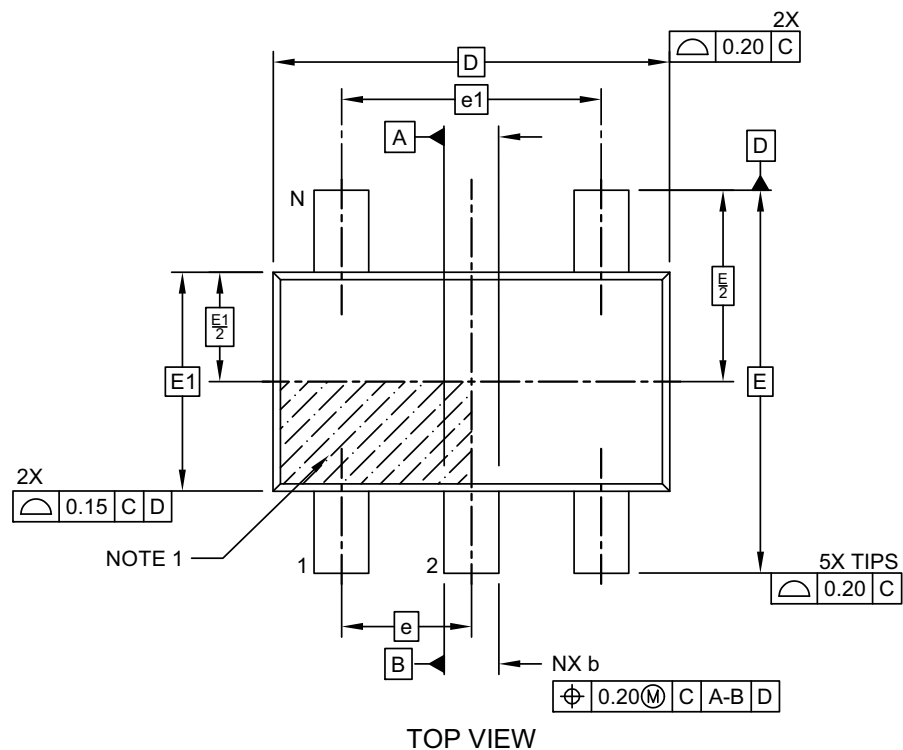

Microchip Technology Drawing C04-1179 Rev A Sheet 1 of 2

5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT] Micrel Legacy Package TSOT-5LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

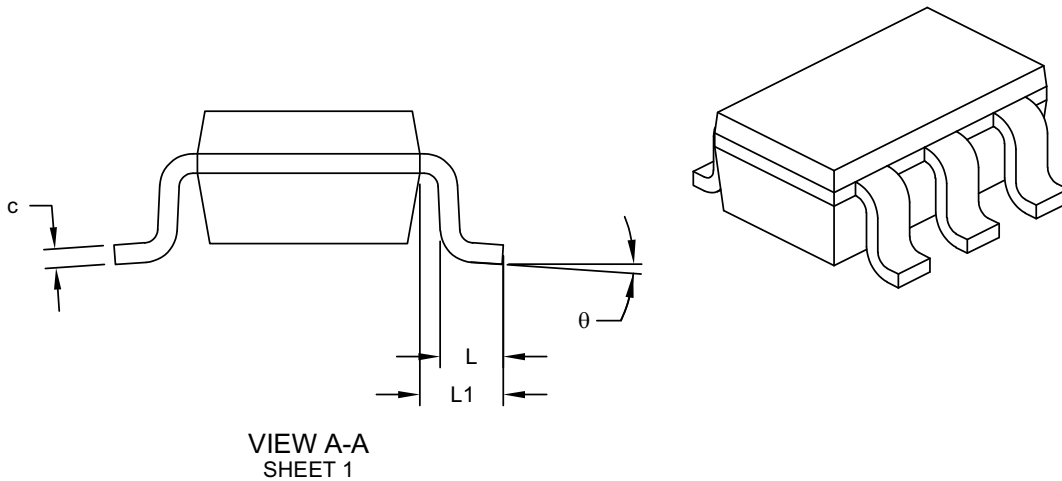

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Leads	N	5		
Pitch	e	0.95 BSC		
Outside lead pitch	e1	1.90 BSC		
Overall Height	A	-	-	1.00
Molded Package Thickness	A2	0.84	0.87	0.90
Standoff	A1	0.00	-	0.10
Overall Width	E	2.80 BSC		
Molded Package Width	E1	1.60 BSC		
Overall Length	D	2.90 BSC		
Foot Length	L	0.30	0.40	0.50
Footprint	L1	0.60 REF		
Foot Angle	φ	0°	-	4°
Lead Thickness	c	0.127 REF		
Lead Width	b	0.30	-	0.50


Notes:

- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1179 Rev A Sheet 1 of 2

5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT] Micrel Legacy Package TSOT-5LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

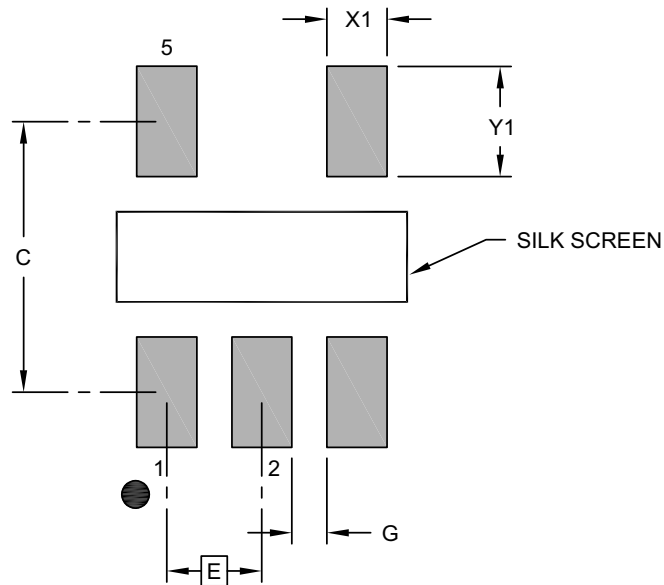

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.95 BSC		
Contact Pad Spacing	C		2.60	
Contact Pad Width (X5)	X1			0.60
Contact Pad Length (X5)	Y1			1.10
Contact Pad to Center Pad (X2)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3179 Rev A

APPENDIX A: REVISION HISTORY

Revision A (August 2023)

- Converted Micrel document MIC5238 to Microchip data sheet DS20006759A.
- Minor text changes throughout.

MIC5238

NOTES:

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

For order or obtain information, e.g., an pricing or delivery, contact your local microchip representative or sales office.

<u>Part Number</u>	<u>-X.X</u>	<u>X</u>	<u>XX</u>	<u>-XX</u>																											
Device	Output Voltage	Temp. Range	Package	Media Type																											
Device: MIC5238: Ultra-Low Quiescent Current, 150 mA μCap LDO Regulator Output Voltage: <table> <tr><td>1.0</td><td>=</td><td>1.0V</td></tr> <tr><td>1.1</td><td>=</td><td>1.1V</td></tr> <tr><td>1.2</td><td>=</td><td>1.2V (Thin SOT-23 Only)</td></tr> <tr><td>1.3</td><td>=</td><td>1.3V</td></tr> </table> Temperature Range: <table> <tr><td>Y</td><td>=</td><td>-40°C to +125°C</td></tr> </table> Package: <table> <tr><td>M5</td><td>=</td><td>5-Lead SOT-23</td></tr> <tr><td>D5</td><td>=</td><td>5-Lead Thin SOT-23</td></tr> </table> Media Type: <table> <tr><td>TR</td><td>=</td><td>3,000/Reel</td></tr> <tr><td>TX</td><td>=</td><td>3,000/Reel Rev. (SOT-23 Only)</td></tr> </table>					1.0	=	1.0V	1.1	=	1.1V	1.2	=	1.2V (Thin SOT-23 Only)	1.3	=	1.3V	Y	=	-40°C to +125°C	M5	=	5-Lead SOT-23	D5	=	5-Lead Thin SOT-23	TR	=	3,000/Reel	TX	=	3,000/Reel Rev. (SOT-23 Only)
1.0	=	1.0V																													
1.1	=	1.1V																													
1.2	=	1.2V (Thin SOT-23 Only)																													
1.3	=	1.3V																													
Y	=	-40°C to +125°C																													
M5	=	5-Lead SOT-23																													
D5	=	5-Lead Thin SOT-23																													
TR	=	3,000/Reel																													
TX	=	3,000/Reel Rev. (SOT-23 Only)																													
Examples: a) MIC5238-1.0YM5-TR: MIC5238, 1.0V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead SOT-23, 3,000/Reel b) MIC5238-1.1YD5-TR: MIC5238, 1.1V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TSOT-23, 3,000/Reel c) MIC5238-1.3YM5-TX: MIC5238, 1.3V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead SOT-23, 3,000/Reel Reverse d) MIC5238-1.2YD5-TR: MIC5238, 1.2V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead TSOT-23, 3,000/Reel e) MIC5238-1.1YM5-TR: MIC5238, 1.1V Output Voltage, -40°C to +125°C Temp. Range, 5-Lead SOT-23, 3,000/Reel																															

| **Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option. | | | | |

MIC5238

NOTES:

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
 - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
 - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
 - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
-

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maxStylus, maxTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-2921-4

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820