

# NCP4681, NCP4684

## 150 mA, Ultra Low Quiescent Current, Low Dropout Regulator

The NCP4681 and NCP4684 are CMOS Linear voltage regulators with 150 mA output current capability and ultra low supply currents (1  $\mu$ A typ.) The devices are easy to use and include output current protection and a fully integrated soft-start circuit to minimize inrush current and to ensure no output voltage overshoot. The NCP4681 includes an Enable function to reduce supply current by using a Standby mode, while the NCP4684 excludes the Enable pin to avoid any pull down current, thereby offering the lowest possible current consumption for battery powered applications in Active mode. For portable products the devices are available in the exceptionally small 0.8 x 0.8 mm XDFN, along with the SC-70 and SOT23 packages

### Features

- Operating Input Voltage Range: 1.40 V to 5.25 V
- Output Voltage Range: 0.8 V to 3.6 V (available in 0.1 V steps)
- Output Voltage Accuracy:  $\pm 1.0\%$
- Supply Current: 1  $\mu$ A (excluding the CE pull down current)
- Dropout Voltage: 0.28 V ( $I_{OUT} = 150$  mA,  $V_{OUT} = 2.8$  V)
- Line Regulation: 0.02%/V Typ.
- Stable with Ceramic Capacitors: 0.1  $\mu$ F or more
- Current Fold Back Protection
- Build-in Constant Slope Circuit for soft-start function
- Available in XDFN4 0.8 x 0.8 mm, SC-70, SOT23 Packages
- These are Pb-Free Devices

### Typical Applications

- Battery-powered Equipment
- Networking and Communication Equipment
- Cameras, DVRs, STB and Camcorders
- Home Appliances

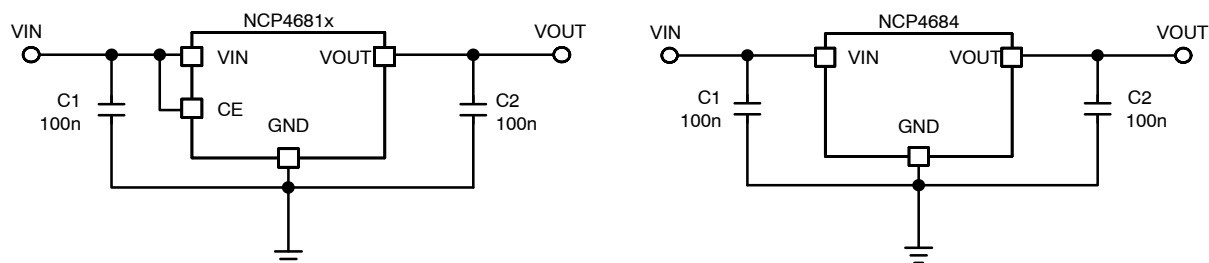





Figure 1. Typical Application Schematics



ON Semiconductor®

<http://onsemi.com>

### MARKING DIAGRAMS




X, XXXX = Specific Device Code  
MM = Date Code

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 15 of this data sheet.

## NCP4681, NCP4684

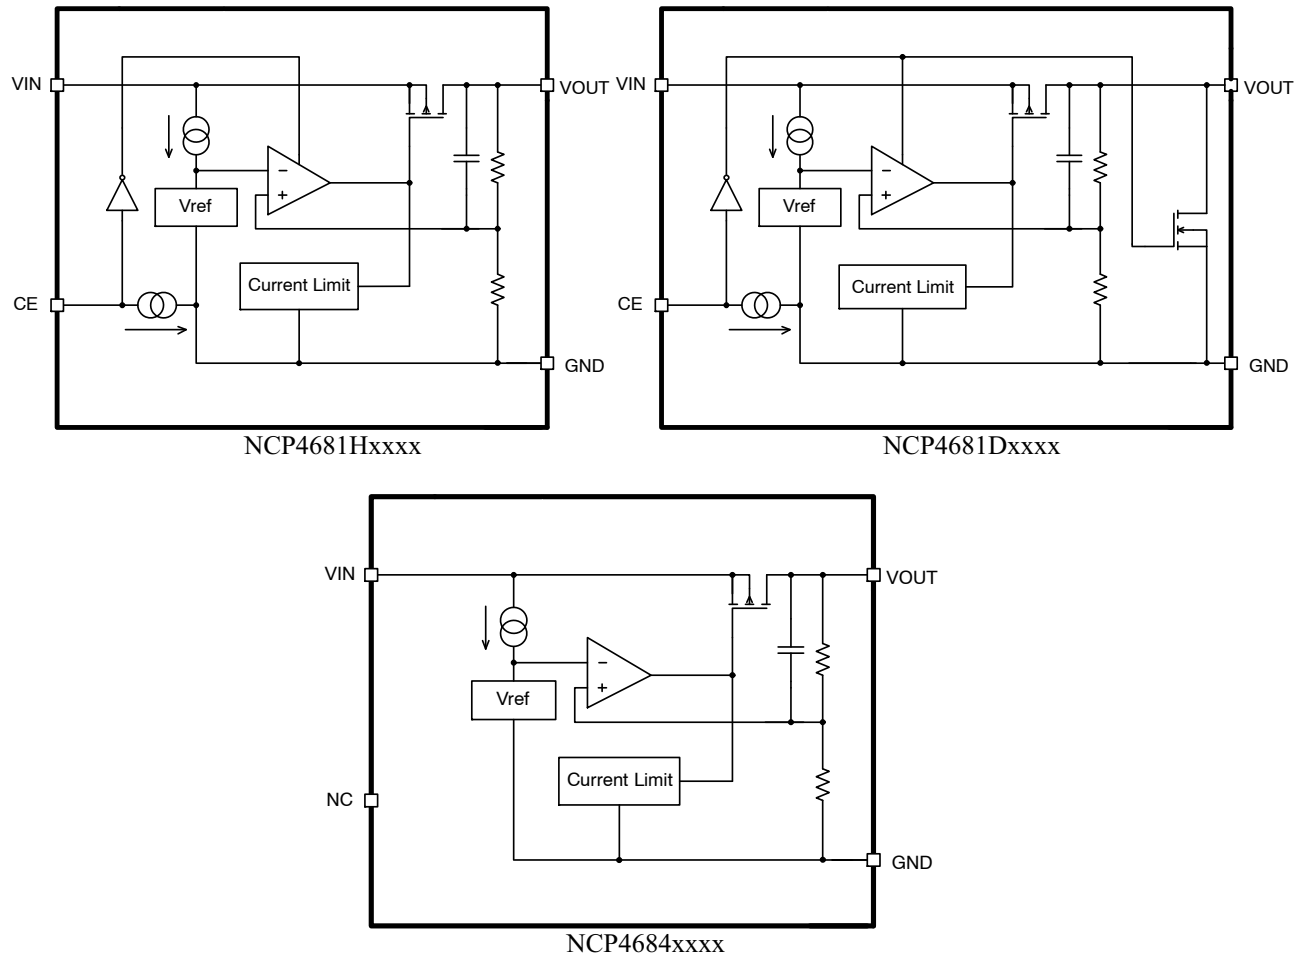

**Figure 2. Simplified Schematic Block Diagram**

### PIN FUNCTION DESCRIPTION

| Pin No.<br>XDFN0808* | Pin No.<br>SC-70 | Pin No.<br>SOT23 | Pin Name         | Description                                            |
|----------------------|------------------|------------------|------------------|--------------------------------------------------------|
| 1                    | 4                | 5                | V <sub>OUT</sub> | Output pin                                             |
| 2                    | 3                | 2                | GND              | Ground                                                 |
| 3                    | 1                | 3                | CE/NC            | Chip enable pin (Active "H") / No connection (NCP4684) |
| 4                    | 5                | 1                | V <sub>IN</sub>  | Input pin                                              |
| –                    | 2                | 4                | NC               | No connection                                          |

\*Tab is GND level. (They are connected to the reverse side of this IC.  
The tab is better to be connected to the GND, but leaving it open is also acceptable.

# NCP4681, NCP4684

## ABSOLUTE MAXIMUM RATINGS

| Rating                                    | Symbol      | Value                  | Unit |
|-------------------------------------------|-------------|------------------------|------|
| Input Voltage (Note 1)                    | $V_{IN}$    | 6.0                    | V    |
| Output Voltage                            | $V_{OUT}$   | -0.3 to $V_{IN} + 0.3$ | V    |
| Chip Enable Input                         | $V_{CE}$    | 6.0                    | V    |
| Output Current                            | $I_{OUT}$   | 180                    | mA   |
| Power Dissipation XDFN0808                | $P_D$       | 286                    | mW   |
| Power Dissipation SC-70                   |             | 380                    |      |
| Power Dissipation SOT23                   |             | 420                    |      |
| Junction Temperature                      | $T_J$       | -40 to 150             | °C   |
| Storage Temperature                       | $T_{STG}$   | -55 to 125             | °C   |
| ESD Capability, Human Body Model (Note 2) | $ESD_{HBM}$ | 2000                   | V    |
| ESD Capability, Machine Model (Note 2)    | $ESD_{MM}$  | 200                    | V    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

2. This device series incorporates ESD protection and is tested by the following methods:

ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)

ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)

Latch-up Current Maximum Rating tested per JEDEC standard: JESD78.

## THERMAL CHARACTERISTICS

| Rating                                                                            | Symbol          | Value | Unit |
|-----------------------------------------------------------------------------------|-----------------|-------|------|
| Thermal Characteristics, XDFN 0.8 x 0.8 mm<br>Thermal Resistance, Junction-to-Air | $R_{\theta JA}$ | 350   | °C/W |
| Thermal Characteristics, SOT23<br>Thermal Resistance, Junction-to-Air             | $R_{\theta JA}$ | 238   | °C/W |
| Thermal Characteristics, SC-70<br>Thermal Resistance, Junction-to-Air             | $R_{\theta JA}$ | 263   | °C/W |

# NCP4681, NCP4684

## ELECTRICAL CHARACTERISTICS

$-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ;  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$  or  $2.5\text{ V}$ , whichever is greater;  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 0.1\text{ }\mu\text{F}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}\text{C}$ .

| Parameter                               | Test Conditions                                                                                                                             |                                            | Symbol                      | Min    | Typ       | Max    | Unit                    |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------------------|--------|-----------|--------|-------------------------|
| Operating Input Voltage                 | (Note 3)                                                                                                                                    |                                            | $V_{IN}$                    | 1.40   |           | 5.25   | V                       |
| Output Voltage                          | $T_A = +25^{\circ}\text{C}$                                                                                                                 | $V_{OUT} \geq 2.0\text{ V}$                | $V_{OUT}$                   | x0.99  |           | x1.01  | V                       |
|                                         |                                                                                                                                             | $V_{OUT} < 2.0\text{ V}$                   |                             | -20    |           | 20     | mV                      |
|                                         | $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$                                                                                      | $V_{OUT} \geq 2.0\text{ V}$                |                             | x0.970 |           | x1.025 | V                       |
|                                         |                                                                                                                                             | $V_{OUT} < 2.0\text{ V}$                   |                             | -60    |           | 60     | mV                      |
| Output Voltage Temp. Coefficient        | $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$                                                                                      |                                            | $\Delta V_{OUT}/\Delta T_A$ |        | $\pm 100$ |        | ppm/ $^{\circ}\text{C}$ |
| Line Regulation                         | $V_{OUT(NOM)} + 0.5\text{ V} \leq V_{IN} \leq 5.0\text{ V}$                                                                                 |                                            | $\text{LineReg}$            |        | 0.02      | 0.10   | %/V                     |
| Load Regulation                         | $I_{OUT} = 1\text{ mA}$ to $150\text{ mA}$                                                                                                  |                                            | $\text{LoadReg}$            | -20    | 0         | 20     | mV                      |
| Dropout Voltage                         | $I_{OUT} = 150\text{ mA}$                                                                                                                   | $0.8\text{ V} \leq V_{OUT} < 0.9\text{ V}$ | $V_{DO}$                    |        | 0.96      | 1.40   | V                       |
|                                         |                                                                                                                                             | $0.9\text{ V} \leq V_{OUT} < 1.0\text{ V}$ |                             |        | 0.87      | 1.25   |                         |
|                                         |                                                                                                                                             | $1.0\text{ V} \leq V_{OUT} < 1.2\text{ V}$ |                             |        | 0.78      | 1.15   |                         |
|                                         |                                                                                                                                             | $1.2\text{ V} \leq V_{OUT} < 1.4\text{ V}$ |                             |        | 0.64      | 1.00   |                         |
|                                         |                                                                                                                                             | $1.4\text{ V} \leq V_{OUT} < 1.7\text{ V}$ |                             |        | 0.52      | 0.80   |                         |
|                                         |                                                                                                                                             | $1.7\text{ V} \leq V_{OUT} < 2.0\text{ V}$ |                             |        | 0.40      | 0.60   |                         |
|                                         |                                                                                                                                             | $2.0\text{ V} \leq V_{OUT} < 2.5\text{ V}$ |                             |        | 0.32      | 0.48   |                         |
|                                         |                                                                                                                                             | $2.5\text{ V} \leq V_{OUT} < 3.0\text{ V}$ |                             |        | 0.28      | 0.40   |                         |
|                                         |                                                                                                                                             | $3.0\text{ V} \leq V_{OUT} < 3.6\text{ V}$ |                             |        | 0.25      | 0.35   |                         |
| Output Current                          |                                                                                                                                             |                                            | $I_{OUT}$                   | 150    |           |        | mA                      |
| Short Current Limit                     | $V_{OUT} = 0\text{ V}$                                                                                                                      |                                            | $I_{SC}$                    |        | 50        |        | mA                      |
| Quiescent Current                       |                                                                                                                                             |                                            | $I_Q$                       |        | 1         | 2      | $\mu\text{A}$           |
| Standby Current                         | $V_{CE} = 0\text{ V}$ , $T_A = 25^{\circ}\text{C}$ , NCP4681 only                                                                           |                                            | $I_{STB}$                   |        | 0.1       | 1.0    | $\mu\text{A}$           |
| CE Pin Threshold Voltage (NCP4681 only) | CE Input Voltage "H"                                                                                                                        |                                            | $V_{CEH}$                   | 1.0    |           |        | V                       |
|                                         | CE Input Voltage "L"                                                                                                                        |                                            | $V_{CEL}$                   |        |           | 0.4    |                         |
| CE Pull Down Current                    | NCP4681 only                                                                                                                                |                                            | $I_{CEPD}$                  |        | 0.3       |        | $\mu\text{A}$           |
| Power Supply Rejection Ratio            | $V_{OUT} = 1.5\text{ V}$ , $V_{IN} = 2.5\text{ V}$ , $\Delta V_{IN} = 0.2\text{ V}_{pk-pk}$ , $I_{OUT} = 30\text{ mA}$ , $f = 1\text{ kHz}$ |                                            | PSRR                        |        | 25        |        | dB                      |
| Output Noise Voltage                    | $f = 10\text{ Hz}$ to $100\text{ kHz}$ , $V_{OUT} = 1.5\text{ V}$ , $V_{IN} = 2.5\text{ V}$ , $I_{OUT} = 30\text{ mA}$                      |                                            | $V_N$                       |        | 100       |        | $\mu\text{V}_{rms}$     |
| Low Output Nch Tr. On Resistance        | $V_{IN} = 4\text{ V}$ , $V_{CE} = 0\text{ V}$ , NCP4681D only                                                                               |                                            | $R_{LOW}$                   |        | 60        |        | $\Omega$                |

3. The maximum Input Voltage of the Electrical Characteristics is 5.25 V. In case of exceeding this specification, the IC must be operated in condition that the Input Voltage is up to 5.50 V and total operation time is within 500 hours.

TYPICAL CHARACTERISTICS

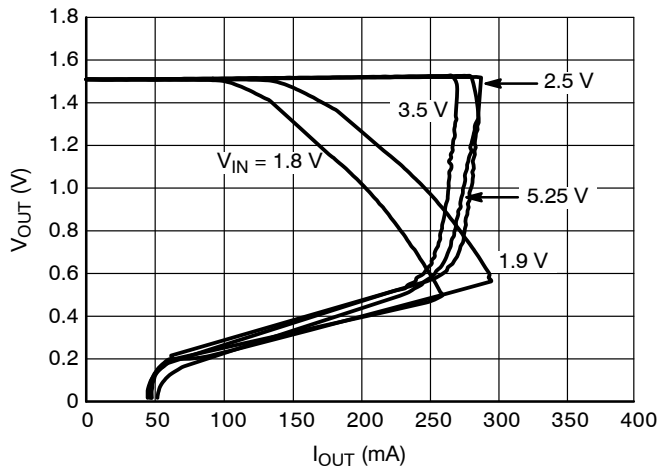


Figure 3. Output Voltage vs. Output Current  
1.5 V Version ( $T_J = 25^\circ\text{C}$ )

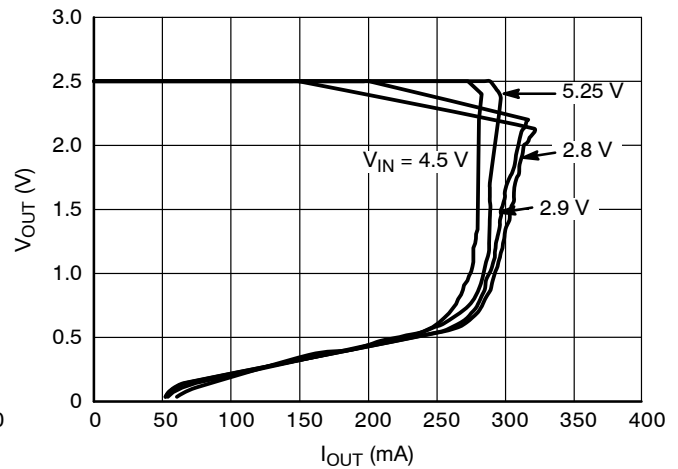


Figure 4. Output Voltage vs. Output Current  
2.5 V Version ( $T_J = 25^\circ\text{C}$ )

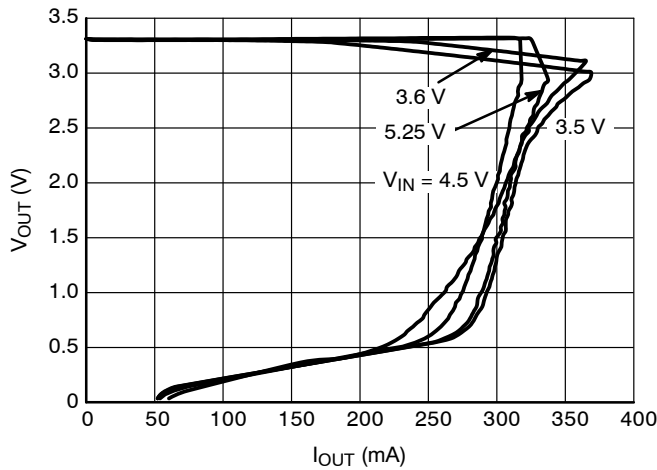


Figure 5. Output Voltage vs. Output Current  
3.3 V Version ( $T_J = 25^\circ\text{C}$ )

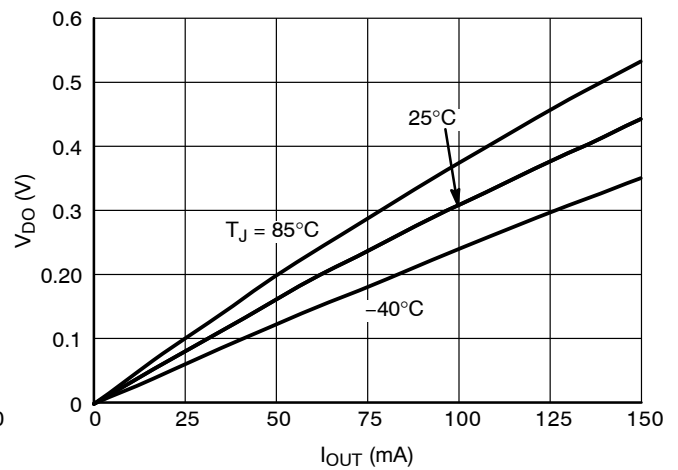


Figure 6. Dropout Voltage vs. Output Current  
1.5 V Version

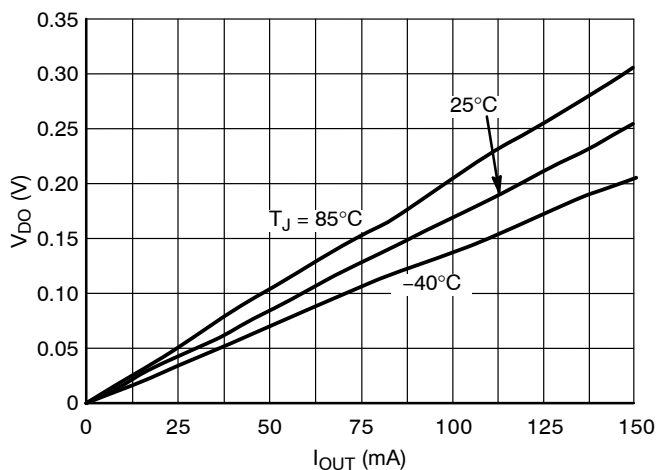


Figure 7. Dropout Voltage vs. Output Current  
2.5 V Version

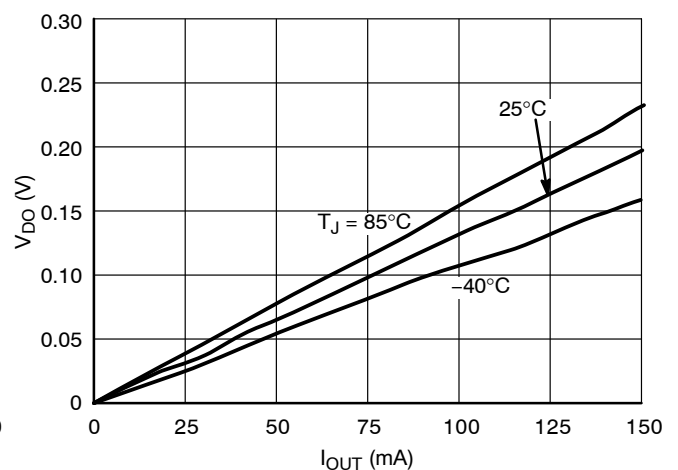


Figure 8. Dropout Voltage vs. Output Current  
3.3 V Version

TYPICAL CHARACTERISTICS

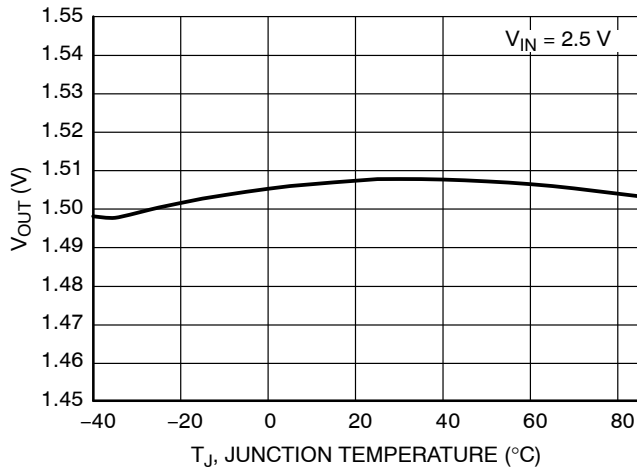


Figure 9. Output Voltage vs. Temperature, 1.5 V Version

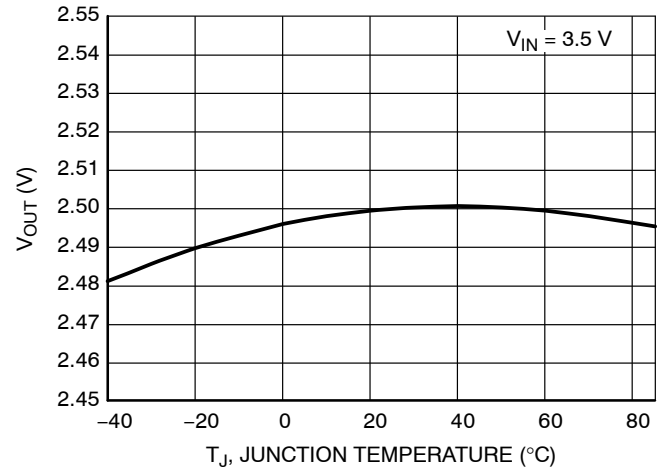


Figure 10. Output Voltage vs. Temperature, 2.5 V Version

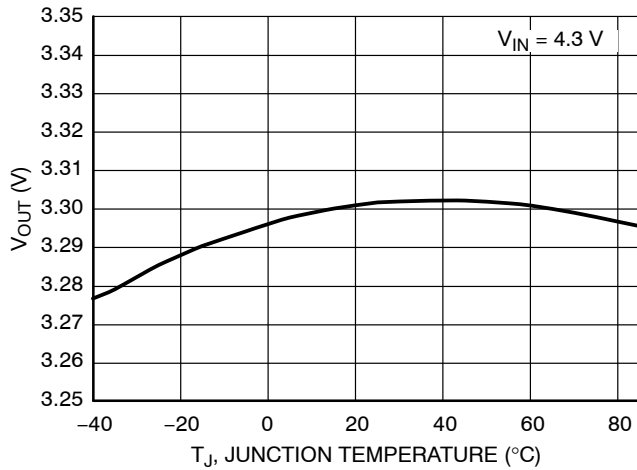


Figure 11. Output Voltage vs. Temperature, 3.3 V Version

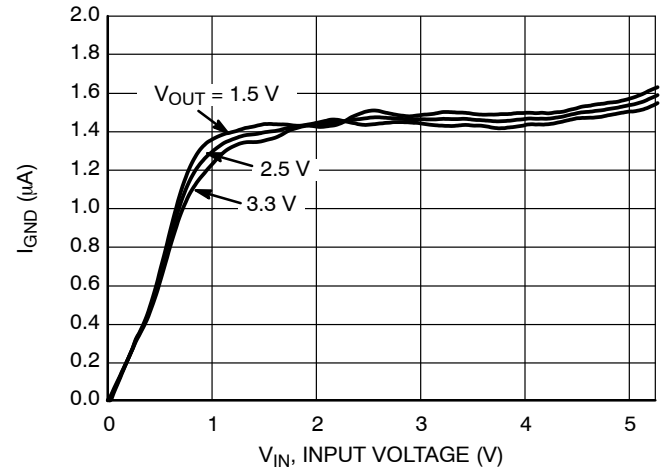


Figure 12. Supply Current vs. Input Voltage

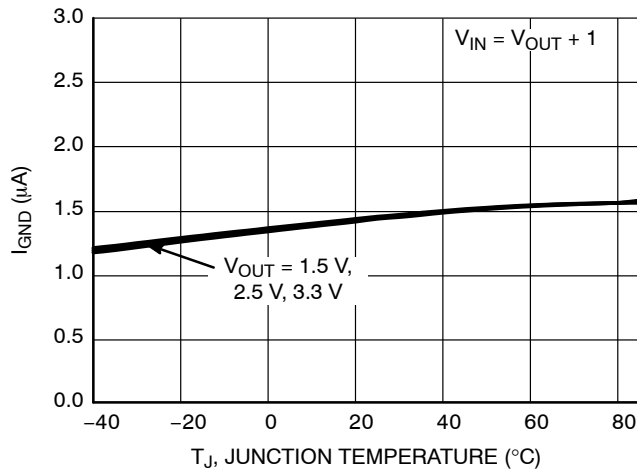


Figure 13. Supply Current vs. Temperature

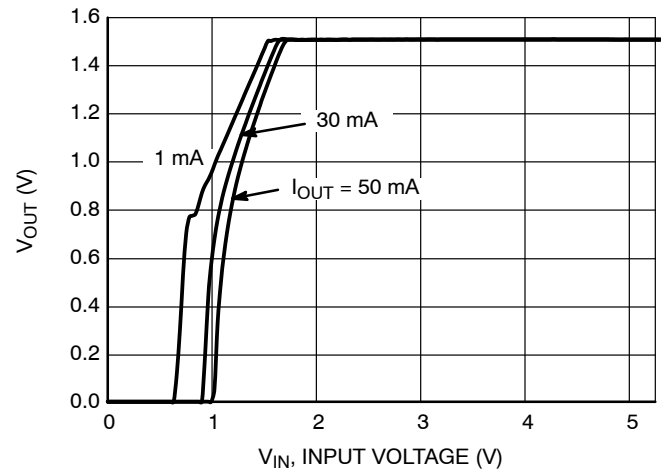


Figure 14. Output Voltage vs. Input Voltage, 1.5 V Version

TYPICAL CHARACTERISTICS

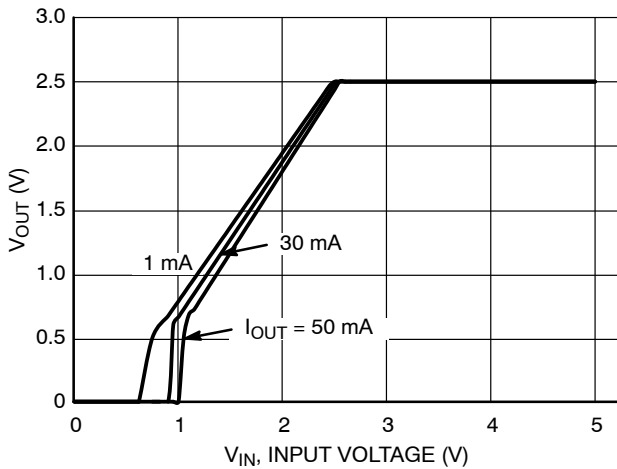


Figure 15. Output Voltage vs. Input Voltage, 2.5 V Version

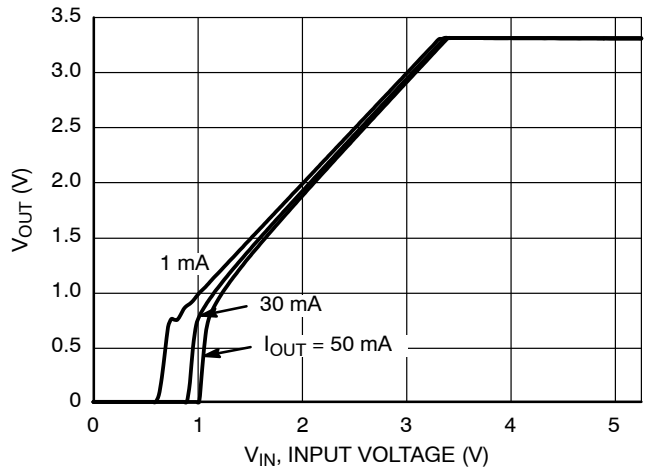


Figure 16. Output Voltage vs. Input Voltage, 3.3 V Version

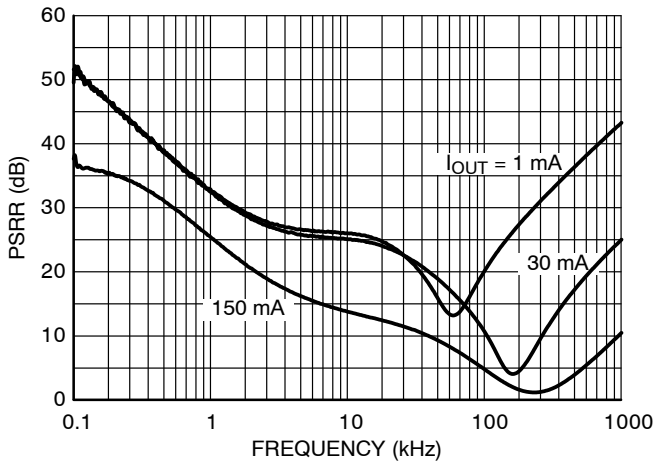


Figure 17. PSRR, 1.5 V Version,  $V_{IN} = 2.5$  V

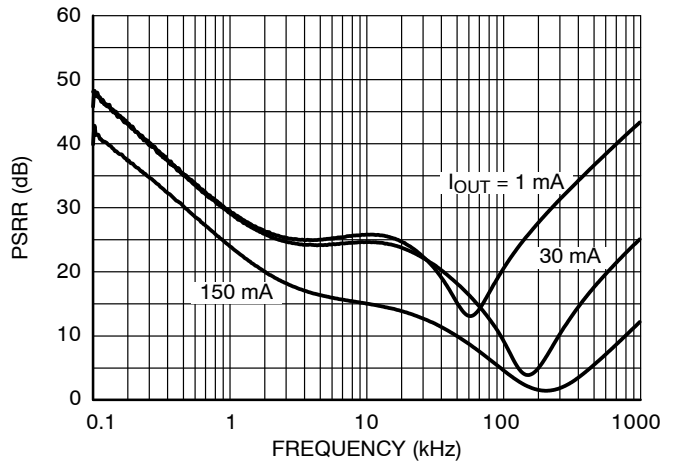


Figure 18. PSRR, 2.5 V Version,  $V_{IN} = 3.5$  V

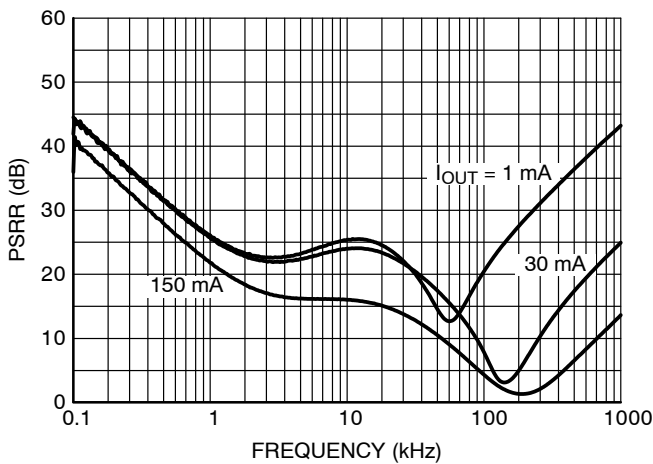


Figure 19. PSRR, 3.3 V Version,  $V_{IN} = 4.3$  V

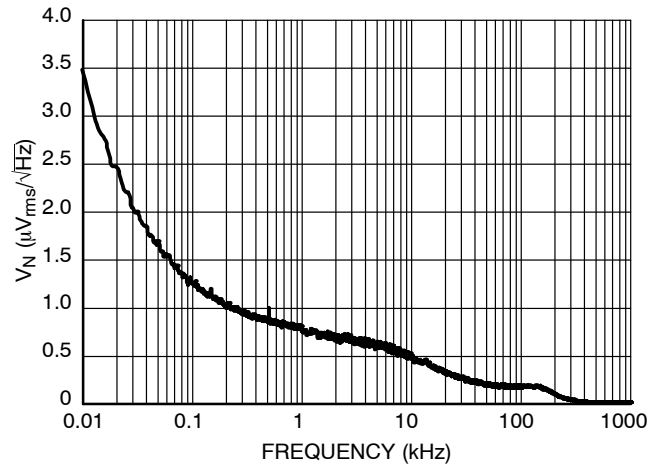


Figure 20. Output Voltage Noise, 1.5 V Version,  $V_{IN} = 2.5$  V,  $I_{OUT} = 30$  mA

TYPICAL CHARACTERISTICS

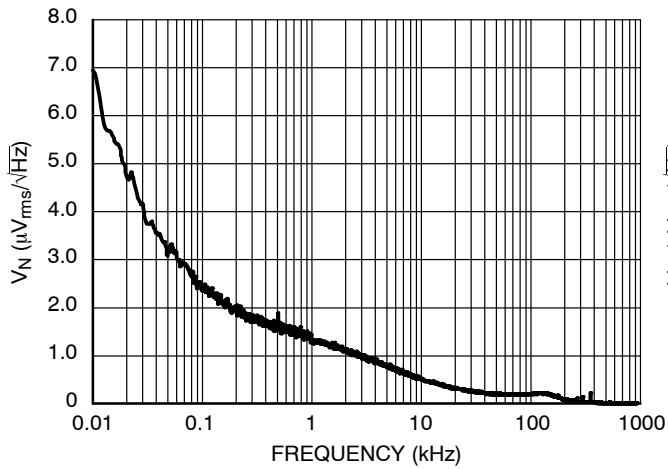


Figure 21. Output Voltage Noise, 2.5 V Version,  
 $V_{IN} = 3.5 V$ ,  $I_{OUT} = 30 mA$

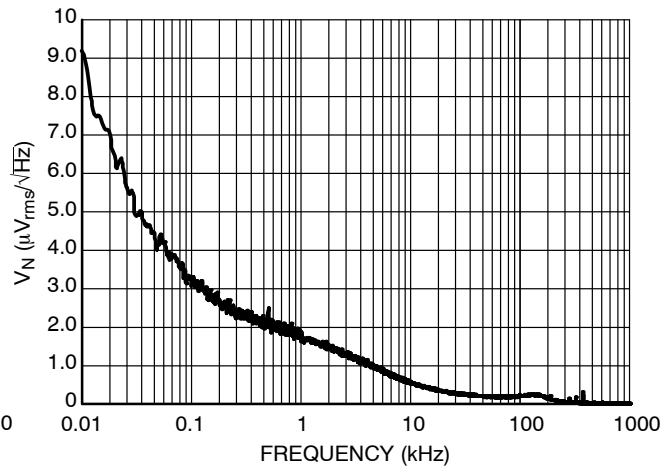


Figure 22. Output Voltage Noise, 3.3 V Version,  
 $V_{IN} = 4.3 V$ ,  $I_{OUT} = 30 mA$

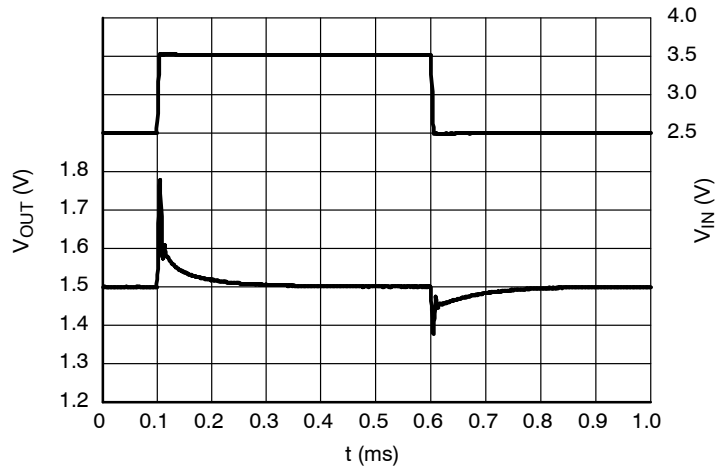


Figure 23. Line Transients, 1.5 V Version,  
 $t_R = t_F = 5 \mu s$ ,  $I_{OUT} = 30 mA$


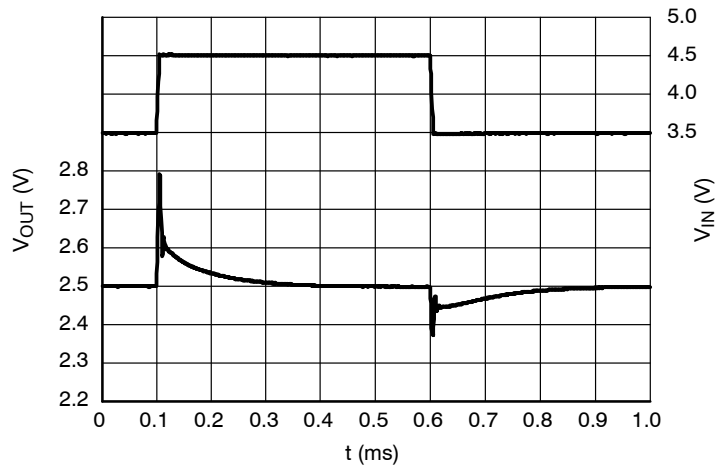


Figure 24. Line Transients, 2.5 V Version,  
 $t_R = t_F = 5 \mu s$ ,  $I_{OUT} = 30 mA$




# NCP4681, NCP4684


## TYPICAL CHARACTERISTICS

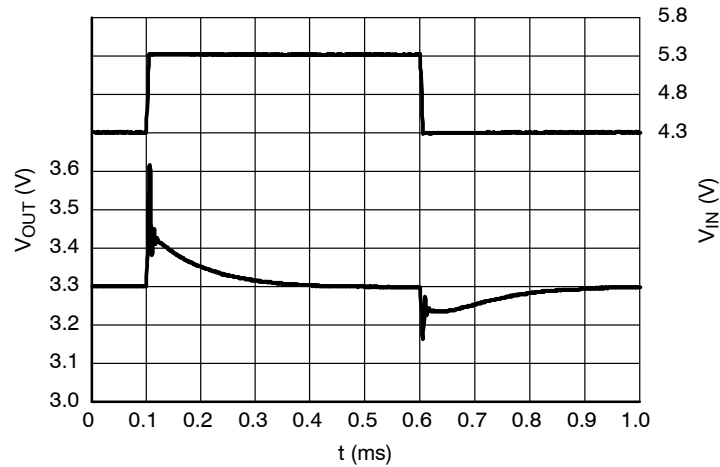

**Figure 25. Line Transients, 3.3 V Version,  
 $t_R = t_F = 5 \mu s$ ,  $I_{OUT} = 30$  mA**

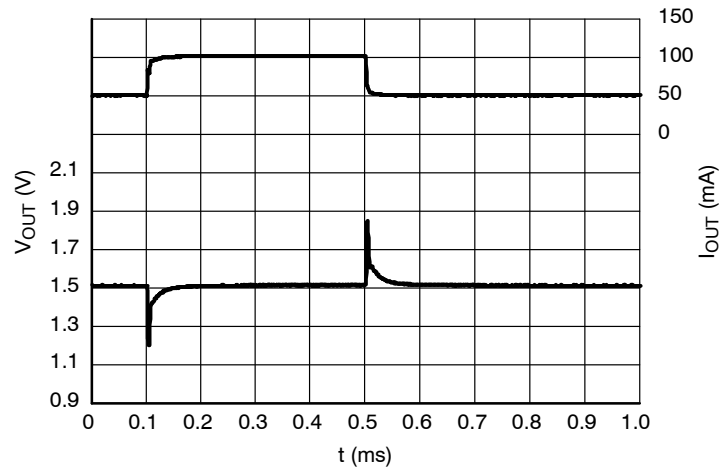


**Figure 26. Load Transients, 1.5 V Version,  
 $I_{OUT} = 50 - 100$  mA,  $t_R = t_F = 0.5 \mu s$ ,  $V_{IN} = 2.5$  V**

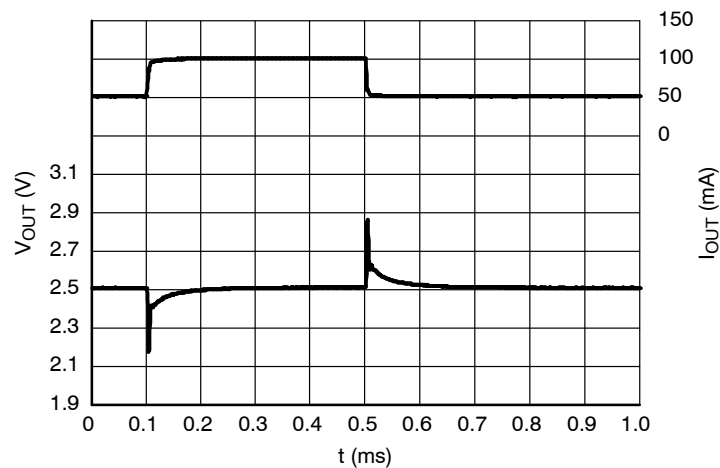


**Figure 27. Load Transients, 2.5 V Version,  
 $I_{OUT} = 50 - 100$  mA,  $t_R = t_F = 0.5 \mu s$ ,  $V_{IN} = 3.5$  V**


TYPICAL CHARACTERISTICS

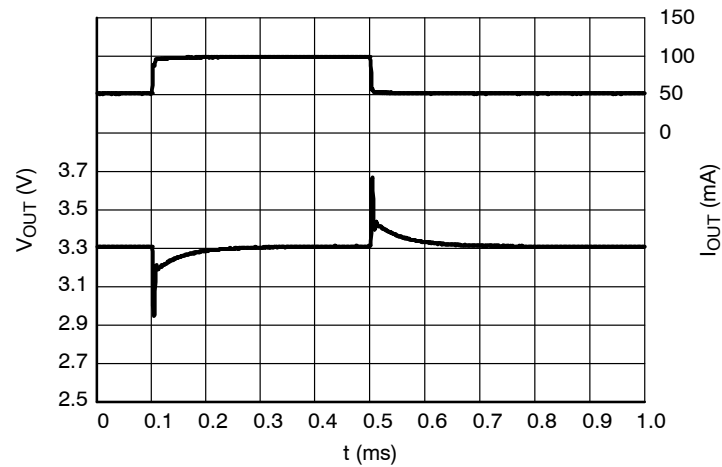

**Figure 28. Load Transients, 3.3 V Version,**  
 $I_{OUT} = 50 - 100 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 4.3 \text{ V}$

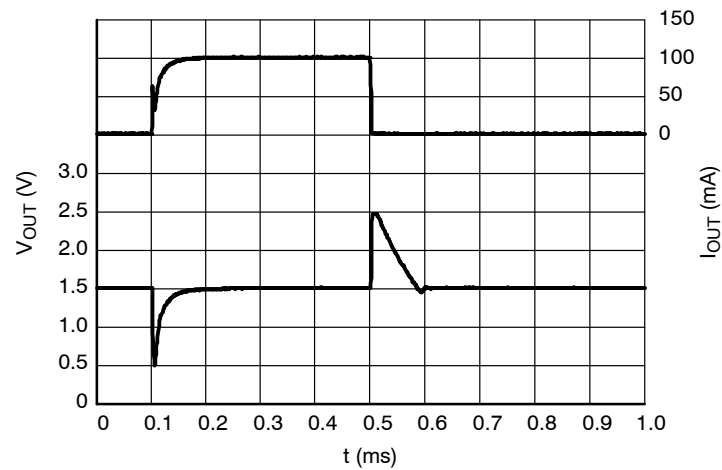


**Figure 29. Load Transients, 1.5 V Version,**  
 $I_{OUT} = 1 - 100 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 2.5 \text{ V}$

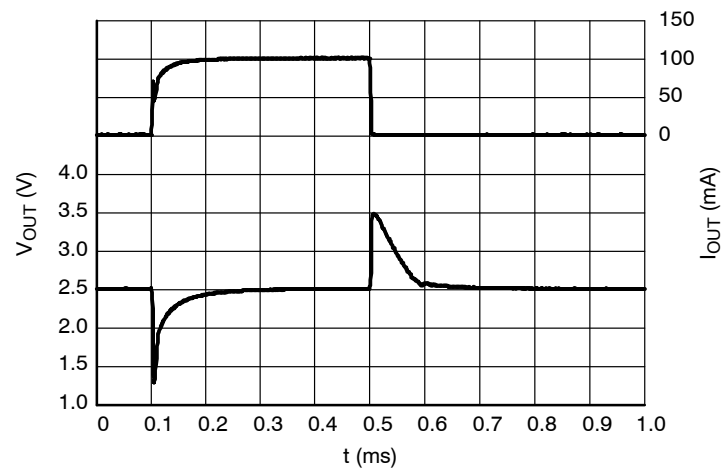


**Figure 30. Load Transients, 2.5 V Version,**  
 $I_{OUT} = 1 - 100 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 3.5 \text{ V}$

# NCP4681, NCP4684


## TYPICAL CHARACTERISTICS

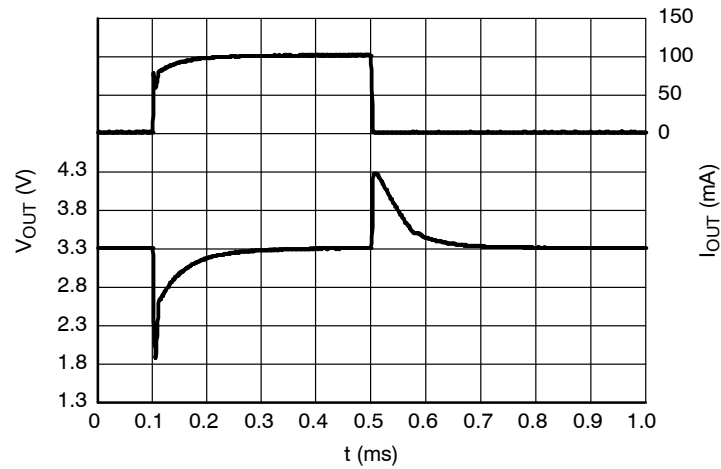

**Figure 31. Load Transients, 3.3 V Version,  
 $I_{OUT} = 1 - 100 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 4.3 \text{ V}$**

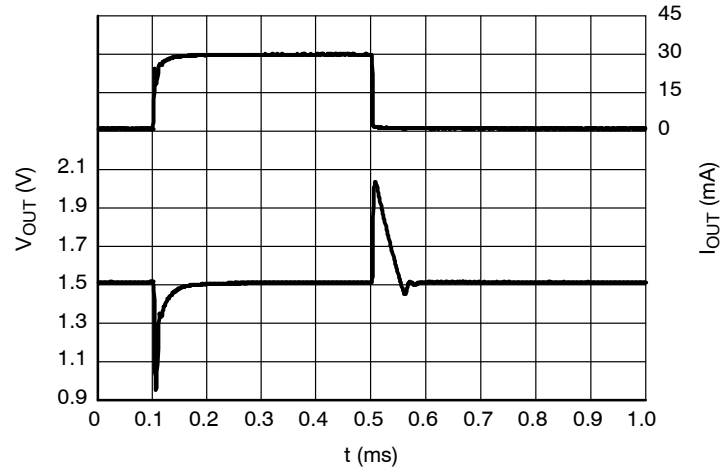


**Figure 32. Load Transients, 1.5 V Version,  
 $I_{OUT} = 1 - 30 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 2.5 \text{ V}$**

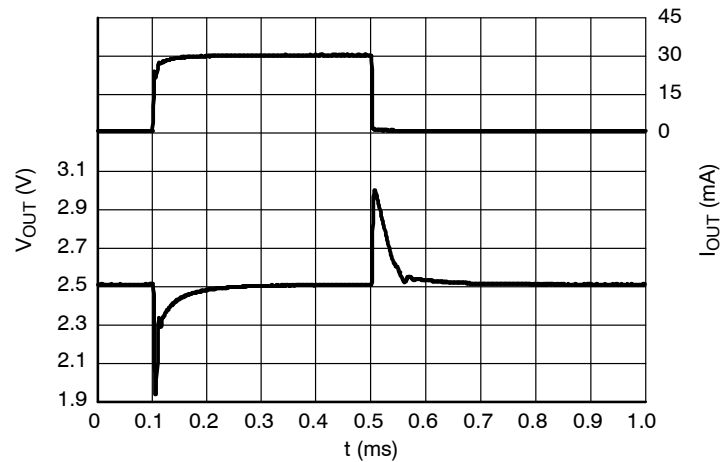


**Figure 33. Load Transients, 2.5 V Version,  
 $I_{OUT} = 1 - 30 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 2.5 \text{ V}$**

# NCP4681, NCP4684


## TYPICAL CHARACTERISTICS

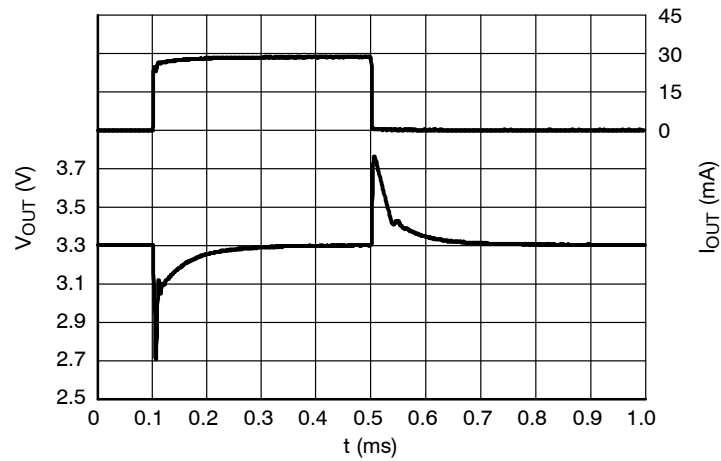

**Figure 34. Load Transients, 3.3 V Version,  
 $I_{OUT} = 1 - 30 \text{ mA}$ ,  $t_R = t_F = 0.5 \mu\text{s}$ ,  $V_{IN} = 4.3 \text{ V}$**

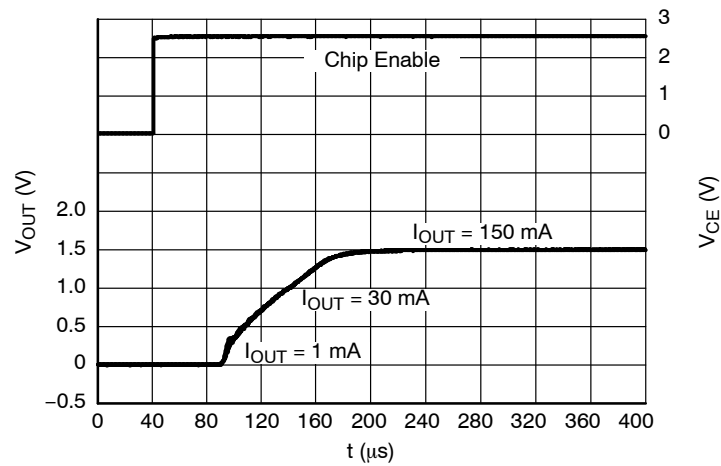


**Figure 35. Start-up, 1.5 V Version NCP4681x,  
 $V_{IN} = 2.5 \text{ V}$**

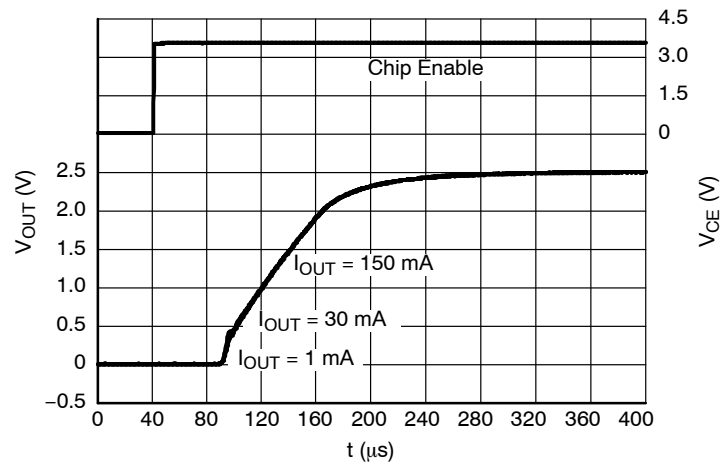


**Figure 36. Start-up, 2.5 V Version NCP4681x,  
 $V_{IN} = 3.5 \text{ V}$**

# NCP4681, NCP4684


## TYPICAL CHARACTERISTICS

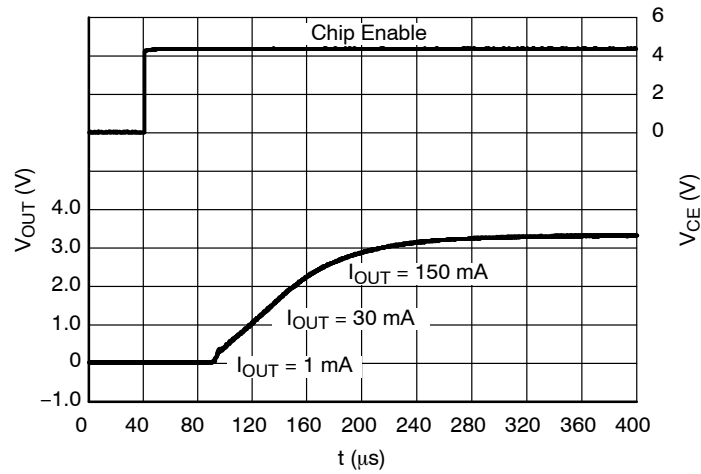

**Figure 37. Start-up, 3.3 V Version NCP4681x,  
 $V_{IN} = 4.3 \text{ V}$**

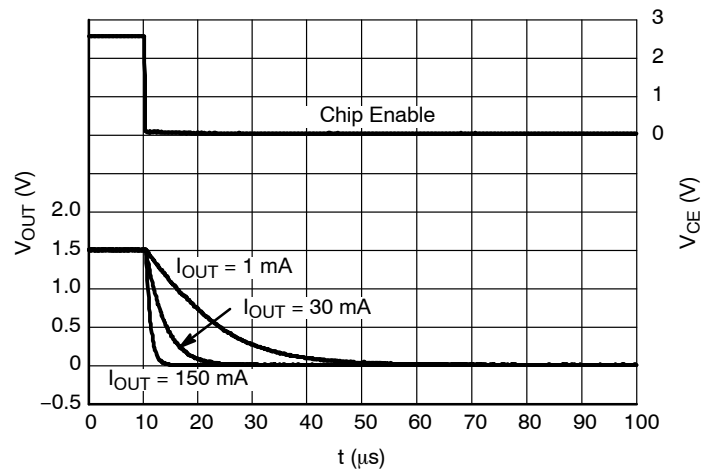

**Figure 38. Shutdown, 1.5 V Version NCP4681D,  
 $V_{IN} = 2.5 \text{ V}$**

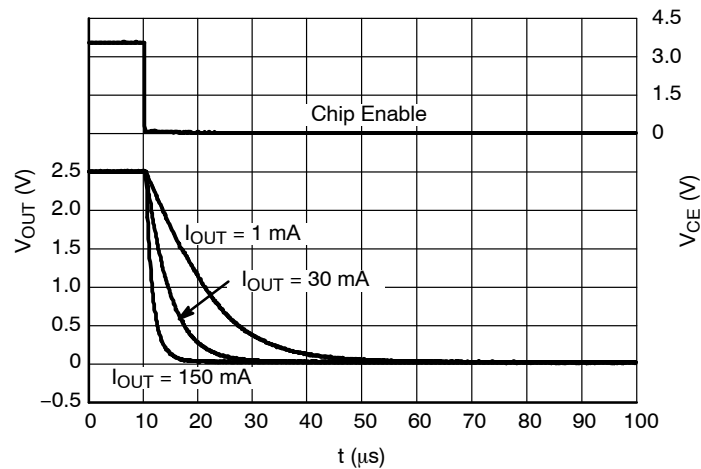

**Figure 39. Shutdown, 2.5 V version NCP4681D,  
 $V_{IN} = 3.5 \text{ V}$**

## TYPICAL CHARACTERISTICS

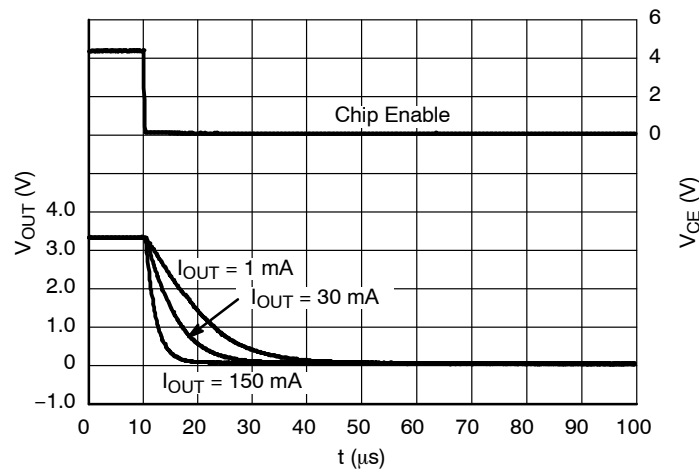


Figure 40. Shutdown, 3.3 V Version NCP4681D,  
 $V_{IN} = 4.3 \text{ V}$

## APPLICATION INFORMATION

A typical application circuits for NCP4681 and NCP4684 series are shown in Figure 41.

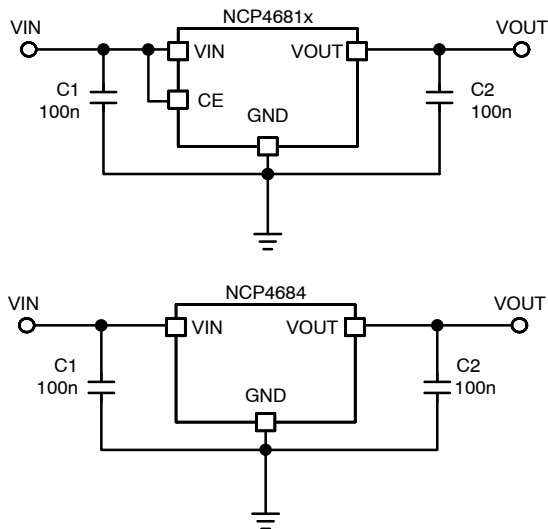


Figure 41. Typical Application Schematics

### Input Decoupling Capacitor (C1)

A 0.1  $\mu\text{F}$  ceramic input decoupling capacitor should be connected as close as possible to the input and ground pin of the NCP4681/4. Higher values and lower ESR improves line transient response.

### Output Decoupling Capacitor (C2)

A 0.1  $\mu\text{F}$  ceramic output decoupling capacitor is enough to achieve stable operation of the IC. If a tantalum capacitor is used, and its ESR is high, loop oscillation may result. The capacitors should be connected as close as possible to the

output and ground pins. Larger capacitor values and lower ESR improves dynamic parameters.

### Enable Operation (NCP4681 Only)

The enable pin CE may be used for turning the regulator on and off. The IC is switched on when a high level voltage is applied to the CE pin. The enable pin has an internal pull down current source. If the enable function is not needed connect CE pin to VIN.

### Constant Slope Circuit

The constant slope circuit is used as a soft start circuit that allows the output voltage to start up slowly with a defined slope. This circuit minimizes inrush current at start up and also prevents against overshoot of the output voltage. The Constant slope circuit is fully built in and no external components are needed. Start up time and the output voltage slope is defined internally and there is no way for the user to change it. Start up into bigger output capacitor doesn't make any problem due to cooperation of constant slope circuit and current limit circuit.

### Current Limit

This regulator includes a fold-back current limiting circuit. This type of protection doesn't limit output current up to specified current capability in normal operation, but when an over current situation occurs, the output voltage and current decrease until the over current condition ends. Typical characteristics of this protection scheme are shown in the Output voltage versus Output current graphs in the characterization section of this datasheet.

## NCP4681, NCP4684

### Output Discharger

The NCP4681D version includes a transistor between VOUT and GND that is used for faster discharging of the output capacitor. This function is activated when the IC goes into disable mode.

### Thermal

As power across the IC increase, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration

on the PCB, the board material, and also the ambient temperature affect the rate of temperature increase for the part. When the device has good thermal conductivity through the PCB the junction temperature will be relatively low in high power dissipation applications.

### PCB layout

Make the VIN and GND line as large as practical. If their impedance is high, noise pickup or unstable operation may result. Connect capacitors C1 and C2 as close as possible to the IC, and make wiring as short as possible.

### ORDERING INFORMATION

| Device          | Nominal Output Voltage | Description    | Marking    | Package            | Shipping <sup>†</sup> |
|-----------------|------------------------|----------------|------------|--------------------|-----------------------|
| NCP4681DMX29TCG | 2.9 V                  | Auto discharge | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |
| NCP4681DMX33TCG | 3.3 V                  | Auto discharge | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |
| NCP4681DMX35TCG | 3.5 V                  | Auto discharge | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |
| NCP4681HMX35TCG | 3.5 V                  | Enable high    | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |
| NCP4681DSQ15T1G | 1.5 V                  | Auto discharge | AQ15       | SC-70 (Pb-Free)    | 3000 / Tape & Reel    |
| NCP4681DSQ25T1G | 2.5 V                  | Auto discharge | AQ25       | SC-70 (Pb-Free)    | 3000 / Tape & Reel    |
| NCP4681DSQ28T1G | 2.8 V                  | Auto discharge | AQ28       | SC-70 (Pb-Free)    | 3000 / Tape & Reel    |
| NCP4681DSQ33T1G | 3.3 V                  | Auto discharge | AQ33       | SC-70 (Pb-Free)    | 3000 / Tape & Reel    |
| NCP4684EMX25TCG | 2.5 V                  | Without Enable | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |
| NCP4684EMX33TCG | 3.3 V                  | Without Enable | B (fixed)* | XDFN0808 (Pb-Free) | 10000 / Tape & Reel   |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*Marking codes for XDFN0808 packages are unified.




\*\*To order other package and voltage variants, please contact your ON Semiconductor sales representative.



SCALE 2:1

SC-88A (SC-70-5/SOT-353)  
CASE 419A-02  
ISSUE M

DATE 11 APR 2023

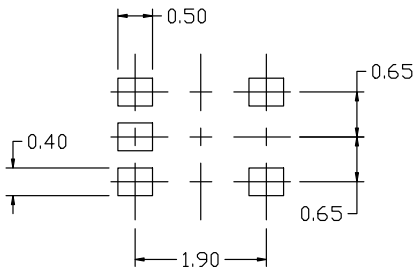

RECOMMENDED  
MOUNTING FOOTPRINT


\* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. 419A-01 OBSOLETE. NEW STANDARD 419A-02
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.1016MM PER SIDE.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.80        | 0.95 | 1.10 |
| A1  | ---         | ---  | 0.10 |
| A3  | 0.20 REF    |      |      |
| b   | 0.10        | 0.20 | 0.30 |
| c   | 0.10        | ---  | 0.25 |
| D   | 1.80        | 2.00 | 2.20 |
| E   | 2.00        | 2.10 | 2.20 |
| E1  | 1.15        | 1.25 | 1.35 |
| e   | 0.65 BSC    |      |      |
| L   | 0.10        | 0.15 | 0.30 |

GENERIC MARKING  
DIAGRAM\*



\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

XXX = Specific Device Code

M = Date Code

▪ = Pb-Free Package

(Note: Microdot may be in either location)

STYLE 1:

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

STYLE 2:

- PIN 1. ANODE
2. EMITTER
3. BASE
4. COLLECTOR
5. CATHODE

STYLE 3:

- PIN 1. ANODE 1
2. N/C
3. ANODE 2
4. CATHODE 2
5. CATHODE 1

STYLE 4:

- PIN 1. SOURCE 1
2. DRAIN 1/2
3. SOURCE 1
4. GATE 1
5. GATE 2

STYLE 5:

- PIN 1. CATHODE
2. COMMON ANODE
3. CATHODE 2
4. CATHODE 3
5. CATHODE 4

STYLE 6:

- PIN 1. EMITTER 2
2. BASE 2
3. EMITTER 1
4. COLLECTOR
5. COLLECTOR 2/BASE 1

STYLE 7:

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

STYLE 8:

- PIN 1. CATHODE
2. COLLECTOR
3. N/C
4. BASE
5. EMITTER

STYLE 9:

- PIN 1. ANODE
2. CATHODE
3. ANODE
4. ANODE
5. ANODE

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

|                  |                          |                                                                                                                                                                                  |
|------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42984B              | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SC-88A (SC-70-5/SOT-353) | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.










SCALE 4:1

XDFN4 0.8x0.8, 0.48P  
CASE 711AB  
ISSUE O

DATE 21 OCT 2010

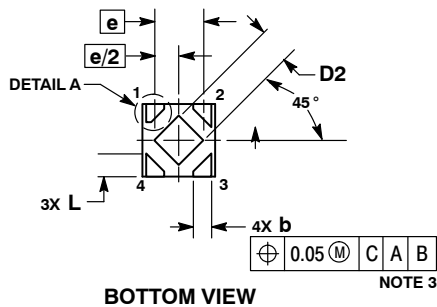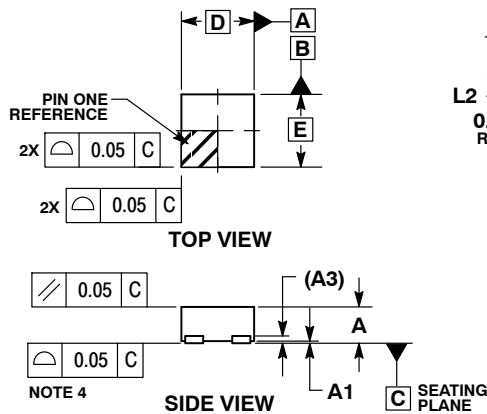

RECOMMENDED  
MOUNTING FOOTPRINT\*




DIMENSIONS: MILLIMETERS

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINALS.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | —    | 0.40 |
| A1          | 0.00 | 0.05 |
| A3          | 0.10 | REF  |
| b           | 0.17 | 0.27 |
| D           | 0.80 | BSC  |
| D2          | 0.20 | 0.30 |
| E           | 0.80 | BSC  |
| e           | 0.48 | BSC  |
| L           | 0.23 | 0.33 |
| L2          | 0.17 | 0.27 |
| L3          | 0.01 | 0.11 |

GENERIC  
MARKING DIAGRAM\*



X = Specific Device Code

MM = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "▪", may or may not be present.

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |                       |                                                                                                                                                                                     |
|------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON53252E           | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | XDFN4, 0.8X0.8, 0.48P | PAGE 1 OF 1                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)