

1.0 SCOPE

This specification documents the detail requirements for space qualified product manufactured on Analog Devices, Inc.'s QML certified line per MIL-PRF-38535 Level V except as modified herein.

The manufacturing flow described in the STANDARD SPACE LEVEL PRODUCTS PROGRAM brochure is to be considered a part of this specification. <http://www.analog.com/aerospace>

This data sheet specifically details the space grade version of this product. A more detailed operational description and a complete data sheet for commercial product grades can be found at www.analog.com/AD9731

2.0 Part Number. The complete part numbers per Table I of this specification follow:

<u>Part Number</u>	<u>Description</u>
AD9731-703D	10-bit, 170 MSPS, DAC
AD9731-713D	Radiation tested, 10-bit, 170 MSPS, DAC
AD9731-703F	10-bit, 170 MSPS, DAC
AD9731-713F	Radiation tested, 10-bit, 170 MSPS, DAC

2.1 Case Outline.

<u>Letter</u>	<u>Descriptive designator</u> ¹	<u>Case Outline (Lead Finish per MIL-PRF-38535)</u>
D	CDIP2-T28	28-Lead Ceramic Side Brazed DIP package
F	CDFP3-F28	28-Lead Ceramic Bottom Brazed Flatpack

¹ See MIL-STD-1835

3.0 Absolute Maximum Ratings. ($T_A = 25^\circ\text{C}$, unless otherwise noted)

+ V_S	+6V
- V_S	-7V
Analog Output.....	- V_S to + V_S
Digital Inputs	-0.7V to + V_S
Analog Output Current	30 mA
Control Amplifier Input Voltage Range	0V to -4V
Control Amplifier Output Current	± 2.5 mA
Reference Input Voltage Range	0V to - V_S
Operating Temperature Range	-55°C to +125°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.).....	+300°C
Maximum Junction Temperature (T_J).....	+150°C

ASD0011259

Rev. I

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective companies.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106,
U.S.A.

Tel: 781.329.4700

www.analog.com

Fax: 781.326.8703 © 2009 Analog Devices, Inc. All rights reserved.

3.1 Thermal Characteristics:

Thermal Resistance, SIDEBRAZED (D) Package

Junction-to-Case (Θ_{JC}) = 12 °C/W Max

Junction-to-Ambient (Θ_{JA}) = 40 °C/W Max

Thermal Resistance, BOTTOMBRAZED (F) Package

Junction-to-Case (Θ_{JC}) = 22 °C/W Max

Junction-to-Ambient (Θ_{JA}) = 66 °C/W Max

4.0 Electrical Table:

TABLE I						
Parameter See notes at end of table	Symbol	Conditions Note 1	Sub-group	Limit Min	Limit Max	Units
Differential Nonlinearity	DNL		1		1	LSB
			2, 3		1.5	
Integral Nonlinearity	INL		1		1	LSB
			2, 3		1.5	
Zero Scale Offset Error	IOS		1		70	μA
			2, 3		100	
Full Scale Gain Error (Note 2)	Ae		1, 2, 3		±5	% FS
Internal Reference Voltage	V _{REF}	I _{REF} = -50 μA to 500 μA	1	-1.35	-1.15	V
			2, 3	-1.37	-1.13	
Input Logic “1” Voltage	V _{IH}		1, 2, 3	2		V
Input Logic “0” Voltage	V _{IL}		1, 2, 3		0.8	
Input Logic “1” Current	I _{IH}		1, 2, 3		50	μA
Input Logic “0” Current	I _{IL}		1, 2, 3		100	
Positive Digital Supply Current	+I _{DIG}		1		20	mA
			2, 3		22	
Negative Digital Supply Current	-I _{DIG}		1		42	mA
			2, 3		47	
Negative Analog Supply Current	-I _{ANA}		1		53	mA
			2, 3		66	

NOTES:

- 1 +V_S = +5V, -V_S = -5.2V, Clock = 125 MHz, R_{SET} = 1.96 KΩ for 20.4 mA I_{OUT}, V_{REF} = -1.25V, unless otherwise specified.
- 2 Measured as an error in ratio of full-scale current to current through RSET (640 μA nominal); ratio is nominally 32. DAC load is virtual ground.

4.1 Electrical Test Requirements:

Table II	
Test Requirements	Subgroups (in accordance with MIL-PRF-38535, Table III)
Interim Electrical Parameters	1
Final Electrical Parameters	1, 2, 3 <u>1/</u> <u>2/</u>
Group A Test Requirements	1, 2, 3
Group C end-point electrical parameters	1 <u>2/</u>
Group D end-point electrical parameters	1
Group E end-point electrical parameters	1

1/ PDA applies to Subgroup 1. Deltas excluded from PDA


2/ See table III for delta parameters and limits.

4.2 Table III. Burn-in test delta limits.

Table III			
TEST TITLE	ENDPOINT LIMIT	DELTA LIMIT	UNITS
-I _{DIG}	42	±4.2	mA
I _{ANA}	53	±5.3	mA
+I _{DIG}	20	±2.0	mA
IOS	±70	±35	μA
Ae	±5.0	±2.0	%FS

AD9731

5.0 Package Pin-out:

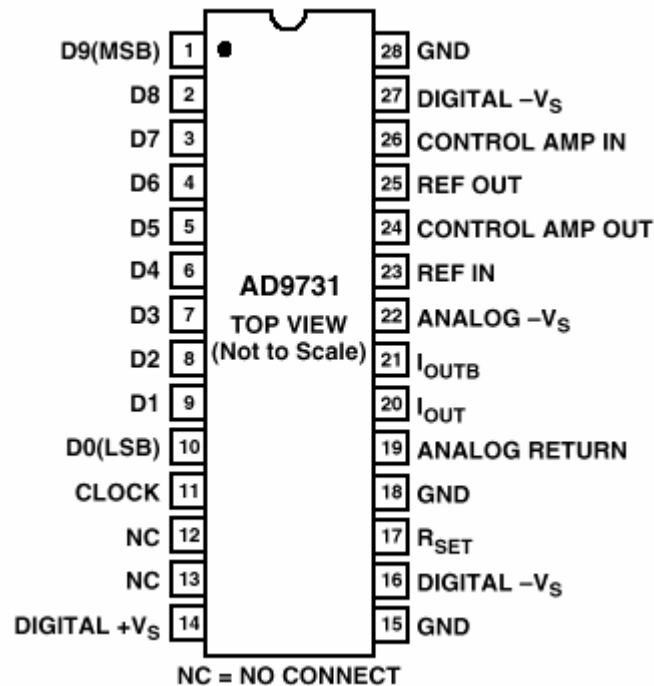

6.0 Microcircuit Technology Group: The microcircuit is covered by technology group 80.

7.0 Life Test/Burn-In Circuit: Steady state life test is per MIL-STD-883 Method 1005. Burn-in is per MIL-STD-883 Method 1015 test condition B.

8.0 MIL-STD-38535 QMLV exceptions:

8.1 Full WLA per MIL-STD-883 TM 5007 is not available for this product fabricated in a QMLQ wafer process facility. SEM Inspection only is available per MIL-STD-883, TM2018.

Rev	Description of Change	Date
A	Initiate	June 30, 2000
B	Delete output compliance from Table I - guaranteed by design	Nov. 28, 2000
C	Update paragraph 1.0, added web address	Feb. 7, 2002
D	Update web address.	Mar. 18, 2003
E	Delete Burn-In circuit.	Aug. 5, 2003
F	Add AD9731-703F & AD9731-713F (flatpack version)	Oct. 27, 2003
G	Clarify SEM vs. WLA availability for QMLQ fab process	Sep. 21, 2007
H	Update header/footer & add to 1.0 Scope description	Feb. 22, 2008
I	Add descriptive designator to 2.1- Case Outline	Aug. 18, 2009

