

PHOTOCOUPLERS

High performance and high functionality photocouplers for motor drive, current and voltage sensing and communication functions in a variety of packages.




RENESAS PHOTOCOUPPLERS CONTRIBUTE TO THE REALIZATION OF INDUSTRIAL SYSTEMS THAT ARE SAFE, EFFICIENT, AND ENVIRONMENTALLY FRIENDLY.



CONTENTS

Isolation Amplifiers, Communication Applications	04
New Package	04
IGBT Drive, IPM Drive	05
Application Examples	06
Product Lineup	08

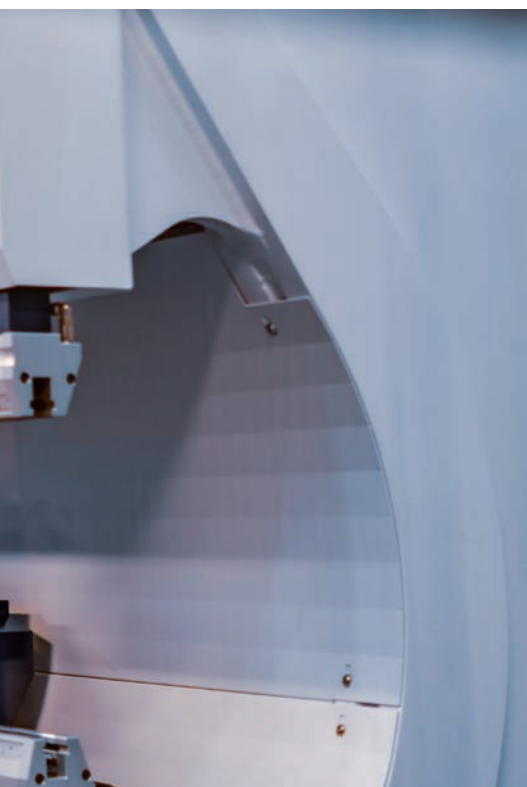

In manufacturing and industrial settings, photocouplers convey control signals while shielding persons and control systems from high voltages. Renesas photocouplers enable isolation of high voltages in solar and wind power generation systems, and in inverters that convert DC power to AC they enable accurate signal transfer and help improve power efficiency. The lineup includes products with integrated functionality for protecting the IGBTs used in inverter circuits. Also available are high-precision isolation amplifiers, for accurate voltage monitoring and motor control, and IC- or transistor-output products, which isolate microcontrollers and control devices while allowing high-speed signal transfer. Renesas photocoupler products deliver improved efficiency in manufacturing and industrial applications while contributing to safe and stable operation.

Isolation Amplifiers, Communication Applications

Δ - Σ Modulators, Isolation Amplifiers

RV1S9352A Δ - Σ Modulator/PS8352A Isolation Amplifier

Contributes to highly precise motor control with high precision and high input resistance.


(Δ - Σ Modulator & Very High Precision Isolation Amplifier)

•Contribution

Direct connection to RZ/T1 and RX72M

•Features

- High precision: Gain $\pm 0.5\%$ MAX.
- Effective Number of Bit (ENOB) 13.8 bits TYP.
- Input Offset Voltage Drift vs. Temperature $2.5 \mu\text{V}/^\circ\text{C}$ MAX.




•Contribution

High-precision feedback

•Features


- High precision: Gain $\pm 1\%$ MAX.
- High input resistance: 450 k Ω



Low Input current 15 Mbps


•Suitable for industrial equipment

due to the balance of low power, high speed 15 Mbps and high noise rejection

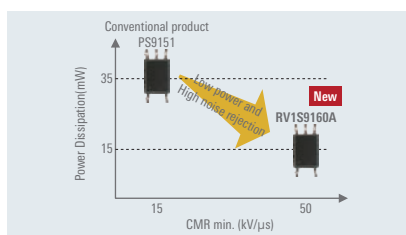

•The best package for each

application can be selected from various lineup



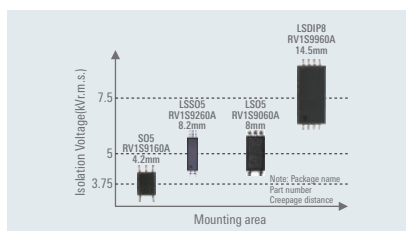


•Advantages

Compact I/O

•Features


- Low input
- 4-channel package (SSOP, common leads)



New Package

LSS05(5pin)/LSSOP(4pin)

- Downsizing while maintaining long creepage (35% reduction in mounting area compared to LS05)
- Lineup: 15 Mbps, IPM drive, Transistor output

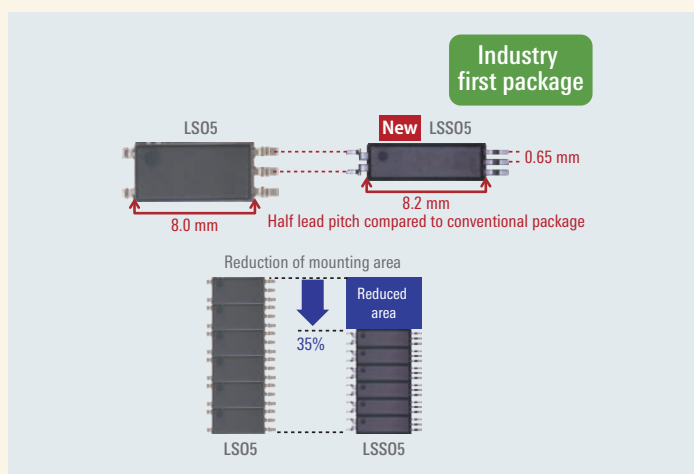

IGBT Drive, IPM Drive

IGBT Drive, IPM Drive

Reduced IGBT switching loss contributes to improved inverter efficiency, better real-time performance, and greater compactness.

- Advantages

IGBT on-off operation at high dv/dt


- Features

High CMR: $\pm 50 \text{ kV}/\mu\text{s}$, min.

High-temperature operation: $T_a = 125^\circ\text{C}$ max.


IGBT drive

PS9031, RV1S9231A




IPM drive

Active-low
(PS9013, RV1S9213A)



Active-high
(PS9009, RV1S9209A)



IGBT Drive with Protection Functions

PS9402 IGBT drive coupler with protection functions

Integrated peripheral functions for reduced board area
(IGBT gate driver with protection functions)

- Advantages


Lower design and board costs due to reduced need for external protection circuits and elimination of negative power supply

- Features

Two on-chip protection functions

- Desat (desaturation detection)

- Active Miller clamp



Desat


Protects the IGBT from damage from overcurrent.

(1) Detects rise in the collector voltage due to overcurrent.

(2) Softturn-off of Vout (IGBT gate).

(3) Fault feedback to the MCU.

(4) Operation recovery when IF input turns on again.

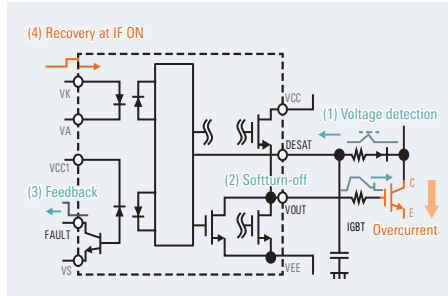


Active Miller clamp

Prevents short-circuit of upper and lower arms if IGBT turns on erroneously.

The displacement current (Miller current(1) *) when the upper arm turns on is drawn off by the clamp circuit(2), preventing erroneous on-switching.

* Current (ICG) that flows to the Miller capacitance between the collector and gate of the IGBT

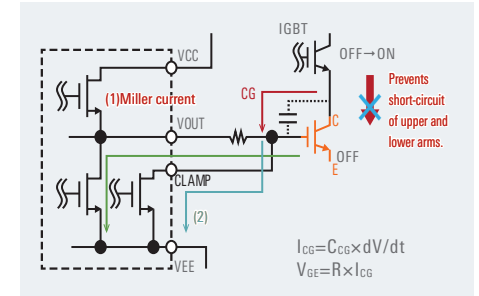

LSDIP

Advanced package for high-voltage systems

(Package with very long creepage of 14.5 mm)

- Features

First in industry with long creepage of 14.5 mm

High dielectric strength: 7.5 kV r.m.s.

High surge resistance: 12 kV allowable transient voltage

- Advantages


Less board space is needed to ensure isolation.

Enables smaller boards for large-capacity battery control.

Simplifies high-voltage feedback.


- Lineup

- PS9905 for IGBT drive
- PS9924 for 10 Mbps high-speed communication
- PS8902 for 1 Mbps analog

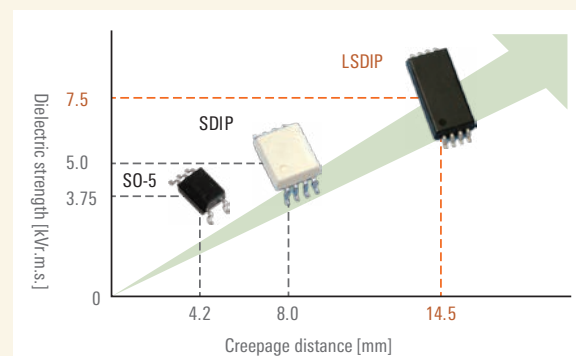


Application Examples


Motor Solution

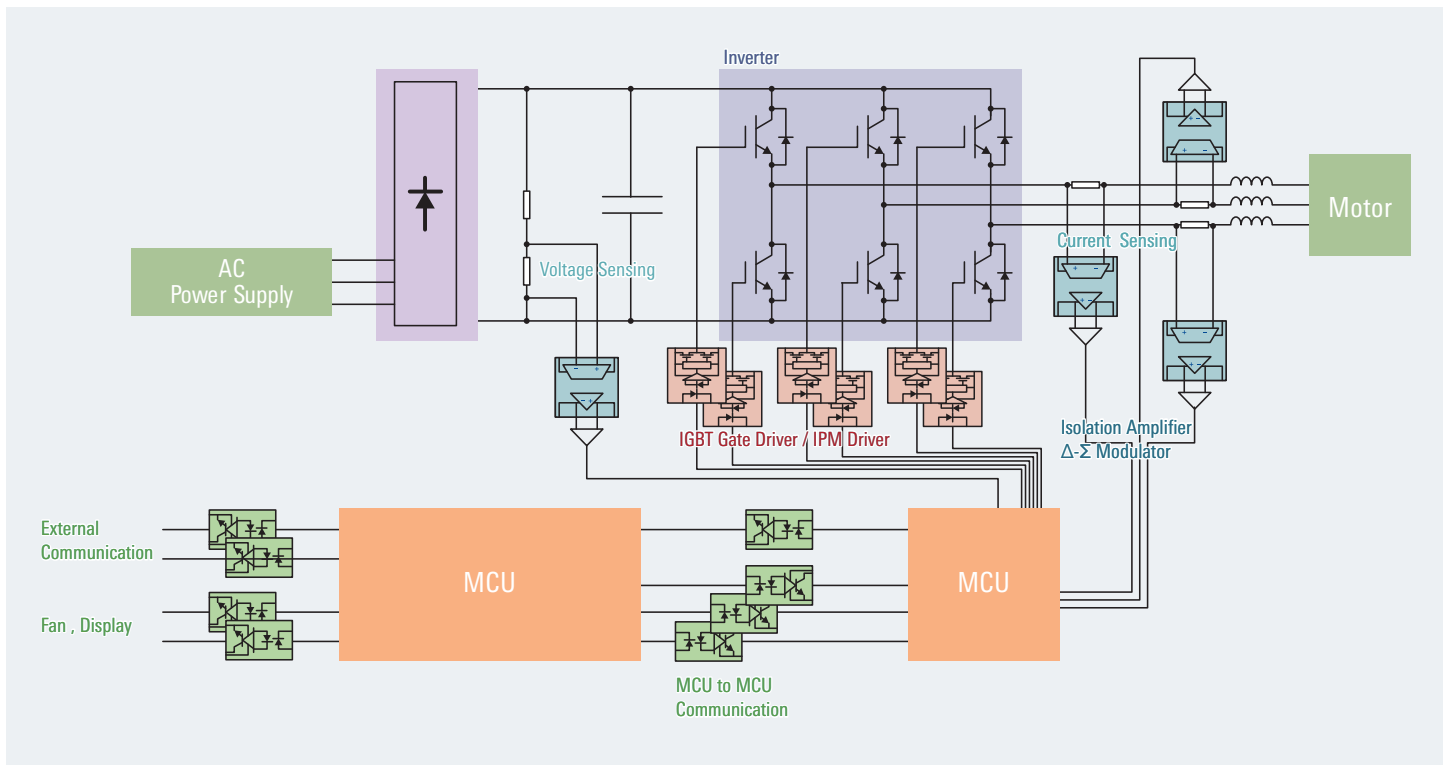


Power Control + Storage Battery

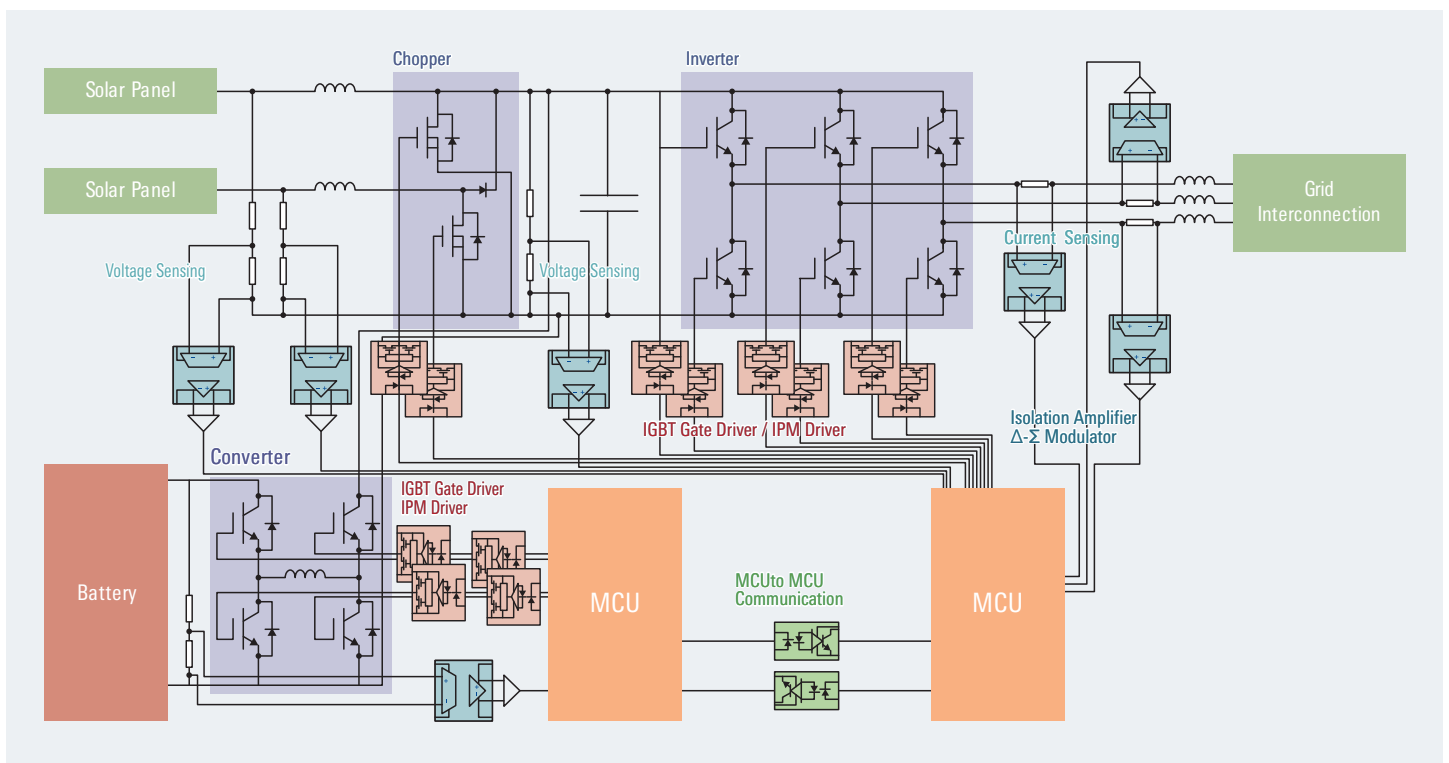

PLC

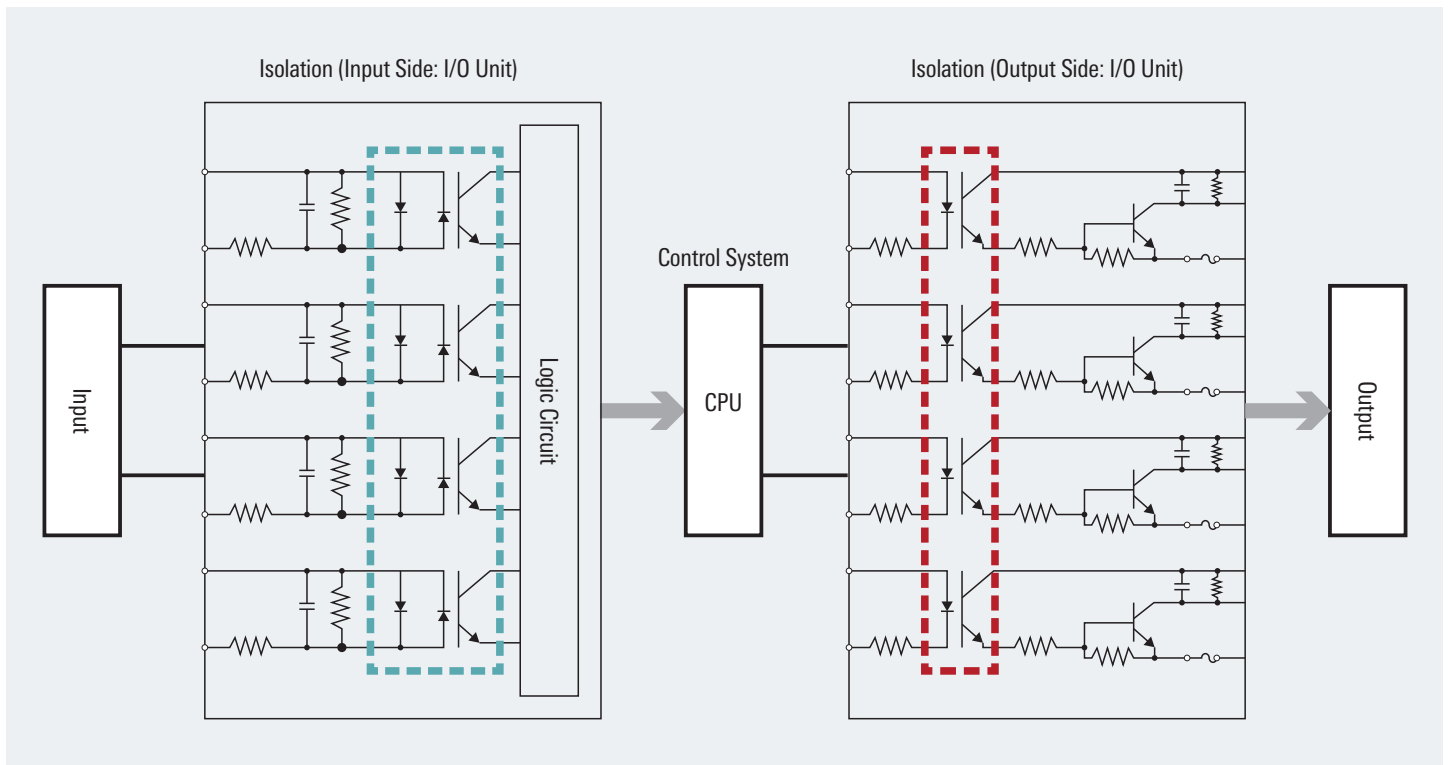


UPS

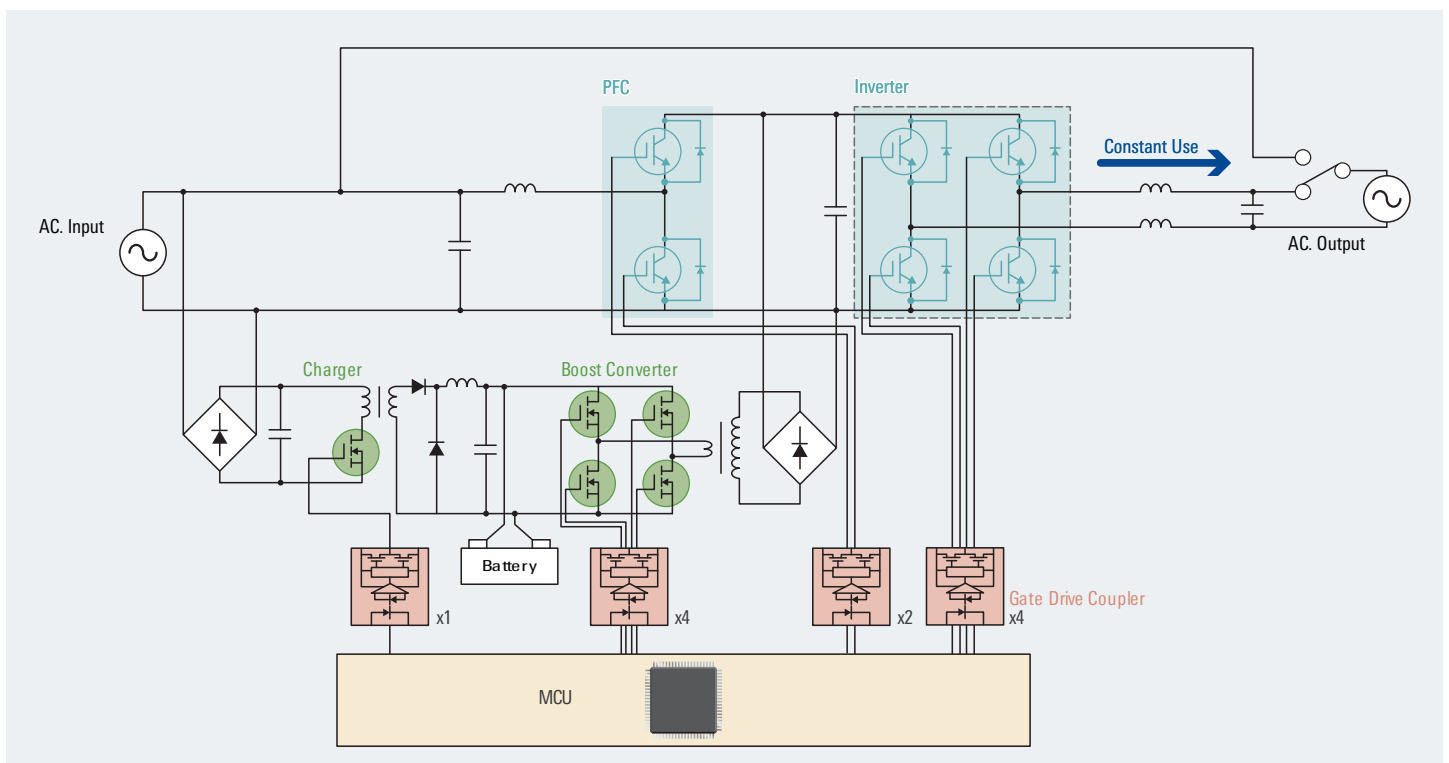

Product Lineup


The extensive lineup extends from high-speed products for motor drive of communication applications to general-purpose transistor-output products.

IC-Output

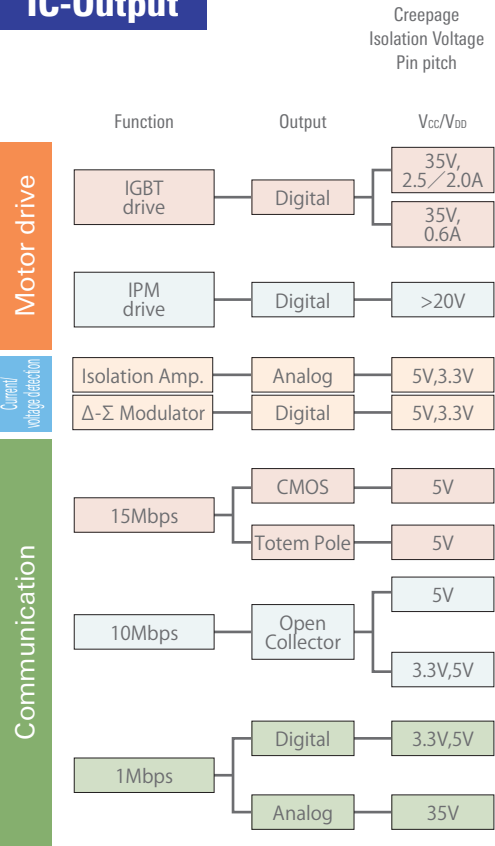

DIP8 7/8 mm 5 kV 2.54 mm	SDIP 7/8 mm 5 kV 1.27 mm	LSDIP8 14.5 mm 7.5 kV 1.27 mm	LS05 8 mm 5 kV 1.27 mm	S05 4.2 mm 3.75 kV 1.27 mm	LSS05 8.2 mm 5 kV 0.65 mm	S08 4 mm 2.5 kV 1.27 mm	S016 8 mm 5 kV 1.27 mm
PS9531	PS9331 PS9332	PS9905	PS9031		RV1S9231A		PS9402
PS9506	PS9307A				RV1S9207A		
PS9513	PS9313 PS9303 PS9309		PS9013 PS9009	PS9113	RV1S9213A RV1S9209A		
PS8551A	PS8352A						
PS9551A	PS9352A RV1S9353A						
	PS9351	RV1S9960A	RV1S9060A	PS9151 RV1S9160A	RV1S9260A	PS9851-1 PS9851-2	
				PS9123			
PS9587	PS9317		PS9001	PS9117A		PS9817A-1 PS9817A-2	
	PS9324	PS9924		PS9124		PS9821-1 PS9821-2	
				PS9122			
PS8501 PS8502	PS8302	PS8902		PS8101			

Transistor-Output

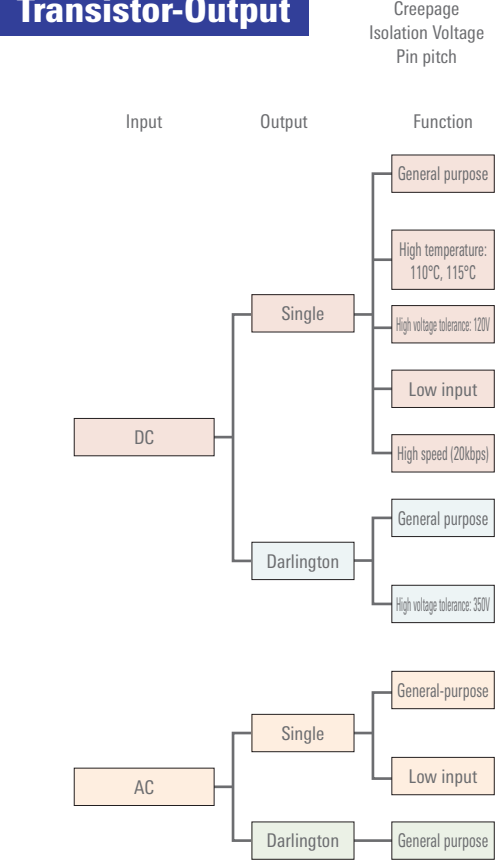

DIP4 7/8 mm 5 kV 2.54 mm	LSOP 8 mm 5 kV 2.54 mm	SOP 5 mm 3.75 kV 2.54 mm	LSSOP 8.2 mm 5 kV 1.3 mm	SSOP 4/4.5/5 mm 1.5/2.5/3.75 kV 0.8/1.27 mm	Flat lead 4 mm 2.5 kV 1.27 mm
		PS2701A-1		PS2801C-1/4	
PS2561D-1 PS2561F-1	PS2381-1	PS2761B-1	RV1S2281A	PS2861B-1	
		PS2703-1			
		PS2711-1	RV1S2211A	PS2811-1/4 PS2841-4A/4B	PS2911-1 PS2913-1
PS2514-1					
PS2562-1		PS2702-1		PS2802-1/4	
PS2533-1 PS2535-1		PS2733-1		PS2833-1/4	
PS2565-1		PS2705A-1	RV1S2285A	PS2805C-1/4	
		PS2715-1		PS2815-1/4 PS2845-4A	PS2915-1
PS2506-1		PS2706-1			

IGBT Drive

Function	Part No.	Output Peak Current [A]	Power Supply Voltage [V]	Package		Isolation Voltage [Vr.m.s.]	Ta max.	Electrical Characteristics					Protection Functions		
				Configu-ration	Creepage Distance [mm]			DC	SW				Protection		
								IFLH max. [mA]	tpHL,LH max. [ns]	PWD max. [ns]	PDD [ns]	CMR min. [kV/μs]	UVLO	Clamp	Desat
IGBT Drive	PS9307A	0.6	10 to 30	SDIP6	L:7 L2:8	5000	125	5.0	150	50	-80 to 80	50	○	—	—
	RV1S9207A			LSS05	8.2	5000	125	5.0	150	50	-80 to 80	50	○	—	—
	PS9506			DIP8	-/L3:7 L1/L2:8	5000	110	7.0	400	250	-300 to 300	25	—	—	—
	PS9031	2.5	15 to 30	LS05	8	5000	125	4.0	175	75	-90 to 90	50	○	—	—
	RV1S9231A			LSS05	8.2	5000	125	5.2	175	75	-90 to 90	50	○	—	—
	PS9331			SDIP6	L:7 L2:8	5000	125	4.0	175	75	-90 to 90	50	○	—	—
	PS9531			DIP8	-/L3:7 L1/L2:8	5000	125	4.0	175	75	-90 to 90	50	○	—	—
	PS9905			LSDIP8	14.5	7500	110	6.0	150	75	-100 to 100	25	○	—	—
	PS9332	2	15 to 30	SDIP8	L:7 L2:8	5000	125	4.0	200	75	-90 to 90	50	○	○	—
	PS9402	2.5	15 to 30	SO16	8	5000	110	5.0	200	100	-100 to 100	25	○	○	○

IPM Drive

Function	Part No.	Output Type	Logic	Package		Recommended Operating Conditions	Absolute Maximum Ratings		Electrical Characteristics				
									DC	SW			
				Configuration	Creepage Distance [mm]	Power Supply Voltage [V]	Isolation Voltage [Vr.m.s.]	Ta max. [°C]	IFHL/LH max. [mA]	tpHL/LH max. [ns]	PWD max. [ns]	PDD max. [ns]	CMR min. [kV/μs]
IPM Drive	PS9009	Totem Pole	Active High	LS05	8	4.5 to 20	5000	125	3.0	200	80	100	50
	RV1S9209A			LSS05	8.2	4.5 to 20	5000	125	3.8	200	80	100	50
	PS9309			SDIP6	L:7 L2:8	4.5 to 20	5000	110	3.0	200	80	80	15
	PS9303			SDIP6	L:7 L2:8	4.5 to 20	5000	100	5.0	500	350	—	15
	PS9513	Open Collector	Active Low	DIP8	-/L3:7 L1/L2:8	4.5 to 20	5000	100	5.0	500 750	650	650	15
	PS9013			LS05	8	4.5 to 25	5000	125	5.0	500 750	650	650	50
	RV1S9213A			LSS05	8.2	4.5 to 25	5000	125	5.0	500/750	650	650	50
	PS9313			SDIP6	L:7 L2:8	4.5 to 20	5000	110	5.0	500 750	650	650	15
	PS9113			S05	4.2	4.5 to 20	3750	100	5.0	500 750	650	650	15

Isolation Amplifiers

Function	Part No.	Output	Package		Absolute Maximum Ratings		Electrical Characteristics							
			Configuration	Creepage [mm]	Isolation Voltage [Vr.m.s.]	Ta max. [°C]	Input Voltage Linearity Range [mV]	Gain typ. [V/V]	Gain Error Max. [%]	NL typ. [%]	VDD2 [V]	CMR min. [kV/μs]	fc typ. [kHz]	Output Type
Isolation amplifier	PS8551A	Analog	DIP8	8	5000	105	-200 to 200	8	1	0.014	5	10	100	Differential
	PS8352A		SDIP8	8	5000	110	-200 to 200	8	1	0.014	5	10	100	Differential

Δ-Σ Modulators

Function	Part No.	Output	Package		Absolute Maximum Ratings		Electrical Characteristics						
			Configuration	Creepage [mm]	Isolation Voltage [Vr.m.s.]	Ta max. [°C]	Input Voltage Linearity Range [mV]	Gain Error Max.[%]	INL typ. [LSB]	VDD2 [V]	ENOB typ. [bits]	CMR min. [kV/μs]	fCLK typ. [MHz]
Δ-Σ Modulators	PS9551A	Digital	DIP8	8	5000	105	-200 to 200	1	3	5	12	15	10
	PS9352A		SDIP8	8	5000	110	-200 to 200	1	3	5	12	15	10
	RV1S9353A		SDIP8	8	5000	110	-200 to 200	0.5	3	3.3/5	13.8	15	10

High-Speed Communication (Analog)

Function	Part No.	Speed	Output Type	Absolute Maximum Rated Power Supply Voltage [V]	Package		Isolation Voltage [Vr.m.s.]	Ta max.	Electrical Characteristics						
					Configuration	Creepage [mm]			Detector				Coupled		
									IOH @Vcc30V max. [μA]	VOL max. [V]	ICCL typ. [μA]	ICCH max. [μA]	CTR IF 16mA Vcc 4.5V Vo 0.4V [%]	tpHL/LH max. [ns]	CMR min. [kV/μs]
High-Speed Communication (Analog)	PS8101	1M	Open Collector	35	S05	4.2	3750	100	100	0.4	50	2	15 to 35	800/1200	15
	PS8302				SDIP6	L:7 L2:8	5000	110	100	0.4	150	1	15 and Over	800/800	15
	PS8501				DIP8	-/L3:7 L1/L2:8	5000	100	100	0.4	150	1	15 and Over	800/800	-
	PS8502								100	0.4	150	1	15 and Over	800/800	15
	PS8902				LSDIP8	14.5	7500	110	100	0.4	50	2	15 to 35	800/1200	15

High-Speed Communication (Digital)

Function	Part No.	Speed	Output Type	Power Supply Voltage [V]	Package		Isolation Voltage [Vr.m.s.]	Ta max.	DC			AC				
					Configuration	Creepage Distance [mm]			VOL max. [V]	VOH min. [V]	ICCL/H max. [mA]	IFHL max. [mA]	tpHL/LH max. [ns]	PWD max. [ns]	tpsk max. [ns]	CMR min. [kV/μs]
High-Speed Communication (Digital)	PS9122	1M	Open Collector	N 2.7~3.6, L 4.5~5.5	S05	4.2	3750	100	0.6	—	3.5/2.5	5.0	500/700	200	—	15
	PS9822-1/-2				S08	4.0	2500	100	0.6	—	3.5/2.5	5.0	500/700	200	—	—
	PS9124				S05	4.2	3750	110	0.6	—	10/7	3.0	100/100	35	40	10
	PS9324	10M	Open Collector	2.7~3.6 & 4.5~5.5	SDIP6	L:7 L2:8	5000	110	0.6	—	10/7	3.0	100/100	35	40	15
	PS9924				LSDIP8	14.5	7500	110	0.6	—	10/7	5.0	100/100	35	40	15
	PS9821-1/-2				S08	4.0	2500	85	0.6	—	10/7	5.0	100/100	35	40	15
	PS9587			4.5~5.5	DIP8	-/L3:7 L1/L2:8	5000	85	0.6	—	11/8	5.0	100/100	50	60	15
	PS9317				SDIP6	L:7 L2:8	5000	85	0.6	—	10/7	5.0	75/75	35	40	15
	PS9001				LS05	8.0	5000	125	0.6	—	2/2	4.0	100/100	50	60	50
	PS9117A				S05	4.2	3750	85	0.6	—	10/7	5.0	100/100	35	40	15
	PS9817A-1/-2				S08	4.0	2500	85	0.6	—	10/7	5.0	100/100	35	40	15
	PS9123	15M	Totem Pole	4.5~5.5	S05	4.2	3750	100	0.6	2.4	10/7	5.0	60/60	30	—	15
	PS9151		CMOS	4.5~5.5	S05	4.2	3750	100	0.1	4.0	5/5	5.0	60/60	30	40	15
	RV1S9160A			2.7~5.5	S05	4.2	3750	125	0.1	VDD-0.1	2/2	2	60/60	20	25	50
	PS9851			4.5~5.5	S08	4.0	2500	100	0.1	4.0	5/5	6.0	60/60	30	40	10
	RV1S9060A			2.7~5.5	LS05	8	5000	125	0.1	VDD-0.1	2/2	2.2	60/60	20	25	50
	RV1S9260A			2.7~5.5	LSS05	8.2	5000	125	0.1	VDD-0.1	2/2	2.6	60/60	20	25	50
	PS9351			4.5~5.5	SDIP6	L:7 L2:8	5000	100	0.1	4.0	5/5	5.0	60/60	30	40	15
	RV1S9960A			2.7~5.5	LSDIP8	14.5	7500	110	0.1	VDD-0.1	2/2	3.8	60/60	20	25	50

Transistor-Output (DC Input) Single

Function	Part No.	Output Type	Package		Absolute Maximum Ratings				Electrical Characteristics				
			Configuration	Creepage [mm]	VCEO max.[V]	IC max. [mA]	Isolation Voltage [Vr.m.s.]	Ta max.	DC	SW			
									CTR %	tr typ. [μs]	tf typ. [μs]	ton typ. [μs]	toff typ. [μs]
Transistor-Output (DC Input)	PS2561D-1	Single	DIP4	~L:7 L1/L2:8	80	50	5000	110	50 to 400	3	5	—	—
	PS2561F-1		DIP4	7	80	50	5000	110	300 to 600	5	7	—	—
	PS2514-1		DIP4	7	40	20	5000	100	50 to 200	—	—	15	15
	PS2381-1		LSOP4	8	80	50	5000	115	50 to 400	4	5	—	—
	RV1S2281A		LSSOP	8.2	80	30	5000	115	50 to 400	4	5	—	—
	PS2701A-1		SOP4	5	70	30	3750	100	50 to 300	5	7	8	10
	PS2761B-1		SOP4	5	70	50	3750	110	50 to 400	4	5	8	5
	PS2703-1		SOP4	5	120	30	3750	100	50 to 400	10	10	13	11
	PS2711-1		SOP4	5	40	40	3750	100	100 to 400	4	5	—	—
	PS2801C-1		SSOP4	4.5	80	30	2500	100	50 to 400	5	7	10	7
	PS2801C-4		SSOP16	4.5	80	30	2500	100	50 to 400	5	7	10	7
	PS2861B-1		SSOP4	5	70	50	3750	110	50 to 300	4	5	5	5
	PS2811-1		SSOP4	4.5	40	40	2500	100	100 to 400	4	5	7	5
	PS2811-4		SSOP16	4.5	40	40	2500	100	100 to 400	4	5	7	5
	RV1S2211A		LSSOP	8.2	40	40	5000	115	100 to 400	4	5	—	—
	PS2841-4A		SSOP Common Leads	4	70	20	1500	100	100 to 400	—	—	20	110
	PS2841-4B		SSOP Common Leads	4	70	20	1500	100	100 to 400	—	—	20	110
	PS2911-1		Flat Leads	4	40	40	2500	100	100 to 400	5	10	40	120
	PS2913-1		Flat Leads	4	120	30	2500	100	50 to 200	10	10	80	50

Transistor-Output (DC Input) Darlington

Function	Part No.	Output Type	Absolute Maximum Ratings		Package		Isolation Voltage [Vr.m.s.]	Ta max. [°C]	Electrical Characteristics						
			VCEO [V]	IC [mA/ch]	Configuration	Creepage [mm]			DC			SW			
									CTR min. [%]	CTR max. [%]	VCE SAT [V]	tr typ. [μs]	tf typ. [μs]	ton typ. [μs]	toff typ. [μs]
Transistor-Output (DC Input)	PS2802-1	Darlington	40	90	SSOP4	4.5	2500	100	200	—	1.0	200	200	—	—
	PS2802-4			100	SSOP16	4.5	2500	100	200	—	1.0	200	200	—	—
	PS2562-1			200	DIP4	7	5000	100	200	—	1.0	100	100	—	—
	PS2702-1			200	SOP4	5	3750	100	200	—	1.0	70	60	90	60
	PS2833-1		350	60	SSOP4	4.5	2500	100	400	4500	1.0	20	5	—	—
	PS2833-4			60	SSOP16	4.5	2500	100	400	4500	1.0	20	5	—	—
	PS2535-1			120	DIP4	7	5000	100	400	5500	1.0	18	5	—	—
	PS2533-1			150	DIP4	7	5000	100	1500	6500	1.0	100	100	—	—
	PS2733-1			150	SOP4	5	2500	100	1500	—	1.0	100	100	—	—

Transistor-Output (AC Input)

Function	Part No.	Output Type	Package		Absolute Maximum Ratings				Electrical Characteristics				
			Configuration	Creepage [mm]	VCEO max. [V]	IC max. [mA]	Isolation Voltage [Vr.m.s.]	Ta max.	DC	SW			
									CTR %	tr typ. [μs]	tf typ. [μs]	ton typ. [μs]	toff typ. [μs]
Transistor-Output (AC Input)	PS2565-1	Single	DIP4	7	80	50	5000	100	80 to 400	3	5	—	—
	PS2705A-1		SOP4	5	70	30	3750	100	50 to 300	5	7	8	10
	PS2715-1		SOP4	5	40	40	3750	100	100 to 400	4	5	—	—
	PS2805C-1		SSOP4	4.5	80	30	2500	100	50 to 400	5	7	10	7
	PS2805C-4		SSOP16	4.5	80	30	2500	100	50 to 400	5	7	10	7
	PS2815-1		SSOP4	4.5	40	40	2500	100	100 to 400	4	5	7	5
	PS2815-4		SSOP16	4.5	40	40	2500	100	100 to 400	4	5	7	5
	RV1S2285A		LSSOP	8.2	80	30	5000	115	50 to 400	4	5	—	—
	PS2845-4A		SSOP Common Leads	4	70	20	1500	100	100 to 400	—	—	20	110
	PS2915-1		Flat Leads	4	40	40	2500	100	100 to 400	5	10	40	120
	PS2506-1	Darlington	DIP4	7	40	200	5000	100	200 min.	100	100	—	—
	PS2706-1		SOP4	5	40	200	3750	100	200 min.	200	200	—	—

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

SALES OFFICES

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics Corporation

TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

Renesas Electronics America Inc.

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 101-T01, Floor 1, Building 7, Yard No. 7, 8th Street, Shangdi, Haidian District, Beijing 100085, China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai 200333, China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit No 3A-1 Level 3A Tower 8 UOA Business Park, No 1 Jalan Pengaturcara U1/51A, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
Tel: +60-3-5022-1288, Fax: +60-3-5022-1290

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338