


Series 0925

Molded Shielded RF Coils

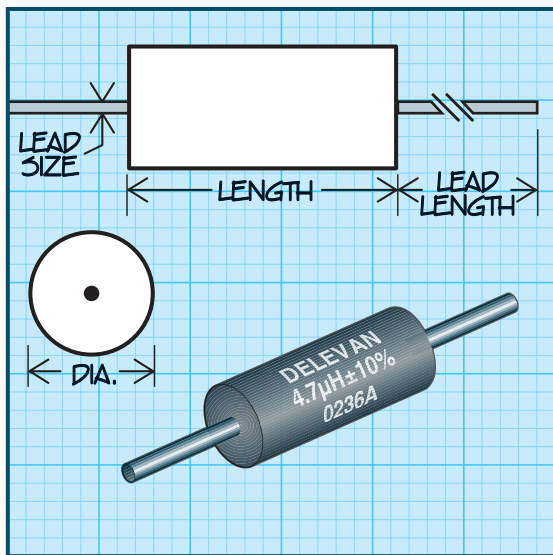

Military Specifications

MS21426 (LT10K); MS21427 (LT10K)

Physical Parameters

	Inches	Millimeters
Length	0.250 ± 0.010	6.35 ± 0.25
Diameter	0.095 ± 0.010	2.41 ± 0.25
Lead Size		
AWG #24 TCW	0.020 ± 0.0015	0.508 ± 0.038
Lead Length	1.5 ± 0.12	38.10 ± 3.05

Current Rating at 90°C Ambient 15°C Rise

Operating Temperature Range -55°C to +105°C

Maximum Power Dissipation at 90°C 0.0585 W

Weight Max. (Grams) 0.25

Incremental Current Current level which causes a Max. of 5% change in inductance.

Coupling 3% Max.

† Self Resonant Frequency (SRF) values are calculated and to be used for reference only.

Packaging Tape & reel: 12" reel, 3500 pieces max.; 14" reel, 6000 pieces max. For additional packaging options, see page 146.

Made in the U.S.A.

PART NUMBER	MIL DASH #	INDUCTANCE (µH) ±10%	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)	INCREMENTAL CURRENT (mA)
MS21426- SERIES 0925 IRON CORE & SLEEVE (LT10K)								
0925-101K	1	0.10	54	25.0	490.0†	0.10	670	670
0925-121K	2	0.12	52	25.0	430.0†	0.11	635	635
0925-151K	3	0.15	50	25.0	415.0†	0.12	610	610
0925-181K	4	0.18	49	25.0	375.0†	0.13	585	585
0925-221K	5	0.22	47	25.0	330.0†	0.15	545	545
0925-271K	6	0.27	46	25.0	300.0†	0.16	530	530
0925-331K	7	0.33	44	25.0	260.0†	0.18	495	495
0925-391K	8	0.39	42	25.0	230.0	0.19	485	485
0925-471K	9	0.47	41	25.0	220.0	0.21	460	460
0925-561K	10	0.56	41	25.0	210.0	0.23	440	440
0925-681K	11	0.68	39	25.0	180.0	0.24	430	430
0925-821K	12	0.82	38	25.0	165.0	0.27	405	405
0925-102K	13	1.00	37	25.0	150.0	0.30	385	385
0925-122K	14	1.20	40	7.9	130.0	0.73	247	247
0925-152K	15	1.50	41	7.9	115.0	0.86	228	228
0925-182K	16	1.80	43	7.9	105.0	0.95	217	217
0925-222K	17	2.20	45	7.9	95.0	1.10	202	202
0925-272K	18	2.70	48	7.9	90.0	1.20	193	193
0925-332K	19	3.30	49	7.9	80.0	1.30	185	185
0925-392K	20	3.90	50	7.9	75.0	1.50	173	173
0925-472K	21	4.70	53	7.9	70.0	2.40	136	136
0925-562K	22	5.60	54	7.9	60.0	2.90	124	124
0925-682K	23	6.80	55	7.9	55.0	3.20	118	118
0925-822K	24	8.20	55	7.9	53.0	3.60	111	111
0925-103K	25	10.0	57	7.9	50.0	4.00	106	106
0925-123K	26	12.0	36	2.5	35.0	3.00	122	122
0925-153K	27	15.0	38	2.5	30.0	3.40	115	115
0925-183K	28	18.0	40	2.5	26.0	3.80	108	108
0925-223K	29	22.0	40	2.5	24.0	4.90	96	96
0925-273K	30	27.0	40	2.5	21.0	5.80	88	88
0925-333K	31	33.0	41	2.5	20.0	6.50	83	83
0925-393K	32	39.0	42	2.5	19.0	7.90	75	75
0925-473K	33	47.0	44	2.5	16.0	9.30	69	69
0925-563K	34	56.0	44	2.5	15.0	11.0	64	64
0925-683K	35	68.0	45	2.5	13.0	12.0	61	61
0925-823K	36	82.0	45	2.5	11.0	13.0	59	59
0925-104K	37	100.0	40	2.5	10.5	16.8	51	51
MS21427- SERIES 0925 FERRITE CORE & SLEEVE (LT10K)								
0925-124K	1	120.0	31	0.79	13.0	5.80	88	27
0925-154K	2	150.0	33	0.79	12.0	7.90	75	24
0925-184K	3	180.0	33	0.79	11.0	9.40	69	22
0925-224K	4	220.0	35	0.79	10.0	11.0	64	20
0925-274K	5	270.0	37	0.79	9.0	12.0	61	18
0925-334K	6	330.0	40	0.79	8.0	16.0	53	16
0925-394K	7	390.0	38	0.79	7.8	21.0	46	14
0925-474K	8	470.0	36	0.79	7.5	24.0	43	13
0925-564K	9	560.0	36	0.79	7.0	28.0	40	12
Parts listed above are QPL/MIL qualified								
Optional Tolerances: J = 5% H = 3%								