



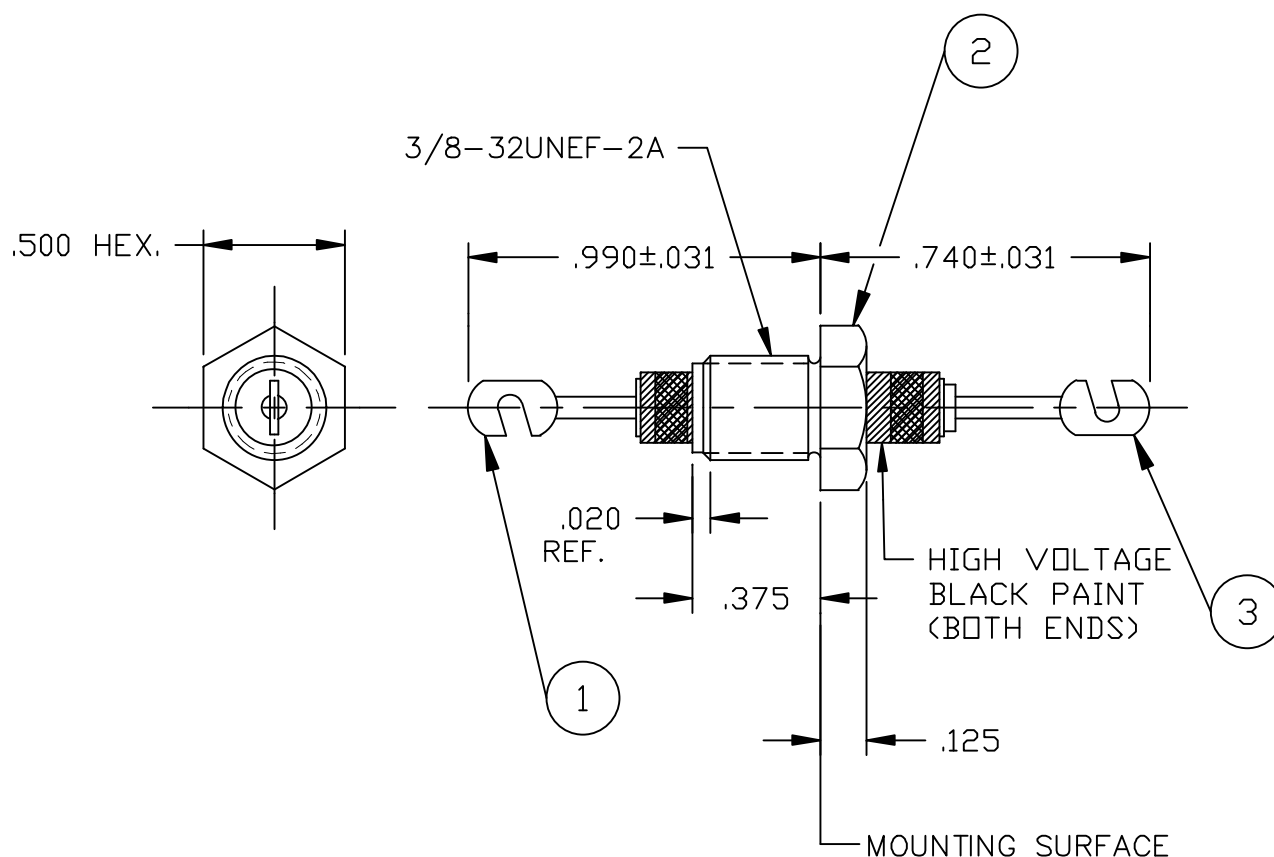

NOTES:

1. SUGGESTED MOUNTING HOLE = ϕ .386
2. HARDWARE IS INCLUDED.

TERMINAL FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	1500pF
TEMP. RANGE	-55°C TO 125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	125VAC/400 Hz DB 125°C: 2500VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	--
10	5
100	50
1 GHz	50
10 GHz	50

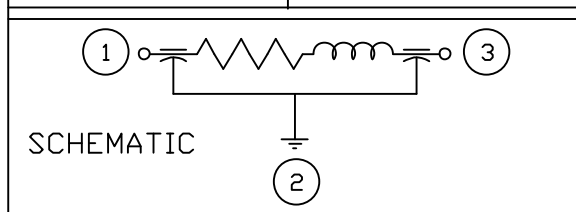

MARKING:

PART: SCI 1280-060 2500VDC
PACKAGE:

SCI


1280-060

DATE CODE

LOT NO.

QTY./PACK

(BUBBLE PACK) NOTE: SILVER PAPER
TO COVER ALL UNITS.

	8	7	6	5	4	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA	
	cn 40128-ENG	cn 207017	cn 184551	CN. 177404	CN. 163020	CHANGE NOTICE	Fractions $\pm$ 1/64		Dwn. KAUFFMAN	Description Pi
							Dec. .xx $\pm$		Ckd. 5/7/02	HIGH VOLTAGE FILTER
							Dec. .xxx $\pm$.010		Apvd.	
							Angles $\pm$ 0° 30'		Scale NONE	1280-060
							CODE IDENT. NO. 0LSP2			

