
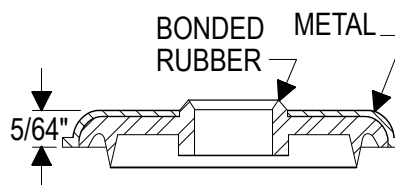


## Specifications

<b>Material:</b>	Standard Seeloc® washer is stainless steel, but can be made in carbon steel, nickel-plated brass, aluminum, etc. Silicone rubber is standard.
<b>Temp. Range:</b>	-160°F to 500°F
<b>Pressure Range:</b>	exceeds 100 psi internal and external
<b>Shelf Life:</b>	in excess of 25 years
<b>Resistant to:</b>	salt water, acids, weather, sunlight, ozone, etc.
<b>Installation:</b>	Seeloc® washers are installed on bolts or screws in the same manner as regular washers. The rubber section should always face the panel.
<b>Rating:</b>	IP66/68. UL Recognized for Type 4X & Type 6 enclosure protection

PART NO.	FOR THREAD SIZE	WASHER O.D.	Max. Hole Size (inch/mm)	Tightening Torque (lb-in)
75601	#6	1/2"	1/4 / 6.35	9-11
75801	#8	1/2"	1/4 / 6.35	16-22
75101	#10	1/2"	1/4 / 6.35	20-35
75602	#6	1"	3/8 / 9.53	9-11
75802	#8	1"	5/8 / 15.87	16-22
75102	#10	1"	5/8 / 15.87	20-35
75082	1/4	1"	5/8 / 15.87	60-80
75107	5/16	1"	5/8 / 15.87	120-145
75122	3/8	1"	5/8 / 15.87	145-160
75142	7/16	1"	5/8 / 15.87	300-350
75162	1/2	1"	5/8 / 15.87	400-530
75603	#6	1-1/2"	1/2 / 12.7	9-11
75803	#8	1-1/2"	1 / 25.4	16-22
75103	#10	1-1/2"	1 / 25.4	20-35
75083	1/4	1-1/2"	1 / 25.4	60-80
75108	5/16	1-1/2"	1 / 25.4	120-145
75123	3/8	1-1/2"	1 / 25.4	145-160
75143	7/16	1-1/2"	1 / 25.4	300-350
75163	1/2	1-1/2"	1 / 25.4	400-530

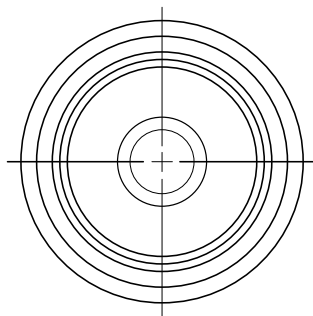

				7-8-06
A	CAD COMPUTER GENERATED			12-23-02
REV.	DESCRIPTION			DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.		TITLE: SEELOC®, VIBRATION-RESISTANT, SELF-SEALING WASHERS	ENG.	
			DWN.	
			CHKD.	
MAT'L: AS NOTED		APM-HEXSEAL CORPORATION	SCALE	DWG. NO. SW-100
FINISH: AS NOTED				

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.  
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.