



Series 505 PLCC to PGA Adapter for JEDEC Type .050 [1.27] Pitch Devices

FEATURES:


- Convert surface mount PLCC packages to a PGA footprint.
- Optional open frame allows for more efficient utilization of board space and better cooling.
- Pin polarization option also available.
- Consult factory for panelized form or for mounting of con-signed chips.

SPECIFICATIONS:

- Adapter body is FR-4, .062 [1.58] thick, with 1 ounce mini-mum Copper traces.
- Pads are hot-air solder leveled.
- Pins are Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Pin plating is 200 μ [5.08 μ m] min. Tin per MIL-T-10727 Type 1 or Tin/Lead 90/10 MIL-P-81728 over 100 μ [2.54 μ m] Nickel per QQ-N-290. Optional 10 μ [.25 μ m] Gold plating also available.
- Operating temperature=221°F [105°C].

MOUNTING CONSIDERATIONS:


- Suggested PCB hole size=.028 \pm .003 [.71 \pm .08] dia.
- Will plug into standard PGA sockets.

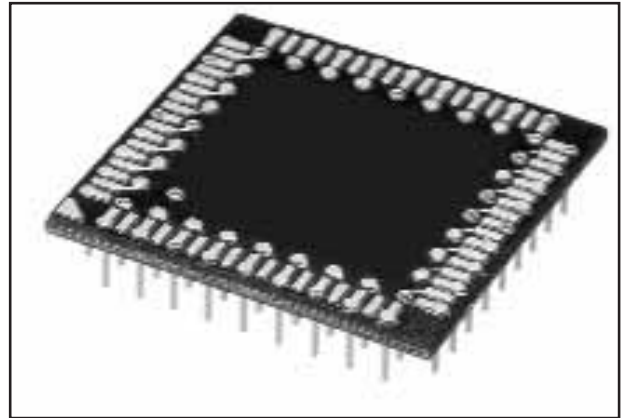

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.


ORDERING INFORMATION

XX-505-11XX

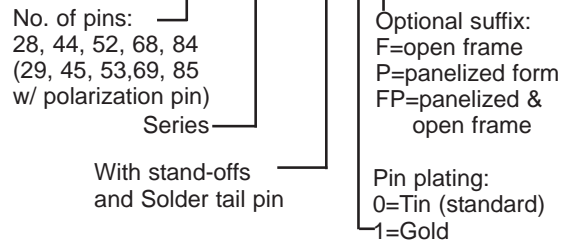


ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances \pm .005 [.13] unless otherwise specified

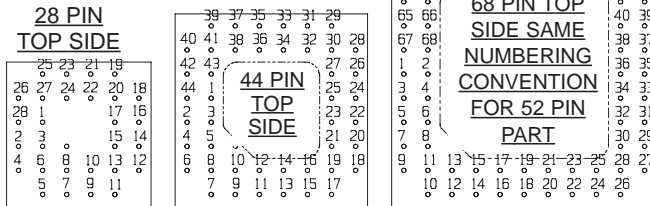

No of Pins	Dim. "A"	Dim. "B"	Dim. "C"	Dim. "D"	Dim. "E"	Matching PGA Part No.
28 or 29	.600 [15.24]	.500 [12.70]	.448 [11.38]	.324 [8.23]	N/A	29-PGM06002-30
44 or 45	.800 [20.32]	.700 [17.78]	.648 [16.46]	.524 [13.31]	.400 [10.16]	44-PGM08002-30
52 or 53	.875 [22.22]	.775 [19.68]	.760 [19.30]	.625 [15.58]	N/A	52-PGA09018-30
68 or 69	1.100 [27.94]	1.000 [25.40]	.948 [24.08]	.824 [20.93]	.700 [17.78]	68-PGM11032-30
84 or 85	1.300 [33.02]	1.200 [30.48]	1.148 [29.16]	1.024 [26.01]	.800 [20.32]	84-PGM13042-30

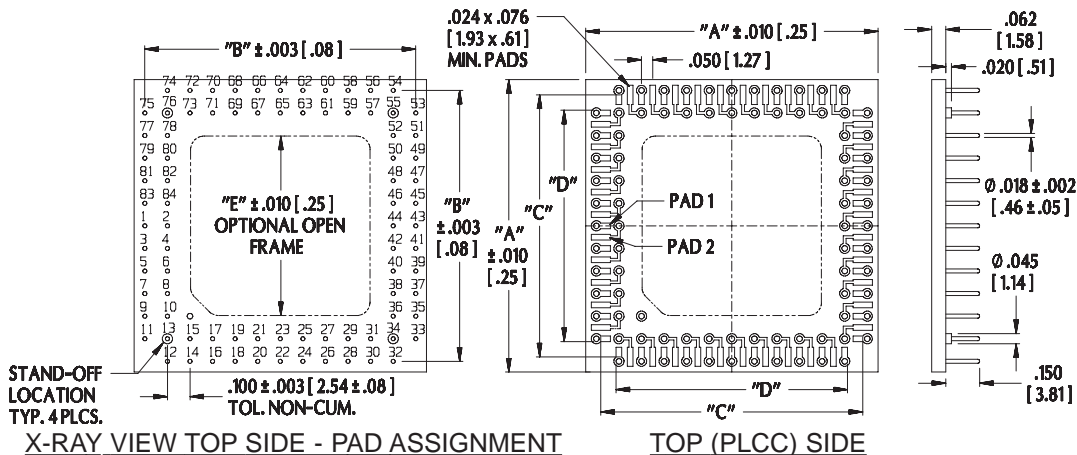

ARIES[®]
 ELECTRONICS, INC.
<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
 Frenchtown, NJ USA
 TEL: (908) 996-6841
 FAX: (908) 996-3891



EUROPE
 TEL: +44 870 240 0249
 FAX: +44 871 919 6033
europe@arieselec.com

18028
 REV.J