




Series ME-100 Economy Mini-Link™ Miniature Jumper

FEATURES:

- Mini-Link™ miniature jumpers are useful for jumpering .025 [.63] square pins on .100 [2.54] centers.
- Used to jumper from row-to-row or from pin-to-pin.
- Their miniature size makes it possible to stack one on top of the other.
- Jumper terminal is partially exposed for testing.
- Sold in multiples of 1000.
- RoHS Material compliant. (Not compliant for RoHS Soldering Specifications.)

SPECIFICATIONS:

- Body material is black UL 94V-0 Glass-filled Polyester Thermoplastic.
- Contacts are Phosphor Bronze.
- Contact plating is Gold over Nickel.
- Contact current rating=3 Amps.
- Contact resistance=20 mOhms max.
- Withstanding voltage=500 VAC (RMS).
- Insulation resistance=1000 MOhms min.
- Operating temperature=-67°F to 185°F [-55°C to 85°C].
- Minimum insertion depth=.177 [4.50].

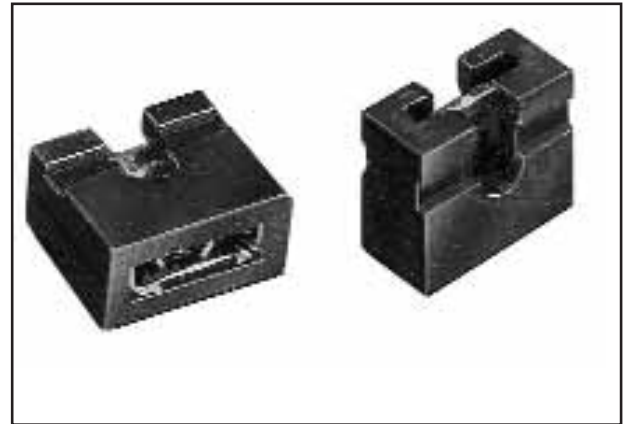


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances $\pm .005$ [.13] unless otherwise specified

Specify Part No. **ME-100** when ordering

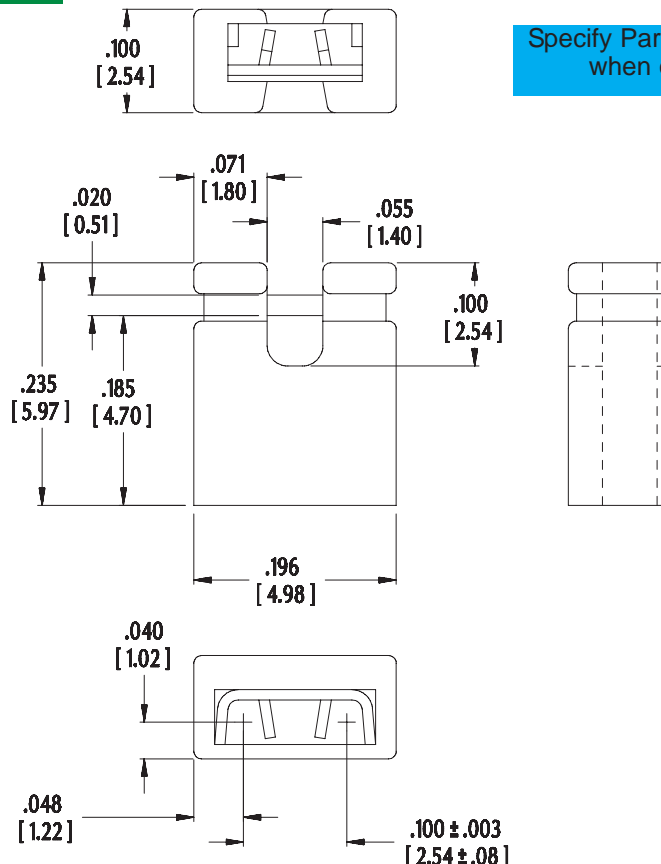

<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



EUROPE
TEL: +44 870 240 0249
FAX: +44 871 919 6033
europa@arieselec.com



16001
REV.B