



SY56034AR Evaluation Board

Low Voltage 1.2V/1.8V/2.5V 2:6 MUX with
Crosspoint Capability 5GHz/6.4Gbps

General Description

The SY56034AR evaluation board is designed for convenient set-up and quick evaluation. It allows the user to evaluate the part over the full voltage-range of the part without requiring any modification to the board.

The evaluation board standard configuration is AC-coupled inputs with DC-coupled outputs for direct interface to a 50 Ω -compatible oscilloscope. For applications that require a DC-coupled configuration, step-by-step instructions for modifying the board are included.

All datasheets and support documentation can be found at Micrel's web site at: www.micrel.com.


Features

- SY56034AR 1.2V/1.8V/2.5V CML outputs
- Single 2.5V VCC with 1.2V/1.8V/2.5V VCCO supply
- AC-coupled configuration for ease-of-use
- I/O interface includes on-board termination
- Fully assembled and tested
- Reconfigurable for DC-coupled operation

Applications

- SY56034AR 1.2V/1.8V/2.5V 2:6 MUX with Crosspoint Capability 5GHz/6.4Gbps

Evaluation Board

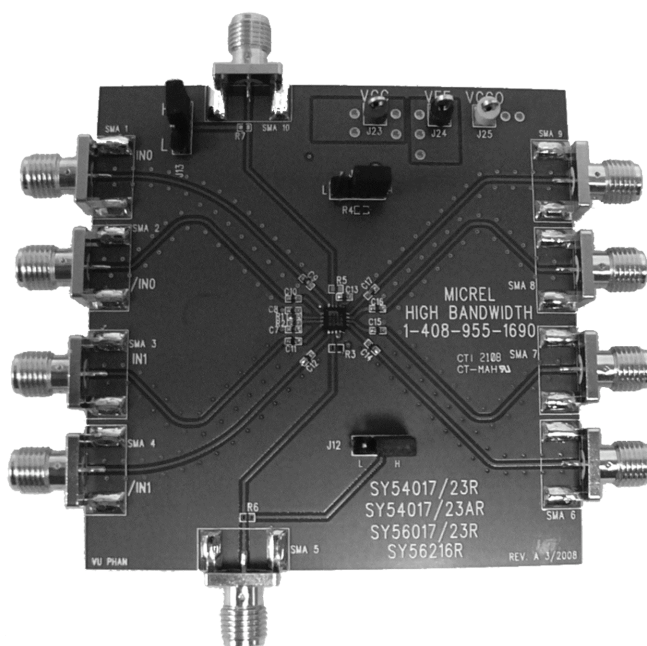

Evaluation Board Description

The SY56034AR evaluation board is designed to accept either AC-coupled or DC-coupled inputs. The DC-coupled outputs allow the CML output to be connected directly to a scope with the standard termination of 50Ω-to-ground. This is accomplished by tying the body of the SMA connectors to the V_{CCO} supply on the evaluation board so that the scope termination appears as 50Ω-to- V_{CCO} on the board. This allows the body of the SMA connectors, which are scope GND, to appear at the same potential as V_{CCO} for the CML output drivers.

The default configuration for the boards is AC-Coupled inputs and DC-Coupled outputs and all boards are shipped with this configuration. The choice between two configurations, AC-coupled or DC-coupled inputs, offers the user flexibility in selecting the board that is right for the given application.

Step-by-step instructions for modifying an AC-coupled evaluation board for DC-coupled operation are supplied in the section “Modifying your AC-Coupled Board for DC-Coupled Operation.”

If the output is connected to an AC-coupled 50Ω termination, the 1.2V operation may not work due to a 200mV output level shift from the output coupling capacitors.

Although the SY56034AR has 6 differential output pairs split between 2 banks, the evaluation board only uses two outputs, Q3 and Q4. This ensures that both output banks are evaluated without having an excessively large board.

SY56034AR AC-Coupled Evaluation Board (AC-Coupled Input, DC-Coupled Output)

For a 1.2V output configuration, the V_{CC} of the board is set to 2.5V and the V_{CCO} is set to 1.2V. For a 1.8V output configuration the V_{CCO} is set to 1.8V. For a full 2.5V operation, short V_{CCO} to V_{CC} . For all configurations the V_{EE} is set to 0V.

Setting up the AC-Coupled Evaluation Board (AC-Coupled Input, DC-Coupled Output)

The following steps describe the procedure for setting up the CML-output evaluation board:

Setting up the Power Supplies

1. Set the voltage setting of a DC supply to 2.5V and turn off the supply.
2. Set the voltage setting for a second DC supply to be 1.2V, 1.8V or 2.5V and turn off the supply.

3. 2.5V output operation can also be achieved by shorting V_{CCO} to V_{CC} and operating with one supply.
4. Connect the negative terminal of the two power supplies together and connect to the V_{EE} terminal of the evaluation board.
5. Do not earth-ground either supply.
6. Turn on the power supplies and verify that the 2.5V supply current is <150mA and 1.2V/1.8V/2.5V supply is <130mA. If using one supply, <280mA.
7. Turn off the power supplies.

Setting up the AC-Coupled Input

1. Using a differential signal source set the HIGH level of each side of the differential pair to be 0.4V and the LOW level to be 0V. Note that for AC-coupled inputs, only the signal swing is significant, since the inputs will be re-biased after the series capacitor. The amplitude of the input swing can be any value between 200mV and 1.0V.
2. Using equal length 50Ω impedance coaxial cables, connect the signal source to the desired input(s). (Pin 2 and 3 for IN0; Pin 6 and 7 for IN1).


SEL0	SEL1	Bank1 (Q3)	Bank2 (Q4)
L	L	IN0	IN0
L	H	IN0	IN1
H	L	IN1	IN0
H	H	IN1	IN1

Table 1. Truth Table

Setting up the DC-Coupled Output

1. Select the input to output combination desired by using Switch S1. Please refer to Table 1 above.
2. Using equal length 50Ω impedance coaxial cables connect the SMA outputs of the evaluation board (Pin 20 and Pin 19 for Q3, Pin 15 and Pin 14 for Q4) to the oscilloscope or other measurement device that has an internal DC-Coupled 50Ω termination. If only one output is connected to the oscilloscope, the complementary output must still be terminated with a 50Ω termination. The second output pair also needs to be terminated into 50Ω
3. Turn on the power supplies, and check supply current levels to make sure they are below the limits above. If shorted, check system ground.
4. Enable the signal source and monitor the outputs.

Evaluation Board

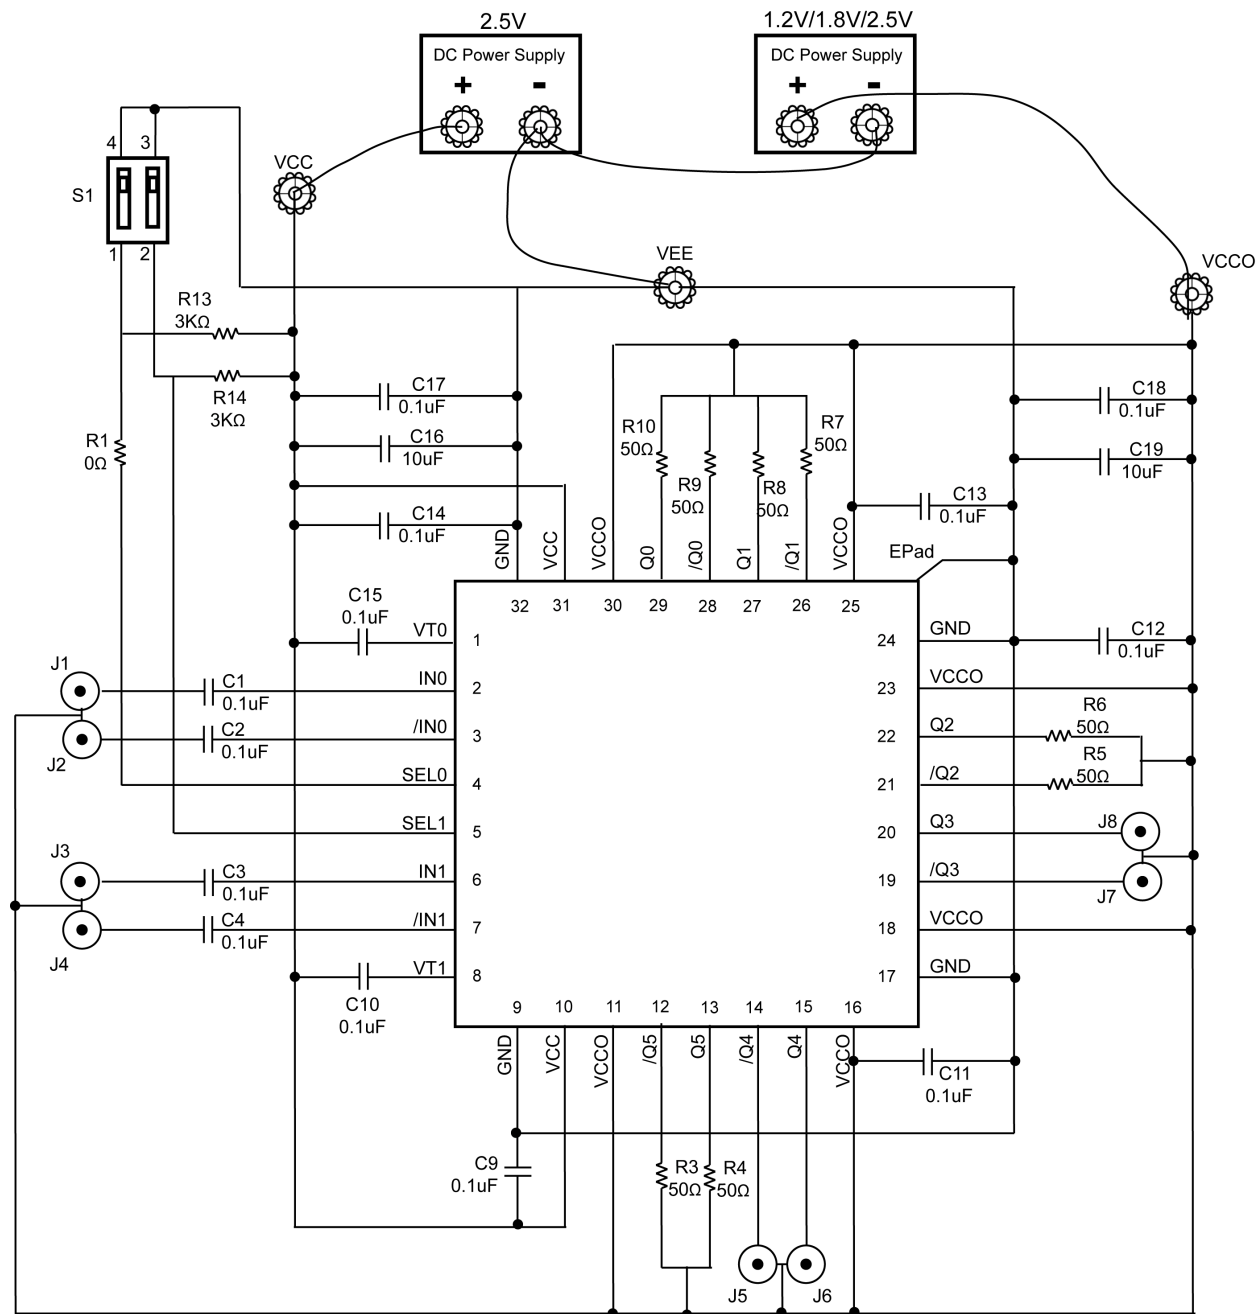

SY56034AR AC-Coupled Evaluation Board

Power Supply	V _{CC}	V _{CCO}	V _{EE}	I/O
1.2V Output	2.5V	1.2V	0V	AC-Coupled Input/DC-Coupled Output
1.8V Output	2.5V	1.8V	0V	AC-Coupled Input/DC-Coupled Output
2.5V Output	2.5V	2.5V	0V	AC-Coupled Input/DC-Coupled Output

Table 2. SY56034AR AC-Coupled Evaluation Board Power Supply Connections

Bill of Materials

SY56034AR Evaluation Board

Item	Part Number	Manufacturer	Description	Qty.
C1-C4, C9-C15	VJ0402Y104KXXAT	Vishay ⁽¹⁾	0.1 μ F, 25V, 10% Ceramic Capacitor, Size 0402, X7R Dielectric	10
C16,C18	293D106X0010	Vishay ⁽¹⁾	10 μ F, 20V, Tantalum Electrolytic Capacitor, Size C	2
C17, C19	VJ0805Y104KXXAT	Vishay ⁽¹⁾	0.1 μ F, 25V, 10% Ceramic Capacitor, Size 0805	2
R1	CRCW040200R0F	Vishay ⁽¹⁾	0 Ω , 1/16W, 1% Thick-film Resistor, Size 0402	1
R3-R10	CRCW040249R9F	Vishay ⁽¹⁾	50 Ω , 1/16W, 1% Thick-film Resistor, Size 0402	9
R13, R14	CRCW04022941F	Vishay ⁽¹⁾	3K Ω , 1/16W, 1% Thick-film Resistor, Size 0402	
J10			Red Test Point (V _{CC})	1
J11			Black Test Point (V _{EE})	1
J12			Yellow Test Point (V _{CCO})	1
S1	CKN1362-ND	C&K ⁽⁴⁾	2-position Dip Switch, Half Pitch Surface Mount	1
J1-J8,	142-0701-851	Johnson Components ⁽²⁾	Jack Assembly End Launch SMA	8
U1	SY56034AR	Micrel ⁽³⁾	Low Voltage 1.2V/1.8V/2.5V 2:6 MUX with Crosspoint Capability	1

Notes:

1. Vishay: www.vishay.com.
2. Johnson Components: www.johnsoncomponents.com.
3. Micrel, Inc.: www.micrel.com.
4. C&K Components, Inc.: www.ck-components.com.

Additional Bill of Materials for SY56034AR DC-Coupled Evaluation Board

Item	Part Number	Manufacturer	Description	Qty.
C1-C4	CRCW040200R0F	Vishay ⁽¹⁾	Replace with 0 Ω , 1/16W, 1% Thick-film Resistor, Size 0402,	4
R11,R12	CRCW040200R0F	Vishay ⁽¹⁾	Add 0 Ω , 1/16W, 1% Thick-film Resistor, Size 0402	2

Notes:

1. Vishay: www.vishay.com

PC Board Layout

Board Layout

The evaluation boards are constructed with Rogers 4003 material, fabricated to minimize noise, achieve high bandwidth and minimize crosstalk.

L1	Signal
L2	V _{CCO} Power
L3	V _{CC} Power
L4	V _{EE} Power
L5	V _{CCO} Power
L6	Signal

Table 2. Layer Stack

Modifying the AC-Coupled Board for DC-Coupled Operation

When DC-Coupling is Necessary

For applications where AC-coupling of the inputs is not appropriate, the board can be reconfigured for DC-coupled input operation.

Reconfiguring AC-Coupled Inputs to be DC-Coupled Inputs

The following procedure details the steps for converting an AC-coupled board to a DC-coupled board.

1. Replace capacitors C1-C4 with 0Ω resistors.
2. Add R11 and R12, 0Ω resistors.

Setting up the SY56034AR DC-Coupled Evaluation Board (DC-Coupled Input, DC-Coupled Output)

The following steps describe the procedure for setting up the CML-output evaluation board:

Setting up the Power Supplies

1. Set the voltage setting for a DC supply to be 2.5V and turn off the supply.
2. Set the voltage setting for a second DC supply to be 1.2V, 1.8V or 2.5V and turn off the supply.
3. 2.5V output operation can also be achieved by shorting V_{CCO} to V_{CC} and operating with one supply.
4. Connect the negative terminal of the two power supplies together and connect to the V_{EE} terminal of the evaluation board.
5. Do not earth-ground either supply.

6. Turn on the power supplies and verify that the 2.5V supply current is <150mA and 1.2V/1.8V/2.5V supply is <130mA. If using one supply, <280mA.
7. Turn off the power supply.

Setting up the DC-Coupled Input

1. When the inputs are DC-coupled, they are referenced to V_{CCO} because the body of the SMA connectors is tied to V_{CCO}. Therefore, the device HIGH and LOW input voltage levels will change depending upon V_{CCO}. To make the input HIGH level 1.8V and LOW level 1.4V, follow Table 3 for programming the differential signal source. If the levels are varied, make sure they remain within the datasheet input range.

V _{CCO}	HIGH	LOW
1.2	0.6V	0.2V
1.8	0V	-0.4V
2.5	-0.7V	-1.1V


Table 3. Source Levels as a Function of V_{CCO}

2. Using equal length 50Ω impedance coaxial cables, connect the signal source to the desired input(s). (Pin 2 and 3 for IN0; Pin 6 and 7 for IN1).

Setting up the DC-Coupled Output

1. Select the input to output combination desired by using Switch S1. Please refer to Table 1 above.
2. Using equal length 50Ω impedance coaxial cables connect the SMA outputs of the evaluation board (Pin 20 and Pin 19 for Q3, Pin 15 and Pin 14 for Q4) to the oscilloscope or other measurement device that has an internal DC-coupled 50Ω termination. If only one output is connected to the oscilloscope, then the complementary output must still be terminated with a 50Ω termination. The second output pair also needs to be terminated into 50Ω.
3. Turn on the power supplies, and check supply current levels to make sure they are below the limits above. If shorted, check system ground.
4. Enable the signal source and monitor the outputs.

Evaluation Board

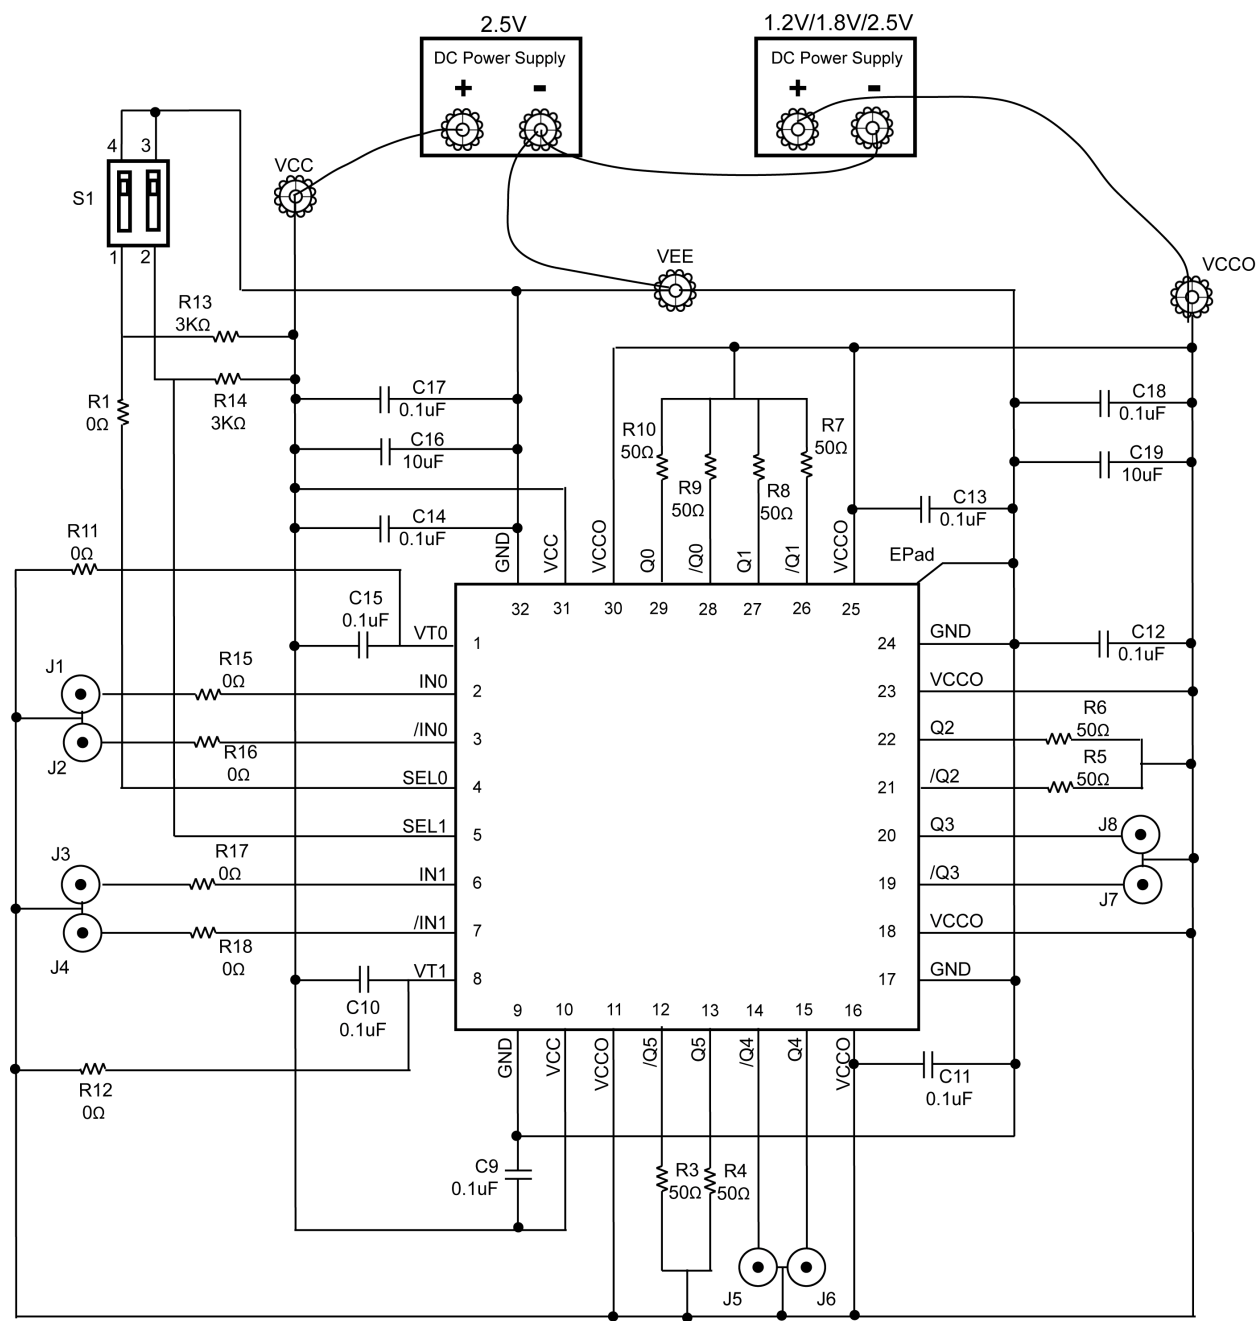

SY56034AR DC-Coupled Evaluation Board

Power Supply	V _{CC}	V _{CCO}	V _{EE}	I/O
1.2V Output	2.5V	1.2V	0V	DC-Coupled Input/DC-Coupled Output
1.8V Output	2.5V	1.8V	0V	DC-Coupled Input/DC-Coupled Output
2.5V Output	2.5V	2.5V	0V	DC-Coupled Input/DC-Coupled Output

Table 5. SY56034AR DC-Coupled Evaluation Board Power Supply Connections

HBW Support

Hotline: 408-955-1690

Email Support: HBWHelp@micrel.com

Application Hints and Notes

For application notes on high speed termination on PECL and LVPECL products, clock synthesizer products, SONET jitter measurement, and other High Bandwidth products go to Micrel Inc., website at: <http://www.micrel.com/>. Once in Micrel's website, follow the steps below:

1. Click on "Product Info".
2. In the Applications Information Box, choose "Application Hints and Application Notes."

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2008 Micrel, Incorporated.