



## MIC5320/1 Evaluation Board

High Performance Dual 150mA  
 $\mu$ Cap ULDO™

### General Description

The MIC5320 and MIC5321 are tiny dual output, ultra low dropout linear regulators. The MIC5320 regulator provides two independent enable pins, to disable each output separately. The MIC5321 regulator provides a single enable pin for both outputs as well as a bypass pin to reduce the output voltage noise. The MIC5320/1 provides two high performance 150mA LDOs in a tiny 6 pin 1.6mm x 1.6mm Thin MLF® package.

The MIC5320/1 dual Ultra Low Dropout (ULDO™) linear regulator is easy to use. A small output capacitance of only 1 $\mu$ F for each of the outputs is required. A bypass capacitor of 0.01 $\mu$ F is included on the evaluation board for the MIC5321 to reduce the output voltage noise and improve the Power Supply Rejection Ratio (PSRR).

An input capacitor may be required when the power supply is more than 4-inches away from the device. The evaluation board includes an input capacitor of 10 $\mu$ F to compensate for long inductive test leads.

### Requirements

The MIC5320/1 evaluation board requires an input power source that is able to deliver at least 300mA at a voltage within the range of 2.3V to 5.5V. The output load can be either active or passive.

### Precautions

The evaluation board does not have reverse polarity protection. Applying a negative voltage to the  $V_{IN}$  terminal may damage the device.

The evaluation board is tailored for a Li-Ion range input supply voltage. It should not exceed 5.5V on the input.

### Getting Started

1. **Connect an external supply to  $V_{IN}$ .** Apply the desired input voltage to the  $V_{IN}$  (J1) and ground terminal (J2) of the evaluation board, paying careful attention to polarity and supply voltage ( $2.3V \leq V_{IN} \leq 5.5V$ ). An ammeter may be placed between the input supply and the  $V_{IN}$  terminal to the evaluation board to accurately monitor the input current. The ammeter and/or power lead resistance can reduce the voltage supplied to the input so monitor the supply voltage at the  $V_{IN}$  terminal.
2. **Enable/Disable the MIC5320.** The evaluation board is set up for "Default Enable" on both outputs with a 10k pull up resistor on each of the enable pins (EN1 and EN2) to  $V_{IN}$ . To disable an output, simply jumper the EN terminal (J7 for LDO1, J3 for LDO2) to the GND terminal (J2 or J5). The enable pins must be either pulled high or low for proper operation. Removing the pull up resistors and leaving the pins floating will cause the regulators to operate in an indeterminate state. The MIC5321 has a single enable pin (J7) to control both outputs of the regulator.
3. **Connect the loads to the  $V_{OUT}$  terminals (J4 for LDO1, J6 for LDO2) and ground terminal (J5).** The load can be either a passive (resistor) or active (electronic load). Be sure to monitor the output voltage at the  $V_{OUT}$  (J4 and J6) terminals.

### Ordering Information


| Part Number      | Description                                                   |
|------------------|---------------------------------------------------------------|
| MIC5320-XXYMT EV | Evaluation board with the 150mA Dual ULDO™ device             |
| MIC5321-XXYMT EV | Evaluation board with the 150mA Dual ULDO™ device with bypass |

ULDO is a trademark of Micrel, Inc.

MLF and MicroLeadFrame are registered trademarks of Amkor Technology, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>

## Evaluation Board Schematic

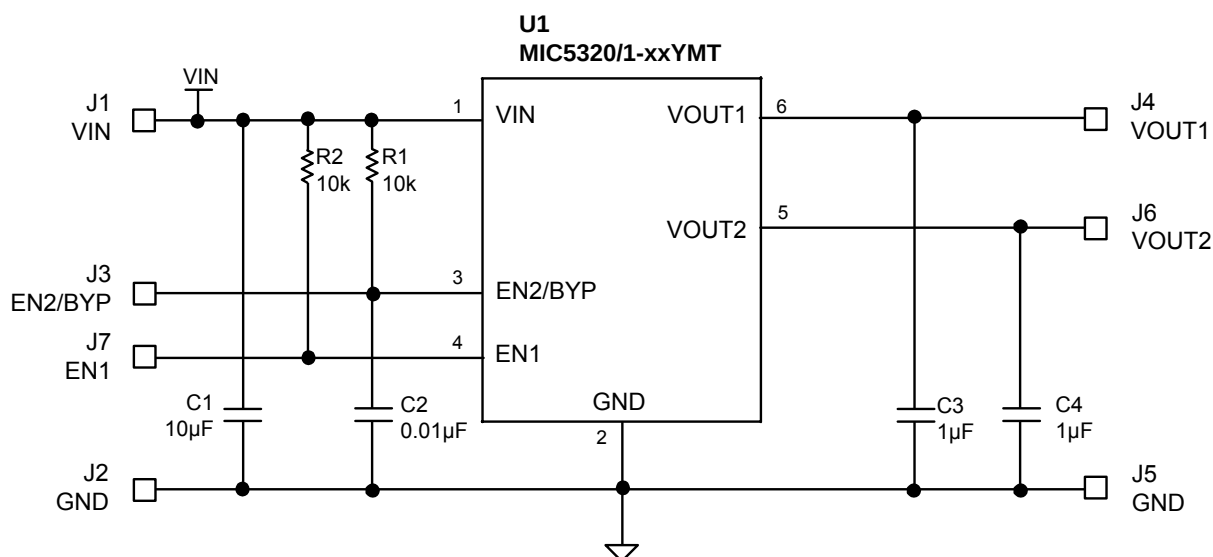

## Bill of Materials MIC5320-XXYMT

| Item   | Part Number        | Manufacturer          | Description                                        | Qty |
|--------|--------------------|-----------------------|----------------------------------------------------|-----|
| C1     | C1608X5R0J106M     | TDK <sup>(1)</sup>    | Capacitor, 10µF Ceramic, 6.3V, X5R, Size 0603      | 1   |
| C2     | OPEN               |                       | Do not populate                                    |     |
| C3, C4 | C1608X5R0J105M     | TDK <sup>(1)</sup>    | Capacitor, 1µF Ceramic, 6.3V, X5R, Size 0603       | 2   |
| R1, R2 | CRCW06031002FKEYE3 | Vishay <sup>(2)</sup> | Resistor, 10kΩ, 1%, 1/16W, Size 0603               | 2   |
| U1     | MIC5320-XXYMT      | Micrel <sup>(3)</sup> | UCAP LDO, Dual 150mA, Size 1.6mm x 1.6mm Thin MLF® | 1   |



## Bill of Materials MIC5321-XXYMT

| Item   | Part Number        | Manufacturer          | Description                                        | Qty |
|--------|--------------------|-----------------------|----------------------------------------------------|-----|
| C1     | C1608X5R0J106M     | TDK <sup>(1)</sup>    | Capacitor, 10µF Ceramic, 6.3V, X5R, Size 0603      | 1   |
| C2     | VJ0603Y103KXQ      | Vishay <sup>(2)</sup> | Capacitor, 0.01µF Ceramic, 10V, X7R, Size 0603     | 1   |
| C3, C4 | C1608X5R0J105M     | TDK <sup>(1)</sup>    | Capacitor, 1µF Ceramic, 6.3V, X5R, Size 0603       | 2   |
| R1     | OPEN               |                       | Do not populate                                    |     |
| R2     | CRCW06031002FKEYE3 | Vishay <sup>(2)</sup> | Resistor, 10kΩ, 1%, 1/16W, Size 0603               | 1   |
| U1     | MIC5321-XXYMT      | Micrel <sup>(3)</sup> | UCAP LDO, Dual 150mA, Size 1.6mm x 1.6mm Thin MLF® | 1   |

### Notes:

1. TDK: [www.tdk.com](http://www.tdk.com)
2. Vishay: [www.vishay.com](http://www.vishay.com)
3. Micrel, Inc.: [www.micrel.com](http://www.micrel.com)

## PCB Layout Recommendations

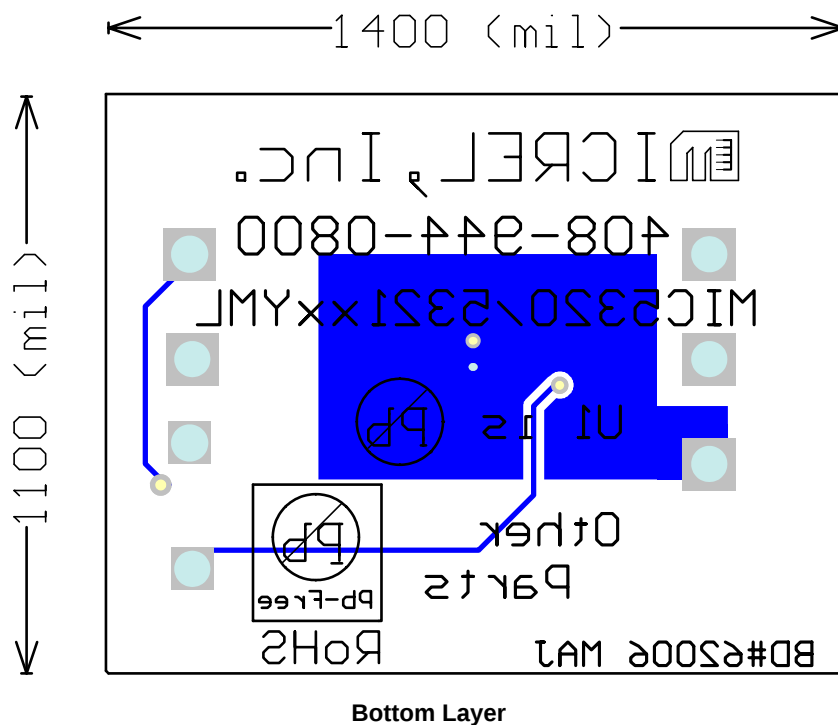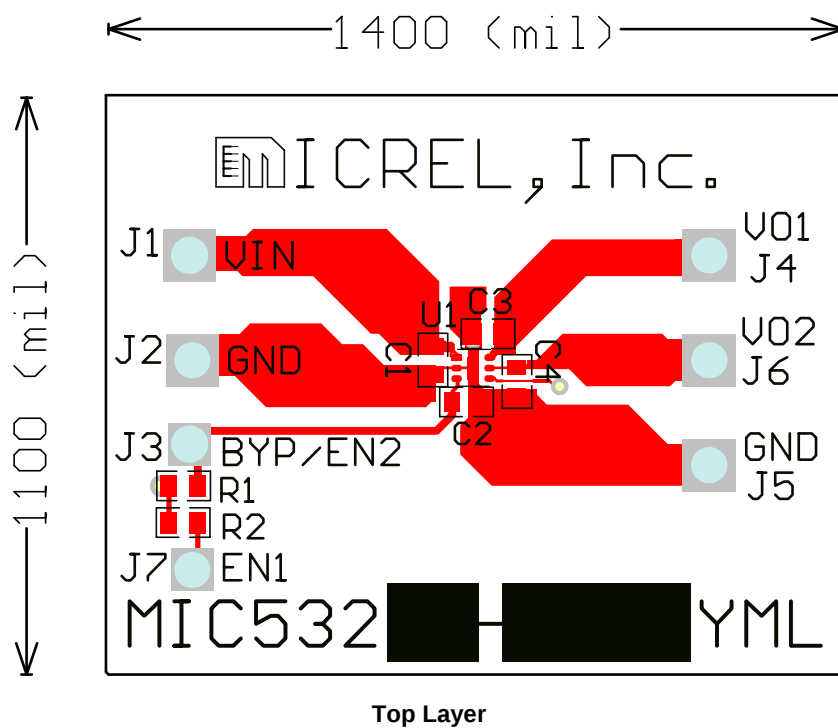

---

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**  
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2008 Micrel, Incorporated.