

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1773751

LPT50 Series

50 Watts

Total Power: 47 - 50 Watts
Input Voltage: 90-264 VAC
127-300 VDC
of Outputs: Triple



Special Features

- Universal input
- 2" x 4" footprint
- Less than 1U high
- Overpower and short circuit protection
- High efficiency
- High MTBF
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator
- Input power <74 watts
- Complies with EN61000-3-2
- UL Class I approved
- LPX50 enclosure kit available

Safety

UL UL 60950-1
CSA CSA-C22.2 No. 60950-1
TUV EN60950-1
CB Certificate and report
CE LVD & EMC

Electrical Specifications

Input

Input range	90-264 VAC (wide range) 127-300 VDC
Frequency	47-440 Hz
Inrush current	<60 A peak @ 230 VAC, cold start @ 25°C
Efficiency	80% typical at full load
EMI RFI	FCC Class B conducted; CISPR 22 Class B conducted: EN55022 Class B conducted
Safety ground leakage current	0.5mA @ 50/60 Hz, 264 VAC input

Output

Maximum power	50 W for convection (LPT51, 47.4W)
Hold-up time	10/20 ms 115/230 VAC input line
Overpower protection	Short circuit protection on all outputs Case overpower protected @ 110-160% of normal rating
Overvoltage protection	30-50% above nominal output

Environmental Specifications

Operating temperature:	0° to 50°C ambient. Derate each output 2.5% per degree from 50° to 70°C. -20°C start up
Storage temperature:	-40°C to +85°C
Electromagnetic susceptibility:	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity:	Operating; non-condensing 10% to 95% RH
Vibration:	IEC68-2-6 to the levels of IEC721-3-2
MTBF demonstrated:	>550,000 hours at full load and 25°C ambient conditions



Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Peak Load ¹	Regulation ²	Ripple P/P (PAR) ³
LPT51	+3.3V	0.8A	8A	9A	±2%	50 mV
	+5V	0.1A	3A	4A	±6%	50mV
	+12V	0A	0.5A	1A	±5%	120mV
LPT52	+5V	0.5A	8A	9A	±2%	50 mV
	+12V	0.1A	3A	4A	±5%	120mV
	-12V	0A	0.5A	1.0A	±5%	120mV
LPT53	+5V	0.5A	8A	9A	±2%	50 mV
	+15V	0.1A	2.4A	3.2A	±5%	150mV
	-15V	0A	0.5A	0.7A	±5%	150mV
LPT54	+5V	0.5A	8A	9A	±2%	50 mV
	+24V	0.1A	1.5A	2A	±7%	240mV
	+12V	0A	0.5A	0.7A	±5%	120mV

1. Peak current lasting <15 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 μ F (tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.

Pin Assignments

Connector	LPT51	LPT52	LPT53	LPT54
SK1-1	Neutral	Neutral	Neutral	Neutral
SK1-3	Line	Line	Line	Line
SK2-1	+3.3 V	+5 V	+5V	+5V
SK2- 2	+3.3 V	+5 V	+5V	+5V
SK2- 3	Common	Common	Common	Common
SK2-4	Common	Common	Common	Common
SK2-5	12V	-12V	-15V	+12V
SK2-6	5V	+12V	+15V	+24

Mating Connectors


AC Input: Molex 09-50-8031 (USA)
09-91-0300 (UK)
PINS: 08-52-0113

DC Outputs: Molex 09-50-8061 (USA)
09-91-0600 (UK)
PINS: 08-52-0113

Astec Connector Kit #70-841-006, includes all of the above

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ±0.02" (±0.5mm)
3. Mounting holes M1 and M2 should be grounded for EMI purposes.
4. Mounting hole M1 is safety ground connection.
5. Specifications are for convection rating at factory settings at 115 VAC input, 25°C unless otherwise stated.
6. Warranty: 2 year
7. Weight: 0.45lbs/0.20kg

Mechanical Drawing

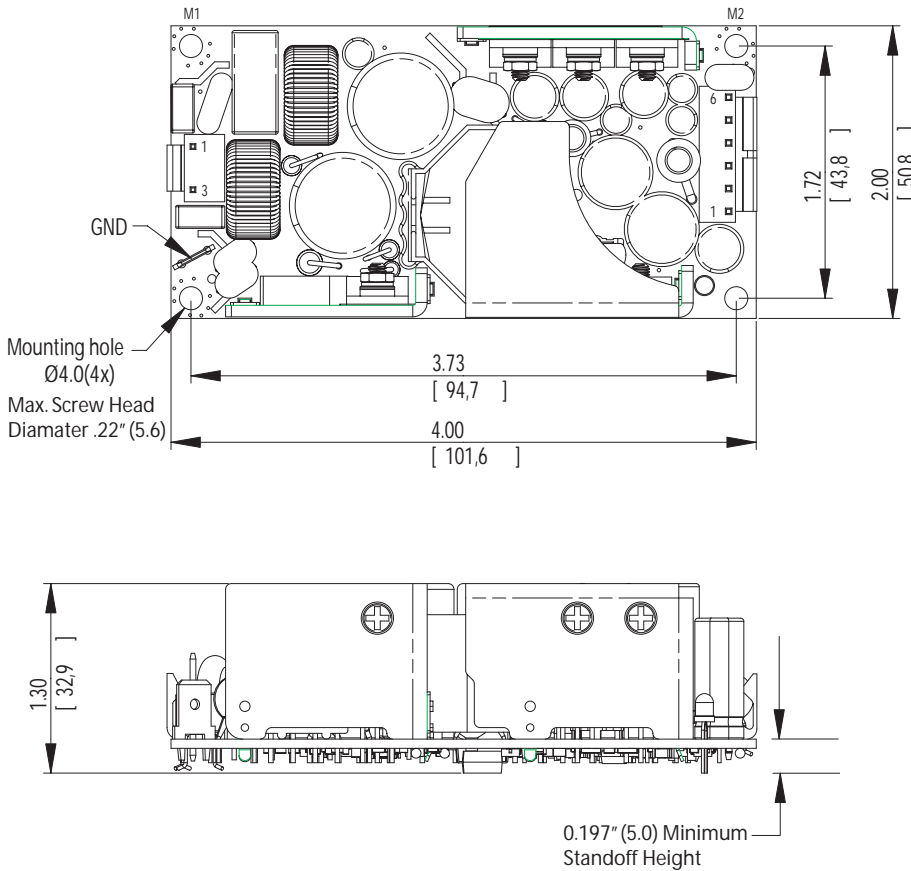

Astec

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

13-15, Shing Wan Road
Tai Wai, Shatin, N. T.
Hong Kong
Telephone: +852 2699 2868
Facsimile: +852 2699 1770

For global contact, visit:

www.astecpower.com

www.artesyn.com

technicalsupport@astec.com

technicalsupport@artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in U.S.A.

Emerson Network Power.

The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com