

# POWER

## LCM3000

### 3000 Watt Bulk Front End

#### Data Sheet

**Total Power:** 3000 W  
**# of Outputs:** Single  
**Outputs:** 12 to 72 V

#### SPECIAL FEATURES

- 3000 W output power
- Low cost
- 2.5" x 7.0" x 10.9"
- 15.7 Watts per cubic inch
- Industrial/Medical safety
- 40 °C to 70 °C with derating
- 5 V @ 2 A housekeeping
- High efficiency: 90% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ± 25% adjustment range
- V-Programming from 20% to 125%
- VAR configurable to any voltage from a single unit
- Five-year warranty

#### COMPLIANCE

- EMI Class A, with 6db margin
- IEC 61000 Immunity
- RoHS 2

#### SAFETY


- UL/cUL Recognized ITE (UL60950-1)
- UL/cUL Recognized Medical (ANSI/AAMI ES60601-1)
- TUV-SuD ITE + Medical (EN60950-1 and EN60601-1)
- CE LVD (EN60950-1 + RoHS)
- CB Report
  - through Demko for IEC60950-1
  - through TUV-SuD for IEC60601-1
  - through DEMKO for IEC62368-1

\*\* LCM3000 tested according to the medical standard IEC 60601-1-2 4th Edition.



#### Electrical Specifications

Input	
Input range	90 - 264 Vac (Operating) Derate to 1500 W below 180 Vac input 115/230 Vac (Nominal) TERMINAL BLOCK
Frequency	47-63 Hz, Nominal 50/60 Hz
Input fusing	Internal 30 A fuses, both lines fused
Inrush current	≤ 35 A peak, at 110 Vac and <60 A at 230 Vac
Power factor	0.95 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	20 A RMS max input current, at 100 Vac
Hold up time	14 ms minimum for nominal output voltage, at full rated load
Efficiency	> 90% typical at full load / 230 Vac nominal
Leakage current	< 500 µA @ 240 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse
Isolation	PRI-Chassis 2000VAC / 2828VDC PRI-SEC 3000VAC / 4242VDC 2xMOPP SEC-Chassis 500 Vdc

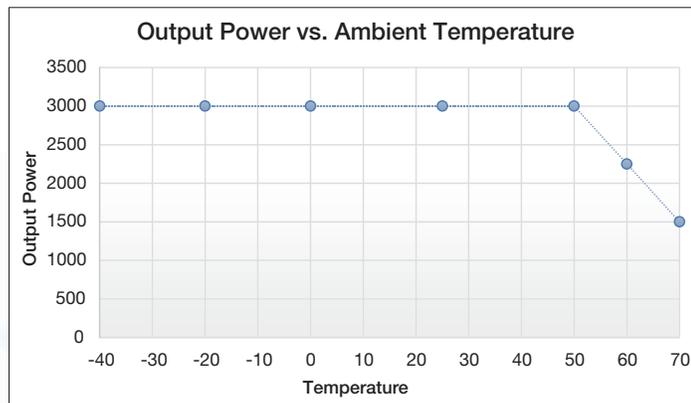

## Electrical Specifications

Output		
Output rating	See table 1	90 - 264 Vac (Derate down to 50% below 180 Vac)
Set point	± 0.5%	90 - 264 Vac
Total regulation range	Main output ± 1% 5 Vsb ± 5%	Combined line/load when measured at output terminal
Rated load	3000 W maximum (Derate to 1500 W when input is <180 Vac)	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 100 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF Ceramic and 10 µF Tantalum Capacitor on any output, 20 MHz
Output voltage overshoot	< 5% of voltage setting must settle within 300 mSec	Rise is monotonic
Transient response	± 5% of nominal output voltage	50% load step @ 1 A/µs Note: Consult specification for transient response for loads <10% Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel		Up to 8
Short circuit protection	Protected, no damage to occur	Bounce mode
Remote sense		Compensation up to 500 mV
Output isolation		Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Digital sharing control
Overload protection (OCP) – Constant current mode	105% to 125% 120% to 140%	Main output 5 Vsb output
Overvoltage protection (OVP)	110% to 130% 110% to 125%	Main output 5 Vsb output
Overtemperature protection	10 - 15 °C above safe operating area	Both PFC and output converter monitored

## Environmental Specifications

<b>Operating temperature</b>	-40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C Operation at -40 °C requires a 5 minute operating warm-up at -20 °C
<b>Storage temperature</b>	-40 °C to +85 °C
<b>Humidity</b>	10 to 90%, non-condensing. Operating. Conformal coat option available.
<b>Acoustic noise</b>	< 40 dBA, 60% load at 30 °C
<b>Altitude</b>	< 80% power derating is required for 5000 m 100% load at 3000 m
<b>Shock (Operating)</b>	MIL-STD-810G, method 516.6, Procedure I
<b>Vibration (Operating)</b>	MIL-STD-810G, method 514.6, Procedure I, Category 4-11



## Pin Assignment

Signals	Name Description	Pin Number(s)
+Vout	Power rail	SK4
GND	Power GND	SK5
Signals	Name Description	SK2 Pin Number
A2	EEPROM Address	1
-VPROG	Return connection of external supply for V-Programming from 20% to 125%	2
A1	EEPROM Address	3
-Vsense	Remote Sense Return	4
ISHARE	Load share voltage	5
A0	EEPROM Address	6
SDA1	Serial Data Signal (I2C)	7
+VPROG	Positive connection of external supply for V-Programming from 20% to 125%	8
SCL1	Serial Clock Signal (I2C)	9
+Vsense	Remote Sense Positive	10
5VSB	5V standby	11
GND	5V standby Return	12
5VSB	5V standby	13
G_DCOK_C	Global DCOK Collector	14
GPIOA6	EEPROM Write Protect	15
G_DCOK_E	Global DCOK Emitter (GND)	16
GND	Return Ground for output signal and I2C communication	17
G_ACOK_C	Global ACOK Collector	18
INH_EN	Turn Off Main Output	19
G_ACOK_E	Global ACOK Emitter (GND)	20

**Note:** Mating connector for SK2 is:

LANDWIN: PN 2050S2000 Housing and PN 2053T021V Contact

CIVILUX: PN C10120SD000 Housing and PN C101TD21PE0 Contact

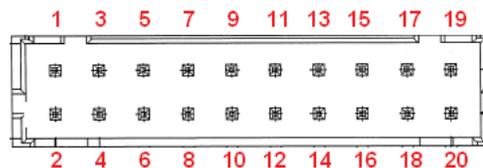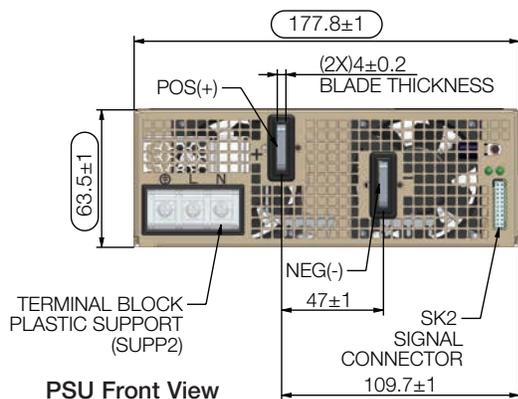

Signal Output Signal Connectors (SK2)

### LED INDICATORS

2 provided are clearly visible up to a 45 degree offset from vertical with office environment ambient lighting. The status is reflected in the indicator color.

**The DC\_OK LED** shall light green if the DC output is within specification, and shall be off if the output falls out of specification.

**The AC\_OK LED** is green if the AC is within specification and off when out of specification.

### CONTROL SIGNALS

**AC\_OK** Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

**DC\_OK** Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

**PS\_INHIBIT/ENABLE Signal** 0.0 - 0.5 V contact closure, output OFF; Option code "A" = 0.0 - 0.5 V or contact closure, output ON

### Ordering Information Table 1

Model Number*	Nominal Output Voltage Set Point	Adjustment Range		Max I (3000 W)	Max I (1500 W)	Output Ripple P/P (0-50 °C)	Combined Line/Load Regulation	Trim Range ± 25%	"Vprog Adjustment" 0 V to 6 V (20% to 125% Vout)
		Max I	Max Power (3000 W)						
LCM3000L-T	12 V	2.4 V - 12 V	12 V - 15 V	250 A	125 A	150 mV OR 1% whichever is higher	1%	9 V - 15 V	2.4 V - 15 V
LCM30008-T	18 V	3.6 V - 18 V	18 V - 22.5 V	166.7 A	83.3 A	180 mV OR 1% whichever is higher	1%	13.5 V - 22.5 V	3.6 V - 22.5 V
LCM3000Q-T	24 V	4.8 V - 24 V	24 V - 30 V	125 A	62.5 A	240 mV OR 1% whichever is higher	1%	18 V - 30 V	4.8 V - 30 V
LCM3000U-T	36 V	7.2 V - 36 V	36 V - 45 V	83.3 A	41.7 A	360 mV OR 1% whichever is higher	1%	27 V - 45 V	7.2 V - 45 V
LCM3000W-T	48 V	9.6 V - 48 V	48 V - 60 V	62.5 A	31.3 A	480 mV OR 1% whichever is higher	1%	36 V - 60 V	9.6 V - 60 V
LCM30007-T	72 V	14.4 V - 72 V	72 V - 90 V	41.7 A	20.8 A	720 mV OR 1% whichever is higher	1%	54 V - 90 V	14.4 V - 90 V

Notes:  
 (1) Minimum Current is (0)  
 (2) Set Point Tolerance is ±0.5%  
 (3) outputs above 60 Vdc are not SELV rated.


### Ordering Information Table 2

LCMXXXXY	-	A	-	B	-	###
Case Size		Input Termination		Option Codes*		Hardware Code
1-Phase input where XXXX =						
3000 = 2.5" x 7.0" x 11", 3000 W				Blank = No Options		Factory Assigned for Modified Standards
		T = Terminal Block		1 = Conformal Coat		
Voltage Code Y =				2 = Reverse Air		
Code				3 = Opt 1 + 2		
L	12			A = Reverse Logic for Inhibit/Enable		
8	18					
Q	24					
U	36					
W	48					
7	72					

\*Some option code combinations may not be configured yet and will require extra leadtime the first time they are requested.

## Mechanical Drawings (LCM3000 Series - All Voltages)

Unit weight: 3.7 Kg

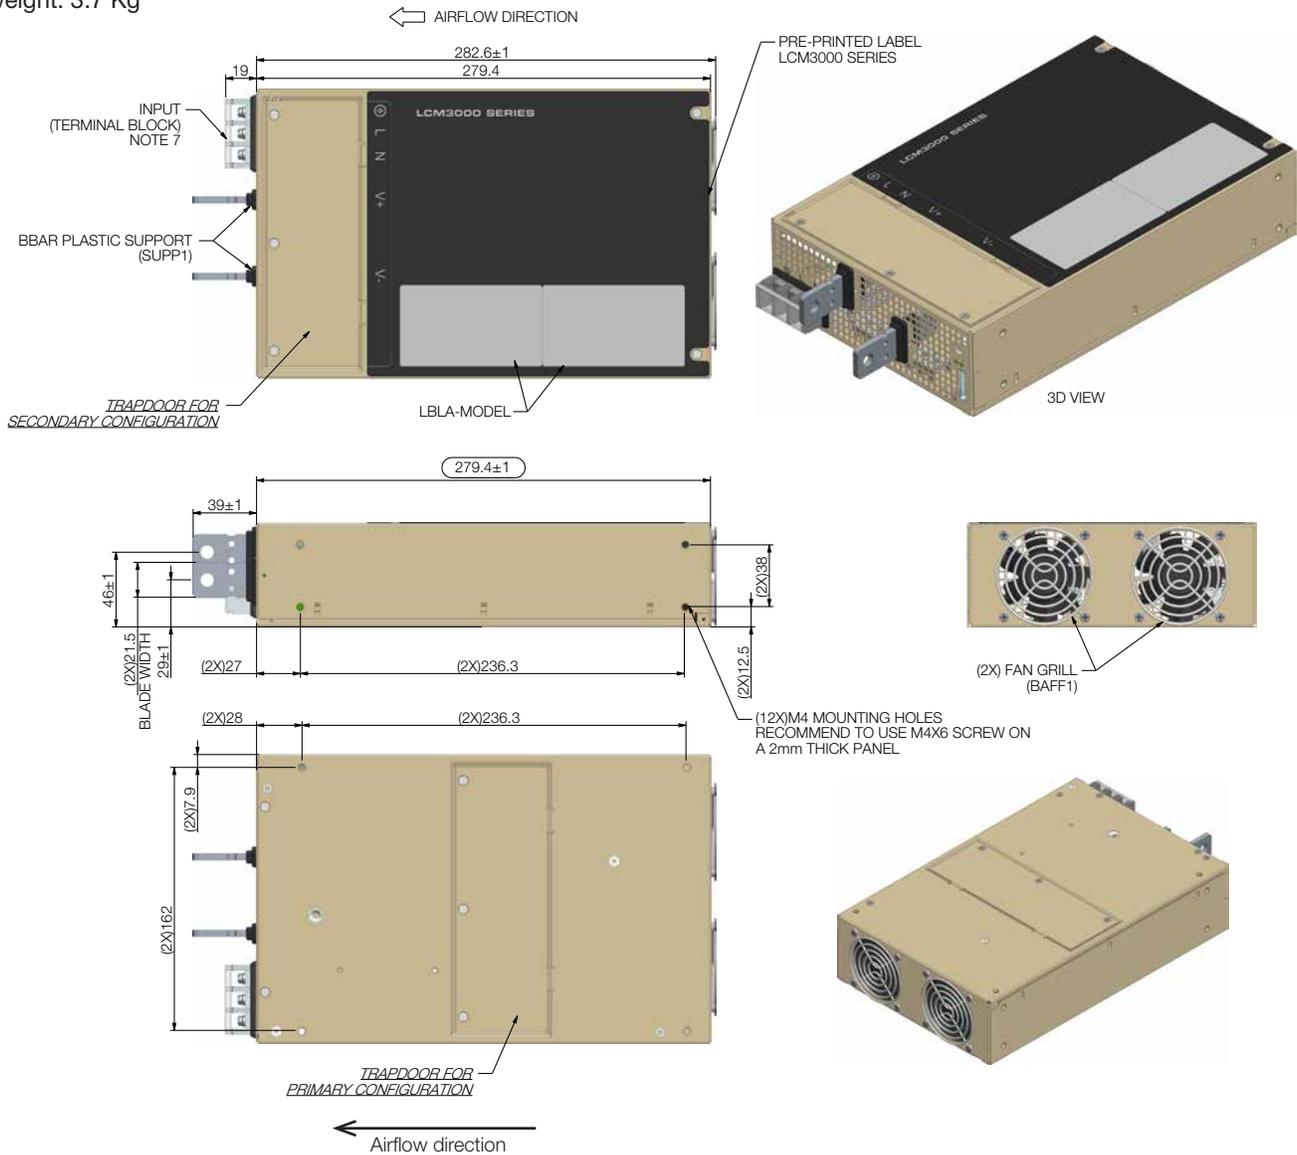

RECOMMENDED SCREW TORQUE:

M3.5 x 0.6P = 6 - 8 kgf-cm

M4.0 x 0.7P = 8 - 10 kgf-cm

INPUT TERMINAL BLOCK:

M4.0 screw with recommended torque of 16 kgf-cm

Recommended wire gage 18-10 (13 mm centers)


SUITABLE MATING CONNECTORS:

HSG-DR 20CKT (Landwin P/N: 2050S2000) or (Civlux P/N: CI0120SD00)



TERM-#22-28 (Landwin P/N: 2053T021V) or (Civlux P/N: CI01TD21PE0)

### Trimming Resistor location


A precision screw with positive (+) point should be used on the trimmer.  
Rotating in clockwise direction will increase the voltage set point. Access must be from the front panel.

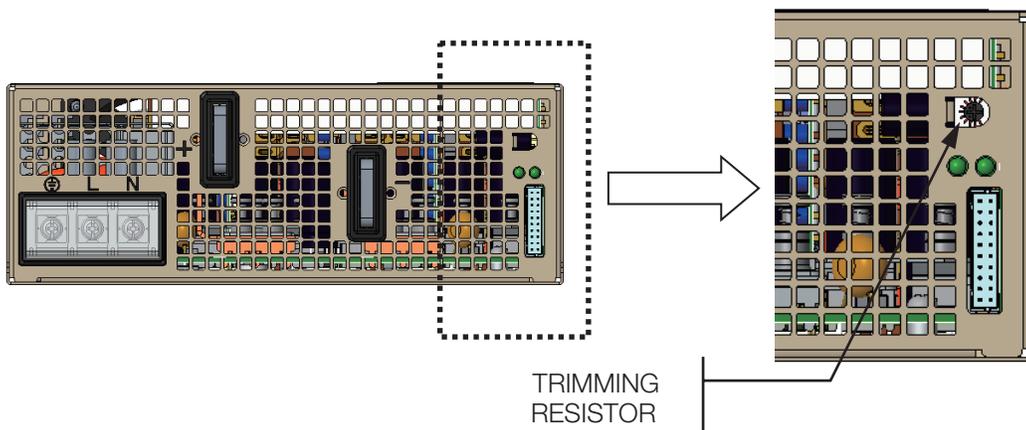


### Customer Mounting Screw

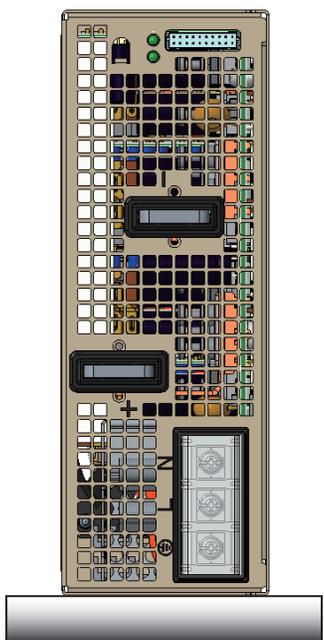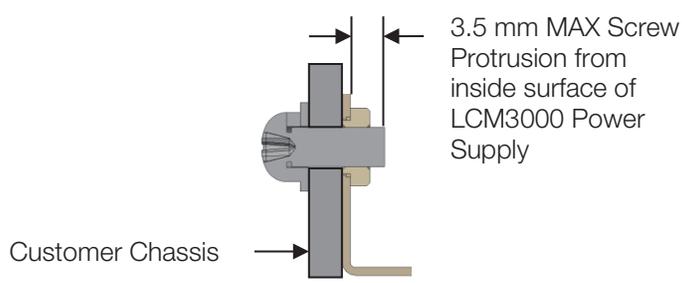

MOUNTING "A"

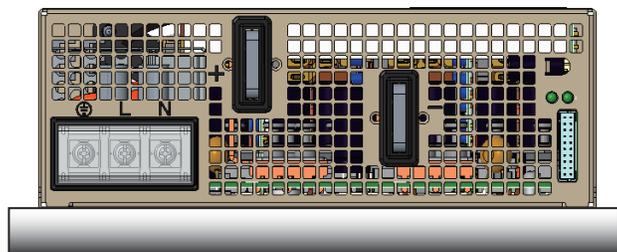


MOUNTING "B"

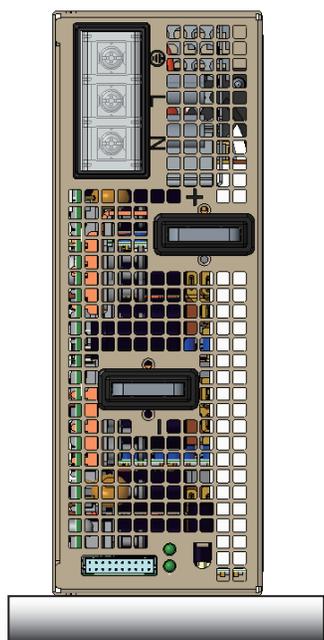


MOUNTING "C"

## Accessories

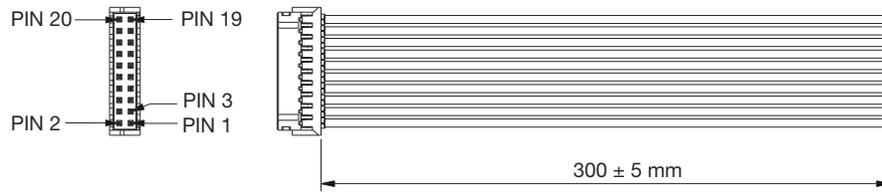

Order kit part number 73-788-001 for control connector interface with 0.3 m wires attached

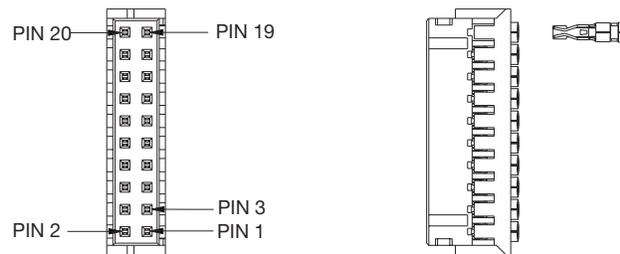

Order kit part number 73-788-002 for control connector interface with unloaded housing and 20 pins

## Miscellaneous Specifications

### BURN-IN

100% Burn-in at 45 °C, at 80 - 90 % load. Duration of burn-in determined by Quality Assurance Procedures.

### MTBF

The power supply has a minimum MTBF of 200K hours using the Telcordia 2 Method, with specifications @ 25 °C, ambient, at full load. With the power supply installed in a system in a 35 °C ambient environment and operating at full load, capacitor life shall be 5 years, minimum for ALL electrolytic capacitors contained within this power supply. The power supply shall demonstrate an MTBF level of > 500,000 hours based on actual field population operational hours.

### QUALITY ASSURANCE

Full QAV testing shall be conducted in accordance with Artesyn Embedded Power Standards with reports available upon request.

### WARRANTY

Artesyn Embedded Power shall warrant the power supply to be free of defects in materials and workmanship for a minimum period of five (5) years from the date of shipment, when operated within specifications. The warranty shall be fully transferable to the end owner of the equipment powered by the supply.

## WORLDWIDE OFFICES

### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

### Europe (UK)

Ground Floor Offices, Barberry House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2020 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)