

SIL15E Series

Non-Isolated DC-DC Converters

Data Sheet

Total Power: 49.5 Watts
Input Voltage: 10 - 14 Vdc
of Outputs: Single

SPECIAL FEATURES

- 15 A current rating
- Input voltage range: 10 - 14 Vdc
- Output voltage range: 0.8 - 3.63 V
- Ultra high efficiency: 94% @ 12 Vin and 3.3 Vout
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed-in reliability: MTBF of >7 million hours per Telcordia SR-332
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard footprint and pinout
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No. E174104
- UL6950 File No. E174104
- TÜV Product Service (EN60950) Certificate No. B 03 10 38572 037
- CB report and certificate to DE3-51686M1



Electrical Specifications

Input		
Input voltage range		10 - 14 Vdc
Input current	No load	70 mA
Input current (max.)		5.5 A @ Io max. and Vout = 3.3 V
Input current ripple		60 mA rms
Remote ON/OFF		See Note 1
Start-up time		35ms
Output		
Voltage adjustability		0.8 - 3.63 Vdc
Setpoint accuracy		±0.4% typical
Line regulation		±0.2% typical
Load regulation		±1.0% typical
Total error band		±3.0% typical
Minimum load		0 A
Overshoot/undershoot		None
Ripple and noise	5 - 20 MHz	60 mV pk-pk 25 mV rms max.
Temperature coefficient		±0.01% / °C
Transient response		100 mV max deviation 50 µs recovery to within ±1.0%
Remote sense		10% Vo compensation
Short circuit protection		Continuous
Thermal protection		Automatic recovery

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

General Specifications

Efficiency		See Table
Insulation voltage		Non-isolated
Switching frequency	Fixed	200 kHz typical
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions (vertical model)	L x W x H	50.8 x 7.8 x 12.7 mm 2.0 x 0.31 x 0.5 inches
Pin length		0.135 ± 0.02 inches 3.43 ± 0.5 mm
Weight		5 g (0.18 oz)
MTBF	Telcordia SR-332	7,042,000 hours

EMC Characteristics

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

Environmental Specifications

Thermal performance	Operating ambient temperature	-40 °C to +85 °C
(See Note 2)	Non-operating temperature	-40 °C to +125 °C

Ordering Information

Model Number ⁽³⁾	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SIL15E-12W3V3-VJ	49.5 W	10 - 14 Vdc	0.8 - 3.63 Vdc	0 A	15 A	94%	±0.2%	±1.0%

Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Type of Output	Output Voltage	Mounting Option	Packaging Options
SIL	15	E	- 12	W	3V3	- V	J
SIL = Single In Line	15 = 15 Amps	E = Enhanced Performance	12 = 10 - 14 Vdc	W = Wide	0.8 - 3.63 Vdc	V = Vertical H = Horizontal	J = Pb free (RoHS 6/6 compliant)

Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the SIL15E-12W3V3. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SIL15E-12W3V3 converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Notes:

- The SIL15E features an 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground. The following conditions apply for the SIL15E:

Configuration

Remote pin open circuit
Remote pin pulled low [Von/off <0.8V]
Remote pin pulled high [Von/off >1.6V]

Converter Operation


Unit is ON
Unit is OFF
Unit is ON

An 'Negative Logic' Remote ON/OFF version is also possible with this converter. To order please place the suffix 'R' towards the end of the model number, e.g. SIL15E-12W3V3-VRJ.

- Full derating curves available in both the Longform Datasheet and Application Note.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.

Mechanical Drawings

Pin Assignments	
J1	
Pin	Function
1	+Vout
2	+Vout
3	Remote Sense (+)
4	+Vout
5	Ground
J1	
Pin	Function
1	Ground
2	+Vin
3	+Vin
4	No Pin
5	Trim
6	Remote ON/OFF

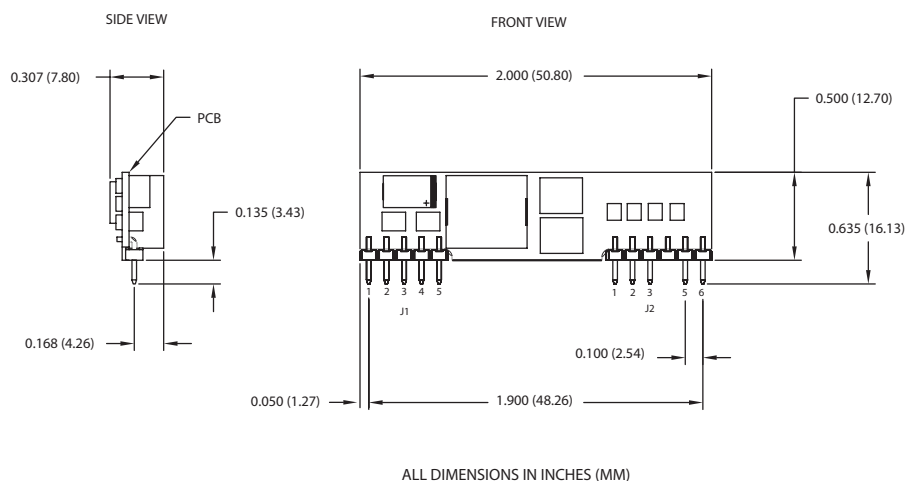

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com