

NFS40 Series

Single and triple output

Data Sheet


Total Power: 40 - 50 W
Input Voltage: 85-264 Vac
120 - 370 Vdc
of Outputs: Single, Triple

SPECIAL FEATURES

- 5.0 x 3.0 x 1.2 inch package (1U applications)
- Industry standard package
- Overvoltage and short circuit protection
- 40 W with free air convection
- 50 W with 20 CFM forced air
- EN55022, EN55011 conducted noise level B
- UL, VDE and CSA safety approvals
- Available RoHS compliant
- 2 years warranty

SAFETY

- VDE0805/EN60950/
- IEC950/IEC1010
- File No. 10401-3336-0044
- License No. 2559
- UL60950-1 File No. E13002
- CSA C22.2 No. 950
- File No. LR41062C

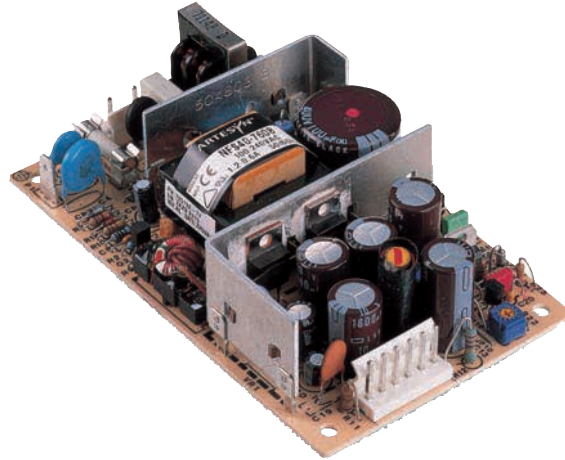

Electrical Specifications

Input		
Voltage adjustability:	+5V output on triples Vout on singles	± 5.0% ± 5.0%
Line regulation: LL to HL, FL	Main output Auxiliary outputs	± 0.2% ± 1.0%
Load regulation: FL to NL	Main output Auxiliary outputs	± 2.0% ± 5.0%
Transient response:	+5V (1.5 - 3A)	± 120 mV max. dev. 500 µs recovery
Temperature coefficient:	All outputs	± 0.02%/°C
Overvoltage protection:	+5V output	S3.15 A, 250 Vac In live and neutral
Output power limit:	Primary power limited	90 W input power limit
Short circuit protection:	Single outputs Multiple outputs	Continuous Short term
Output		
Input voltage range:	Universal input	85 - 264 Vac 120 - 370 Vdc
Input frequency range:		47-440 Hz
Max. input surge current:	132 Vac, cold start 264 Vac, cold star	12 A max. 24 A max.
Safety ground leakage current:	110 Vac, 60 Hz 230 Vac, 50 Hz	0.13 mA, max. 0.32 mA, max.

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

EMC Charateristics ^(11, 12)

Conducted emissions:	EN55022, FCC part 15	Level B
Radiated emissions:	EN55022	Level A
ESD air:	EN61000-4-2, level 3	Perf. criteria 1
ESD contact:	EN61000-4-2, level 4	Perf. criteria 1
Surge:	EN61000-4-2, level 3	Perf. criteria 1
Fast transients:	EN61000-4-4, level 3	Perf. criteria 1
Radiated immunity:	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity:	EN61000-4-6, level 3	Perf. criteria 2

General Specifications

Hold-up time:	110 Vac, 40W 230 Vac, 40W	14 ms 110 ms
Efficiency:		70% typical
Isolation voltage:	Input/output Input/chassis	3000 Vac 1500 Vac
Switching frequency:	Variable	
Approvals and standards: (see Notes 9, 13)	VDE0805, EN60950, IEC950, IEC1010, UL1950, CSA C22.2 No. 950	
Weight:	280g (9.88 oz)	
MTBF demonstrated:	MIL-HDBK-217E	170,000 hours

Environmental Specifications

Thermal performance:	Operating	0°C to +70°C
(See Notes 8, 10)	Non-operating	-40°C to +85°C
	50°C ambient temp., convection cooled	40W
	Forced air cooling	50W @ 20 CFM
	+50°C to +70°C ambient	Derate linearly to 50% load
	Peak (60 seconds)	60W
Relative humidity:	Non-condensing	5 to 80% RH
Altitude:	Operating	10,000 feet max.
	Non-operating	40,000 feet max.
Vibration (See Note 11):	5-500Hz	2.4 G rms peak

Ordering Information


Output Voltage	Output Current			Ripple ⁽⁴⁾	Total Regulation ⁽⁵⁾	Model Numbers ^(13, 14, F)
	Max ⁽¹⁾	Peak ⁽²⁾	Fan ⁽³⁾			
+5.1 V (A)	3 A	7 A	5 A	50 mV	± 2.0%	NFS40-7608J ^(5,6)
+12 V (B)	2 A	3 A	2 A	120 mV	± 5.0%	
-12 V (C)	0.35 A	1 A	0.5 A	120 mV	± 5.0%	
+5.1 V (A)	4 A	7 A	5 A	50 mV	± 2.0%	NFS40-7628J ⁽¹²⁾
+12 V (B)	0.35 A	1 A	0.5 A	120 mV	+ 5.0%	
-12 V (C)	0.35 A	1 A	0.5 A	120 mV	+ 5.0%	
+5.1 V (A)	3 A	7 A	5 A	50 mV	± 2.0%	NFS40-7607J ^(5,6)
+12 V (B)	2 A	3 A	2 A	120 mV	± 5.0%	
-5.0 V (C)	0.35 A	1 A	0.5 A	50 mV	± 5.0%	
+5.1 V (A)	3 A	7 A	5 A	50 mV	± 2.0%	NFS40-7610J ^(5,6)
+15 V (B)	2 A	2.5 A	2 A	150 mV	± 10.0%/-3.0%	
-15 V (C)	0.35 A	1 A	0.5 A	150 mV	± 5.0%	
3.3 V	6 A	12 A	8 A	100 mV	± 2.0%	NFS40-76S3J
+5.1 V	6 A	12 A	8 A	100 mV	± 2.0%	NFS40-7605J
+12.0 V	3.3 A	5 A	4 A	120 mV	± 2.0%	NFS40-7612J
+15.0 V	2.6 A	4 A	3.3 A	150 mV	± 2.0%	NFS40-7615J
+24.0 V	1.6 A	2.5 A	2 A	240 mV	± 2.0%	NFS40-7624J

Notes


1. Natural convection cooled, 40W maximum.
2. Peak output current lasting less than 30 seconds with duty cycle less than 10%.
During peak loading, outputs may go outside of total regulation limits. Peak total power must not exceed 60W.
3. Forced air, 20 CFM at 1 atmosphere, 50W maximum.
4. Figure is peak-to-peak. Output noise is measured across a 50 MHz bandwidth using a 12 inches twisted pair, terminated with a 47 µF capacitor.
5. Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits, load currents within stated limits, and output voltages adjusted to their factory settings. Also, $0.25 < I(A)/I(B) < 5.0$ to maintain stated regulation. This does not apply to the NFS40-7628J power supply as it has regulated auxiliary outputs.
6. A minimum load of 0.5 A is required on the +5V output to obtain full current from the negative output.
7. The NFS40 offers the possibility of power sharing between outputs. Consult factory for details.
8. Derating curve is application specific for ambient temperatures >50°C, for optimum reliability no part of the heatsink should exceed 110 °C and no semiconductor case temperature should exceed 115°C.
9. A 4 W minimum load is recommended to achieve the design MTBF.
10. Caution: Allow a minimum of 1 second after disconnecting the power when making thermal measurements.
11. Three orthogonal axes, sweep at 1 octave/minute, 5 minutes dwell at four major resonances.
12. The NFS40-7628J has separately linear regulated +12 V and -12 V outputs. The loading conditions in Notes 5 and 6 do not apply.
13. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
14. The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant.
15. NOTICE: Some models do not support all options. Please contact your local Artesyn Embedded Power representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.

Pin Assignments

J1	-7608J, -7628J	-7607J	-7610J	SINGLES
Pin 1	AC Live	AC Live	AC Live	AC Live
Pin 2	AC Neutral	AC Neutral	AC Neutral	AC Neutral
J2				
Pin 1	+12 V	+12 V	+15 V	+Vout
Pin 2	+5.1 V	+5.1 V	+5.1 V	+Vout
Pin 3	+5.1 V	+5.1 V	+5.1 V	+Vout
Pin 4	Return	Return	Return	Return
Pin 5	Return	Return	Return	Return
Pin 6	-12 V	-5 V	-15 V	Return
P1 ^(e)				
Pin 1	Safety Ground			

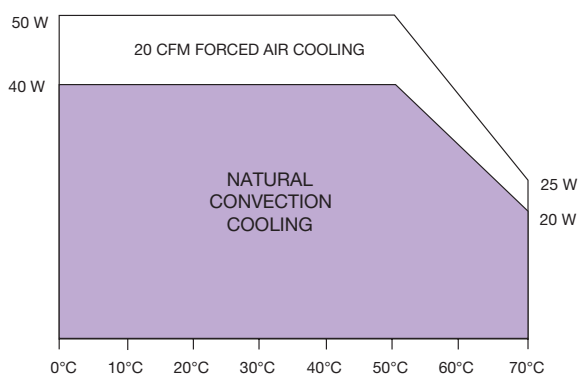DERATING CURVE
Output Power (Watts)

Mechanical Drawings

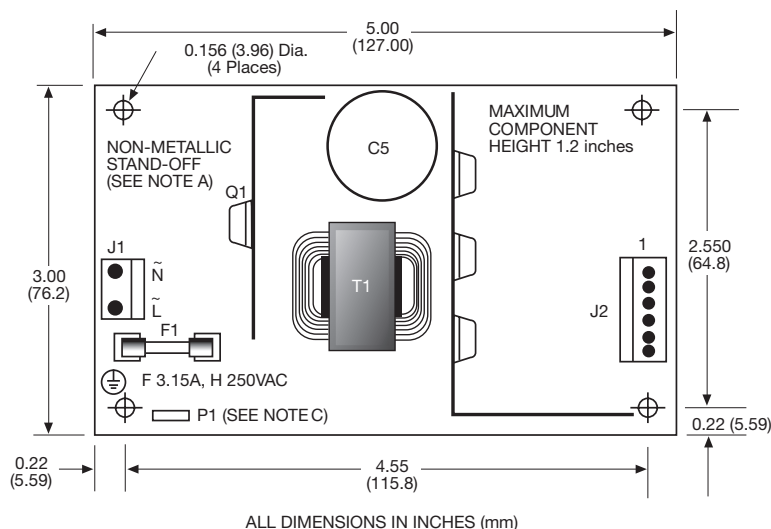

Notes

1. In order to meet safety requirements, a non-metallic stand-off is mandatory for one hole as specified in the mechanical drawing above.
2. The ground pad of the mounting hole near P1 allows system grounding through a metal stand-off.
3. To improve conducted noise, the ground pad of the mounting hole near the output connector should be connected with the ground pad of the mounting hole near P1. Use metal stand-offs attached to a common metal chassis. This connection also significantly attenuates common mode noise.
4. A standard enclosure kit is available for mounting which contains all screws, connectors and necessary mounting hardware. Order part number NFS40CJ.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

NFS40 Series-DS 13Dec2019