
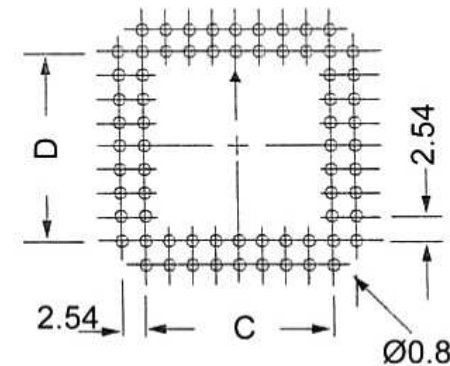
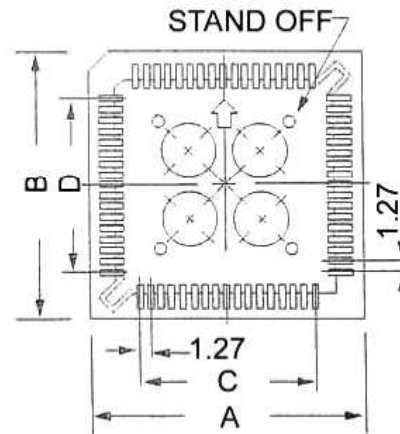


Notes:

Insulator
PBT, UL 94V-0
Contacts
Phosphor Bronze
Matte Tin Plated 150U" over Nickel
Current Rating
1A
Insulating Resistance
10000M ohm Min.
Withstanding Voltage
1000V AC
Contact Resistance
15m ohm Max.
Operating Temperature
-40 Degree to +105 Degree

A-CCSxx-x-R
L1 L2

1. No. of Contacts
20,28,32,44,52,68,84
2. Finish
Z: Tin G: Gold

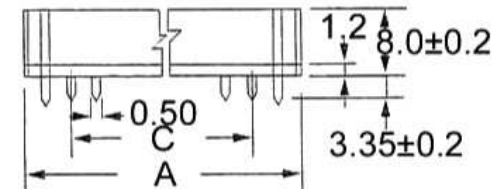

Description

Name:

A-CCSxx-x-R

Chip-carrier-sockets

ASSMANN
Electronic Components

Approval.:

Check.: Ahmaa
Feb.23,06

Draw.: Alex
Feb.23,06

Rev.: 01

Unit: mm

Sheet: 1/1

		Dimension			
No. of Contacts	Qty per tube	A	B	C	D
20	39	15,50	15,50	5,08	5,08
28	33	18,05	18,05	7,62	7,62
32	29	18,05	20,60	7,62	10,16
44	25	23,50	23,50	12,70	12,70
52	23	25,88	25,88	15,24	15,24
68	19	31,66	31,66	20,32	20,32
84	16	36,66	36,66	25,40	25,40