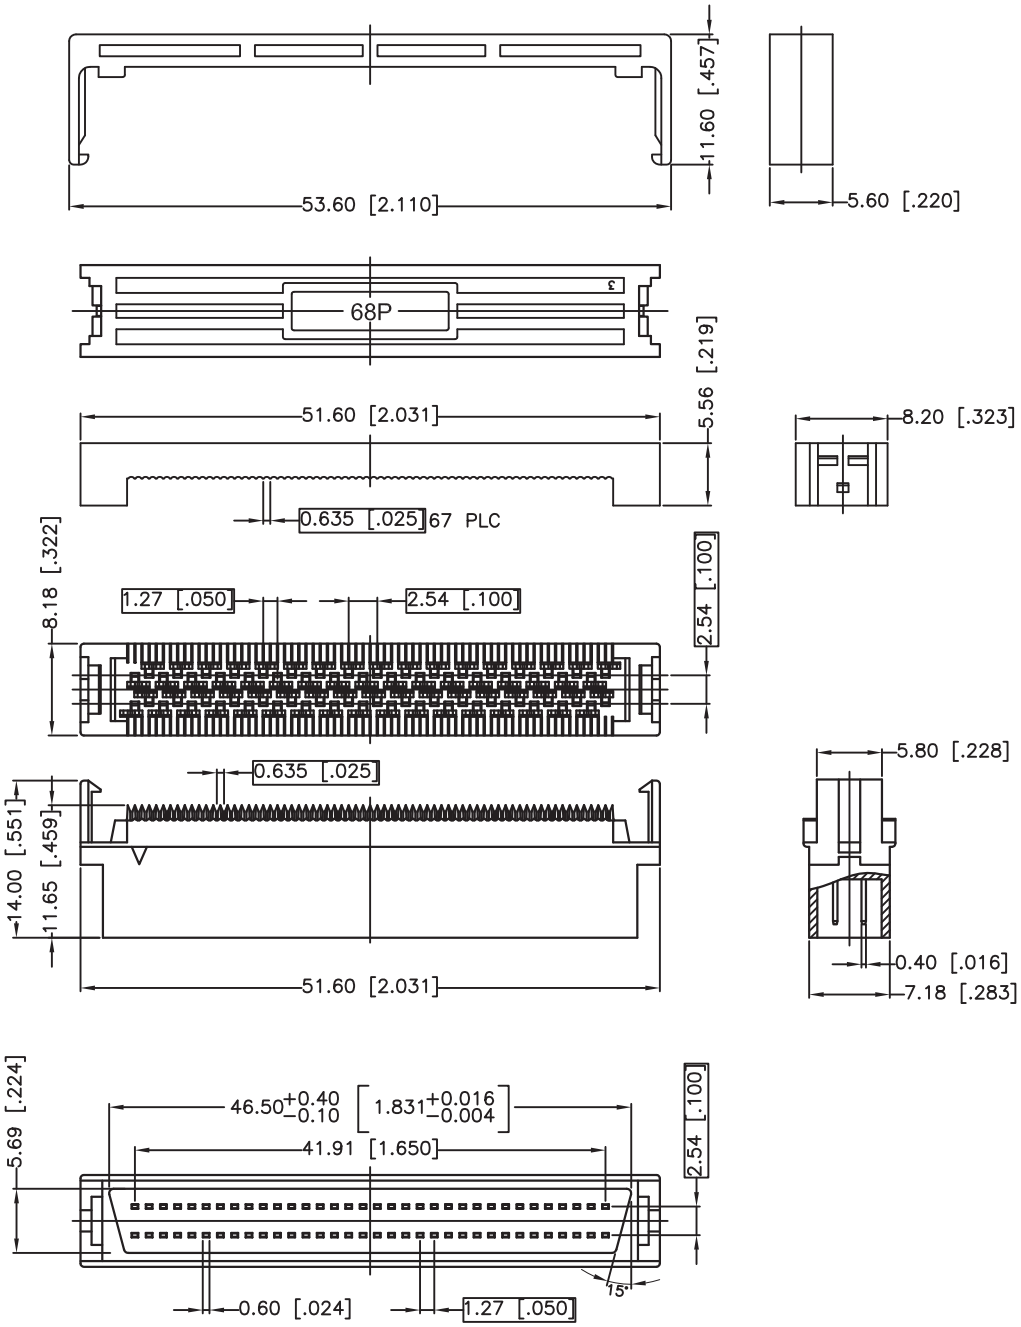

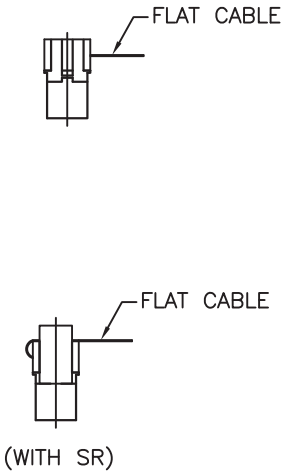

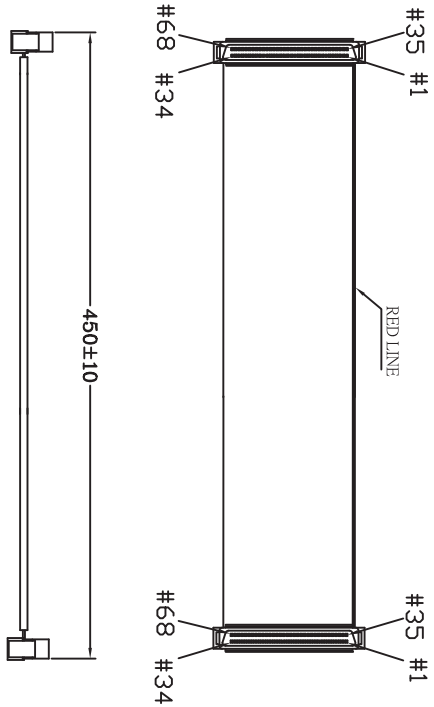

Material:

- Housing: PBT(UL 94V-0)
- Terminal: Copper Alloy
- Gold plated on contact area
- Under nickel plated. (t=0.40MM)

Electrical:

- Current rating: 1A Max.
- Dielectric withstanding voltage: 500V AC R.M.S. for one Min.
- Insulation Resistance: 1,000MΩ Min. @ 500V DC
- Operating Temperature: -40°C ~ +85°C

Unit: MM±0.25MM

RoHS Compliant

ITEM NO.

AK-Y2301-R

TITLE

SCSI II Internal Flat Cable - Unshielded, 68 Pin, Plug IDC, 450MM

ASSMANN Electronics, Inc.
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved