

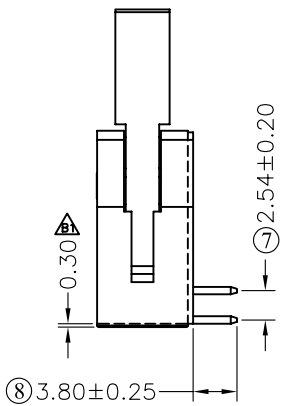
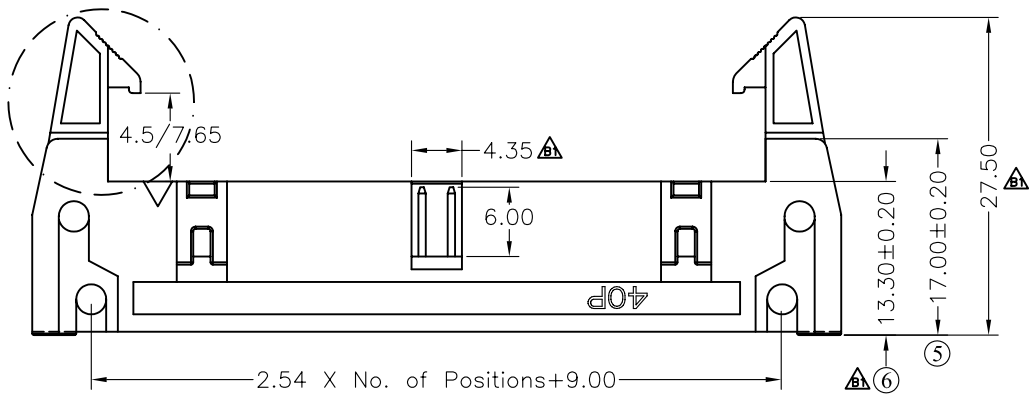
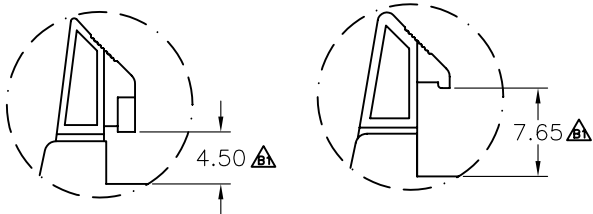


2. 54mm (0. 100") EJECTOR HEADER, RIGHT ANGLE

SPECIFICATIONS

Current Rating: 3AMP
Withstand Voltage: 1000V AC/minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃to+105℃

Contact Material: Brass
Contact plating: Au or Sn Over 50u" Ni
Insulator Material: Polyester (UL94V-0)
Standard: PBT+30 % G. F

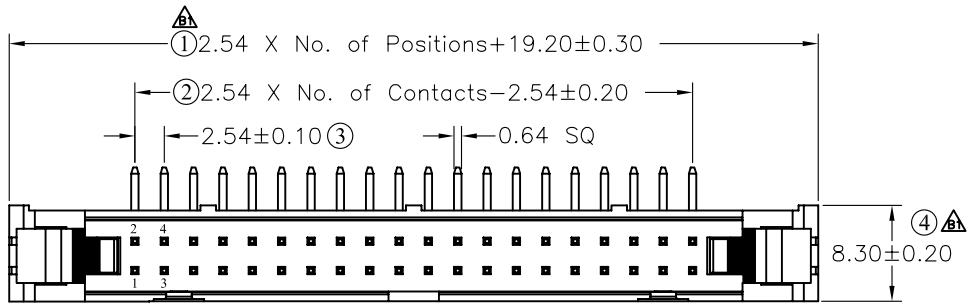

Recommended PCB Board Hole Layout

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
①	+19.30±0.30 → +19.20±0.30	05-07-05	
②	8.30±0.15 → 8.30±0.20		
③	8.50±0.25 → 7.65±0.25		
④	4.30±0.25 → 4.50±0.25		
⑤	4.30±0.25 → 4.35±0.25		
⑥	13.00±0.15 → 13.30±0.20		
⑦	27.80±0.25 → 27.50±0.25		
⑧	0.40±0.25 → 0.30±0.25		
⑨			



TOLERNCE		
X.	± 5°	X.
. X	± 2°	. X ± 0. 38
. XX	± 1°	. XX ± 0. 25
. XXX	± 0. 5°	. XXX ± 0. 12

DRAWN

CHECKED

APPROVE


PROJECT

UNIT

SCALE

EDITION

DATE



MM

B1

05-07-05

PART NO

DRAW NO

NAME

AWHXXA-X2X2-T-R

ASM3210-XXRX01

2.54mm ejector header, right angle

Issue No

PAGE

WF-

1/1