
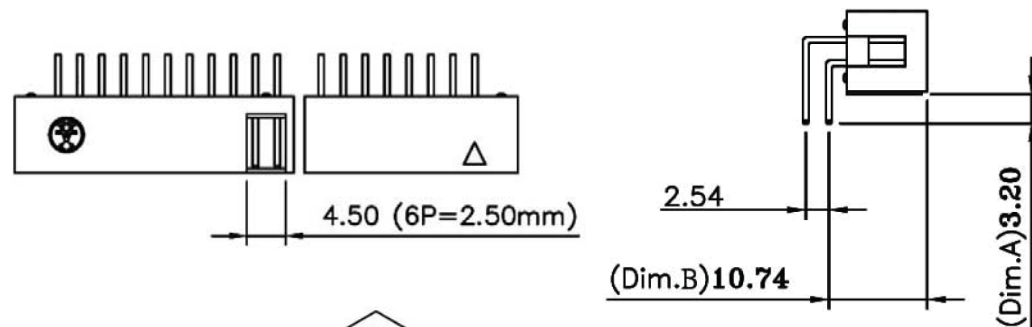


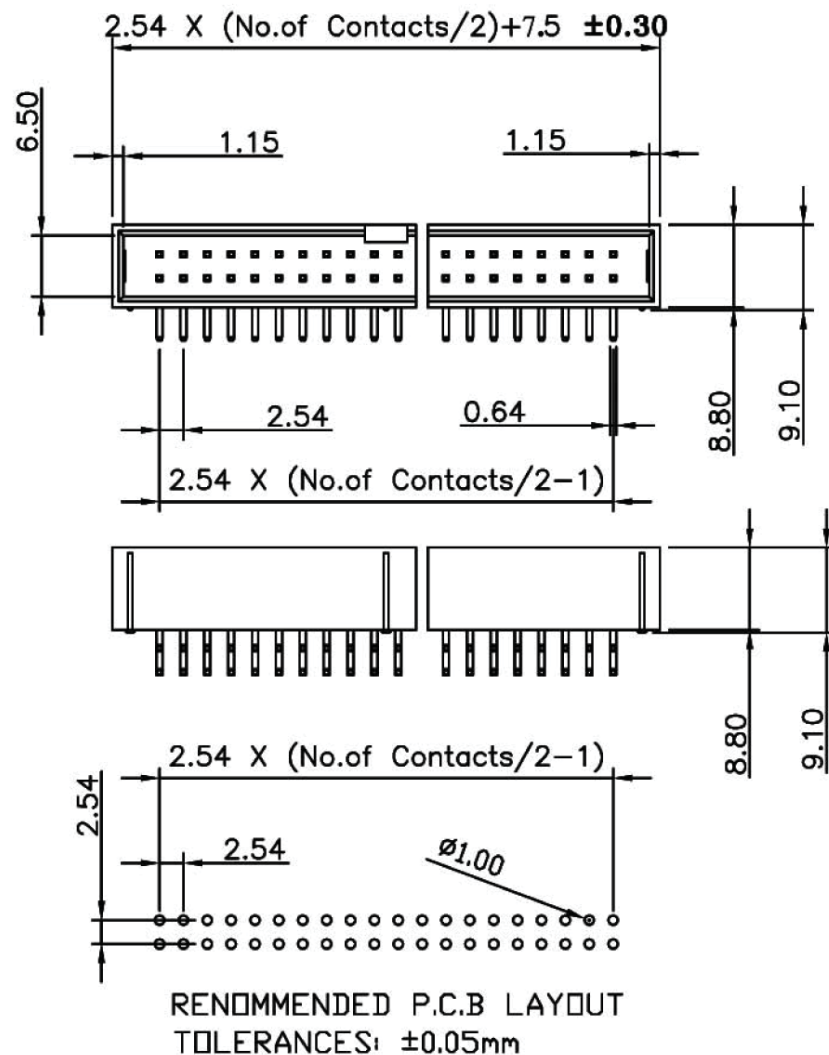

AWHWA-0X02-T-R

Plating:
5 - tin plated
2 - Quality Class III,
Flash gold selective

Number of Contacts:
— 10/14/16/20/26/34
40/50/60/64

Current Rating:	3 Amps
Insulator Resistance:	5000 Megohms min
Dielectric Withstanding:	AC 1000 V
Operating Temperature:	- 40° ~ +105° C
Contact Material:	Copper Alloy
Insulator Material:	Polyester,UL 94V-0
	Standard: PBT

Underplate: Nickel
Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or
100u" Tin/Lead Free(Brighten Tin/Matte Tin)

RECOMMENDED P.C.B LAYOUT
TOLERANCES: $\pm 0.05\text{mm}$



Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	AWHWxA-0x02-T-R
----------	------------------------

Title	Box Header, 2.54MM Pitch, PCB Mount
--------------	--

Drawing No.	
-------------	--

rev00

Replace

Sheet
