# I.D.C. Socket Dual-Row, No SR

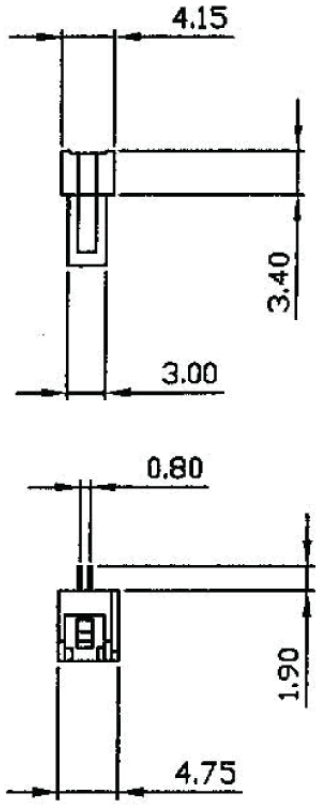


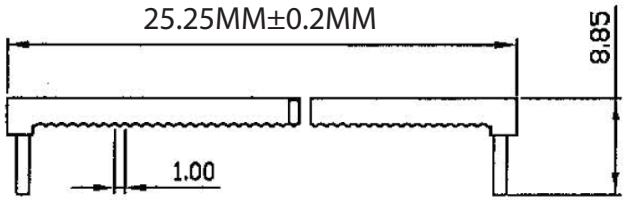


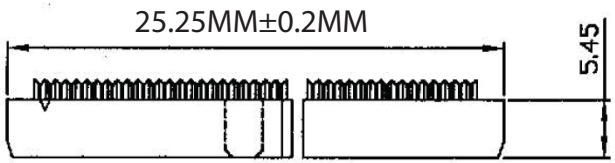


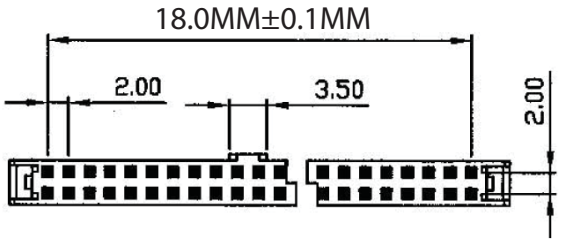




**Materials:**

- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Gold Flash over Nickel

**Electrical:**

- Current Rating: 1 Amp
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding, 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM±0.3MM

RoHS Complaint

| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |

| Modification | Date | Name |
|---|---|---|
| | | |

| | | |
|---|---|---|
| | | Name |
| Drawn | 10.19.11 | Chappell |
| Approved | | |

ASSMANN WSW components

**Item No.** **AWP2-20-7240-T-R**

**Title**
IDC-Socket, Pitch 2.0MM, 20 Contacts
Central Guide Lug w/o Strain Relief, Gold Flash

Drawing No. **rev00**

Replace | Sheet