
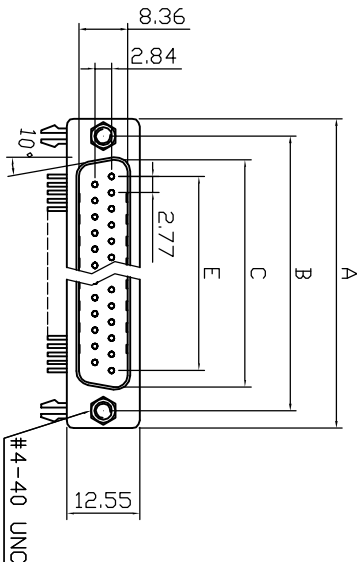
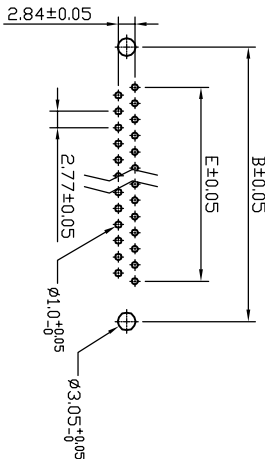
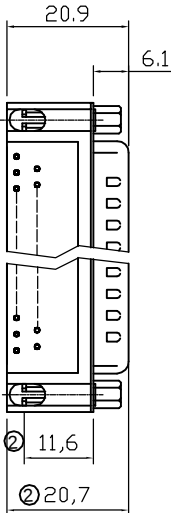



	1	2	3	4	5	6	7																																																																
A	Male   RECOMMENDED PCB LAYOUT ① Solder temp for wave soldering: 220°C ±5°C, 3-5sec. Electrical Contact Resistance: 20mΩ/contact max at 1AMP/DC Insulation Resistance: 1000MΩ at 500VDC Dielectric Withstanding Voltage: 1000VAC/rms 60Hz for 1 minute Current Rating: 3AMP Voltage Rating: 250VAC/rms 60Hz Temperature Range: -20°C ~ 85°C Material Insulator: Glass-Filled thermoplastic PBT, UL94V-0 Shell: Steel 7439-89-6 100μ" Tin over 80μ" min copper Clinch Nut: Copper alloy, Nickel plated Boardlock: Brass, Tin plated Screwlock: Brass, Nickel plated Contact: Phosphor bronze Contact plating: Gold flash full gold ④ Product Specification																																																																						
B																																																																							
C																																																																							
D	   Order Code: A-Dx xx A/KG-xx * on request Contact style: F - Female T - with locking bolts UNC 13 - without locking bolts S - Male No. of Contacts 09 / 15 / 25 / 37 Standard: Quality class III ① Solder temp for wave soldering: 220°C ±5°C, 3-5sec.																																																																						
E	Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th></tr><tr><td>9</td><td>30.81</td><td>24.99</td><td>16.92</td><td>11.08</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>25.25</td><td>19.39</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.96</td><td>33.24</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>55.42</td><td>49.86</td></tr></table>							Positions	A	B	C	E	9	30.81	24.99	16.92	11.08	15	39.20	33.30	25.25	19.39	25	53.05	47.04	38.96	33.24	37	69.40	63.50	55.42	49.86																																							
Positions	A	B	C	E																																																																			
9	30.81	24.99	16.92	11.08																																																																			
15	39.20	33.30	25.25	19.39																																																																			
25	53.05	47.04	38.96	33.24																																																																			
37	69.40	63.50	55.42	49.86																																																																			
F	9.4mm Footprint																																																																						
G	RoHS compliant Unit:mm ③ UL File No.: E198287 <table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>TOLERANCE</td><td></td><td>④</td><td>Edit Product Specification</td><td>28.06.2018</td><td>S.Bölling</td><td>Drawn</td></tr><tr><td>X.</td><td>±0.38</td><td>③</td><td>Add the UL number</td><td>11.12.2015</td><td>Winnie</td><td>Approved</td></tr><tr><td>X.X</td><td>±0.25</td><td>②</td><td>Update the dimension</td><td>27.02.2015</td><td>Winnie</td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td>①</td><td>Add the soldering temperature</td><td>24.01.2014</td><td>Winnie</td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td></td></tr><tr><td>X.°</td><td>±3°</td><td>①</td><td>Modification</td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±1.0°</td><td>①</td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td></td><td></td><td></td><td></td></tr></table> ASSMANN WSM/ components ASSMANN WSM-No. A-Dx xx A/KG-T1/T3 Drawing-No. ASS 4889 CO rev04 Replace Sheet 1/2							Scale	Free						TOLERANCE		④	Edit Product Specification	28.06.2018	S.Bölling	Drawn	X.	±0.38	③	Add the UL number	11.12.2015	Winnie	Approved	X.X	±0.25	②	Update the dimension	27.02.2015	Winnie		X.XX	±0.13	①	Add the soldering temperature	24.01.2014	Winnie		DIM	TOL	①	Drawn	15.08.2012	Lucas		X.°	±3°	①	Modification				X.X°	±1.0°	①					Angle	TOL	Id.					
Scale	Free																																																																						
TOLERANCE		④	Edit Product Specification	28.06.2018	S.Bölling	Drawn																																																																	
X.	±0.38	③	Add the UL number	11.12.2015	Winnie	Approved																																																																	
X.X	±0.25	②	Update the dimension	27.02.2015	Winnie																																																																		
X.XX	±0.13	①	Add the soldering temperature	24.01.2014	Winnie																																																																		
DIM	TOL	①	Drawn	15.08.2012	Lucas																																																																		
X.°	±3°	①	Modification																																																																				
X.X°	±1.0°	①																																																																					
Angle	TOL	Id.																																																																					
H	1 2 3 4 5 6 7																																																																						

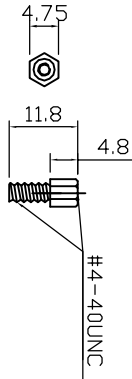