




Isolierkörpermaterial
PBT, UL94V-0
Kontaktmaterial
Phosphorbronze
Kontaktoberfläche
Ni, Au / Sn
Kontaktwiderstand
20mΩ max
Isolationswiderstand
1000MΩ min
Strombelastbarkeit
1.5A
Betriebstemperatur
-20°C - +85°C
Betriebsspannung
40V AC
Prüfspannung
500V AC
Verpackung
Blisterverpackung

Insulator material
PBT, UL94V-0
Contact material
Phosphor bronze
Plating
Ni, Au / Sn
Contact resistance
20mΩ max
Insulation resistance
1000MΩ min
Current rating
1.5A
Operating temperature
-20°C - +85°C
Operating voltage
40V AC
Test voltage
500V AC
Packing
Tray packing

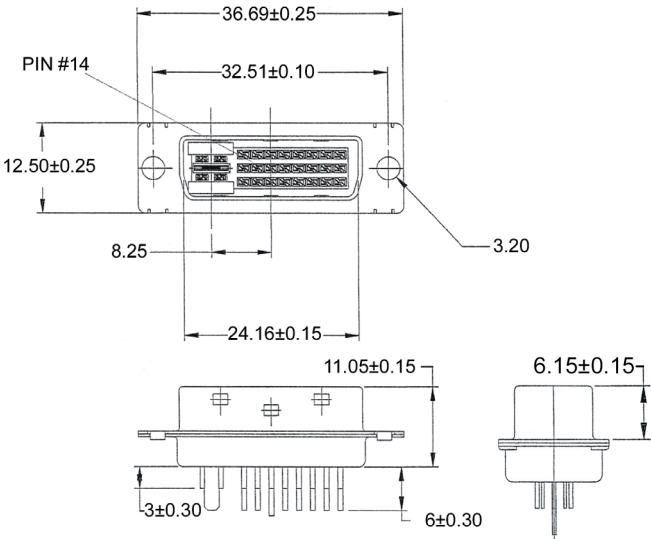

Bestellcode / Ordercode

Polzahlen

24D -24+1
29I -24+4+1

(Digital)
(Integriert)

No. of contacts

24D - 24+1 (digital)
29I - 24+4+1 (integrated)

A - DVI - x

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option

Zubehör: Metallschirm, Kunststoffhaube, Rändelschrauben: A-DVI-KIT-1
Accessory: metal shield, plastic back shell, thumb screws: A-DVI-KIT-1