

## **Product information** CM 02 L 14S-61 P F

https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24363-24365-36153/en/conf/uistate	
Name	CM 02 L 14S-61 P F
	Surface mounted connector, with flange, with filter selection 6 x 1 nF
Delivery informations	
vailability	available
Product description	
Description	Surface mounted connector, with filter selection 6 x 1 nF
уре	CM 02 L 14S-61 P F
Order No.	932 988-100
Number of contacts	6 + PE with with filter
Conductor size	max. 1 mm <sup>2</sup>
Standard	MIL-C 5015 bzw. VG 95 342
lousing Color	black
echnical data	
in dimensions	1.6 mm
Rated voltage	AC/DC 50 V
Rated current	2 A
Contact resistance	<= 5 m0hm
ype of termination	solder
Shell size	14S
Nounting	screws
Material Material	
Contact surface material	Ag
Contact bearer material	PA 66-GF 25
lousing material	PA 66-GF 25
Environmental conditions	
Protection class (IEC 60529)	IP 67
Pollution severity	3
emperature range	-40 °C to +90 °C
Anbauflächentemperatur	up to 100 °C
nflammability class	
lammability, UL standard	94 V-1
acking unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Scope of delivery	1 surface mounted connector
Accessories to order separately	can be plugged into CM 06 EA 14S-61 S; flat gasket CM 02 D 14S, order no. 733 321-002; cap CM 02 SD 14S, order no. 831 620-100; protective cover S






Industrial Connecting Solutions: Circular Connectors: MIL, DIN, Universal Connectors: MIL-C-5015 or VG 95342 Connectors (CM series): Surface mounted connector: CM 02 L 14S-61 P F https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24363-24365-36153/en/conf/uistate

Picture

Drawing

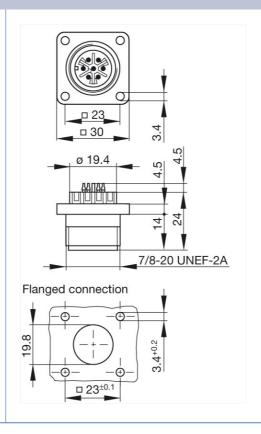

## Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.

The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

