

Product information EF12L OCTOPUS

https://catalog.beldensolutions.com:443/link/57078-24455-49850-24505-39125/en/conf/uistate	
Name	EF12L OCTOPUS
	Industrial ETHERNET M12 socket, "D"-coded according IEC 61076-2-101 for combined front panels and circuit board installation
Delivery informations	
Availability	available
Product description	
Description	Industrial ETHERNET M12 socket,
	"D"-coded according IEC 61076-2-101
	for combined front panels and circuit board installation
Туре	EF12L OCTOPUS
Order No.	934 451-021
Type of contact	female
Number of contacts	4
Data rate	10BASE-T, 100BASE-TX
Standard	IEC 61076-2-101
Housing Color	metallic
Technical data	
Rated voltage	AC/DC 150 V
Rated current	4 A (Derating)
Type of termination	soldering, straight pins
Material	
Contact material	Cu Zn
Contact surface material	Au
Contact bearer material	PA PA
Housing material	Cu Zn/Ni
0-Ring	Viton
Environmental conditions	
Protection class (IEC 60529)	IP 67 / IP65
Pollution severity	3
Temperature range	-25 °C to +90 °C
Approvals	
UL	
Packing unit	
Packaging unit	25
Scope of delivery and accessories	
Accessories to order separately	protective cap M 12 VS,
	order no. 734 209-100
	M12 connector EM12S OCTOPUS,
	order no. 934 445-001
	patchcords EM12S 001Lxxxx OCTOPUS,
	order no. 934 497-xxx






Industrial Ethernet:Waterproof IP67/IP54 Switches:Connecting technology:EF12L OCTOPUS

https://catalog.beldensolutions.com:443/link/57078-24455-49850-24505-39125/en/conf/uistate

Picture

Drawing

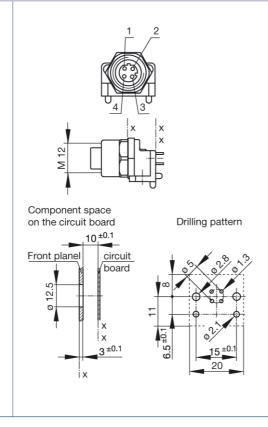

For more information please contact:

Hirschmann Automation and Control GmbH

Stuttgarter Strasse 45-51 72654 Neckartenzlingen Germany

Phone: +49 7127/14-1809 E-Mail: inet-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

