

Product information N11R BM FA F Kunststoff/plastics

https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24367-24373-39798/en/conf/uistate	
Name	N11R BM FA F Kunststoff/plastics
	Surface-mounted connector with flange and filter selection 11 x 1nF,
Delivery informations	Contact meaned connector that hange and man concector 11 x 1111;
Availability	available
Product description	at analytic
Description	Surface-mounted connector with flange and filter selection 11 x 1nF,
Туре	N11R BM FA F Kunststoff/plastics
Order No.	933 100-100
Type of contact	male
Number of contacts	11 + PE
Housing Color	black
Technical data	District
Pin dimensions	1.6 mm
Rated voltage	AC 25 V / DC 50 V
Rated current	5 A
Contact resistance	<= 5 m0hm
Type of termination	solder, solid pins
Mounting	flange
Material	nanye
Contact surface material	Ag
Contact bearer material	PET
Housing material	Zn Al/Ni
Environmental conditions	Z.H. P.W.YI
Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C
Packing unit	-40 V U T T U V
Packaging unit	50 pieces
Scope of delivery and accessories	oo proces
Accessories to order separately	can be plugged into N11R EF S;
Accessories to order separately	protective cover SHK 2,
	order no. 733 845-001




Downloaded from Arrow.com.



Industrial Connecting Solutions: Circular Connectors: MIL, DIN, Universal Connectors: DIN 43651 Connectors (NR series): Surface mounted connector: N11R BM FA F Kunststoff/plastics https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24367-24373-39798/en/conf/uistate

Picture

Drawing

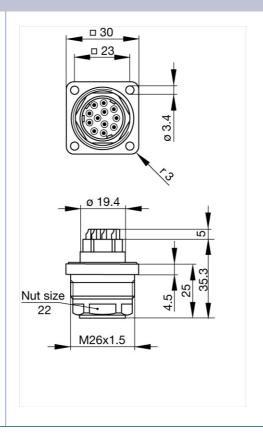

Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

