

M8-Receptacle Connectors In Accordance With IEC 61076-2-104


RSMHL.../S 5.5 | RKMHL.../S 5.5



Male, 3- and 4-Pole

Receptacle connector, M8 male connector for back mounting, printed contacts, chassis side thread M10 x 1 (panel nut included).

RSMHL.../S 5.5

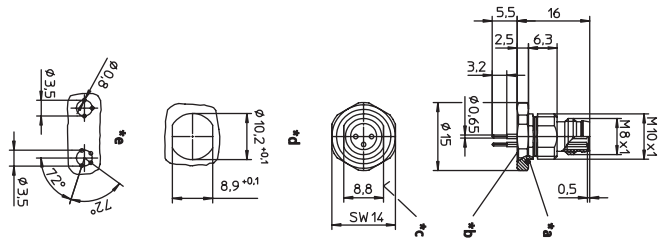


- *a O-ring
- *b solder contacts potted with epoxy
- *c anti-rotation protection
- *d cut out for anti-rotation
- *e hole pattern in printed circuit board



Female, 3- and 4-Pole

Receptacle connector, M8 female connector for back mounting, printed contacts, chassis side thread M10 x 1 (panel nut included).

RKMHL.../S 5.5

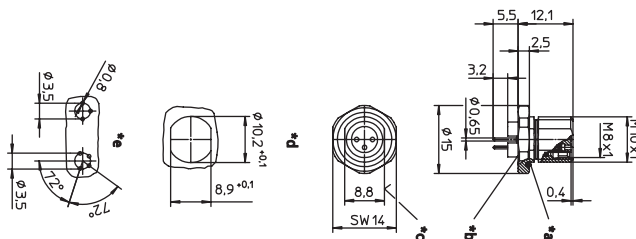


- *a O-ring
- *b solder contacts potted with epoxy
- *c anti-rotation protection
- *d cut out for anti-rotation
- *e hole pattern in printed circuit board


Pin Assignments

Face Views

M8 - 3 poles



M8 - 4 poles





Be Certain with Belden

M8-Receptacle Connectors In Accordance With IEC 61076-2-104

RSMHL.../S 5.5 | RKMHL.../S 5.5

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated
Insert RSMHL: PA
RKMHL: TPU, self-extinguishing
Contact CuZn, pre-nickel and
0.8 microns gold-plated
O-ring FKM

Electrical

Contact resistance $\leq 5 \text{ m}\Omega$
Nominal current at 40°C 4 A
Nominal voltage 3 poles 60 V
4 poles 30 V
encapsulated
Test voltage 1.5 kV eff. / 60 s
Insulation resistance $> 10^9 \Omega$
Pollution degree 3

Part Number		Pins	Characteristics
RSMHL 3/S 5,5	RKMHL 3/S 5,5	3	
RSMHL 4/S 5,5	RKMHL 4/S 5,5	4	