

LDC240 Series

240W DIN Rail Switching Power Supply

LDC240 Series is a single phase, ultra compact DIN Rail Switching Power Supply with active PFC, ideal for many applications.

Its compact size, high efficiency, excellent reliability together with easy installation makes it ideal for various industrial applications.

LDC240 Series is Class I isolation device suitable for SELV and PELV circuitry (up to 48 VDC models) and is designed to be mounted on DIN rail and installed inside a protective enclosure.



Key Features & Benefits

- High efficiency and extremely compact size
- Only 40 mm width aluminum enclosure
- Active PFC
- Overload 150%
- Constant current or hiccup mode limitation, user settable
- Wide range of output voltage
- Easy parallelable for power increase
- Up to 70°C operating temperature with no derating

Applications

- Industrial Control
- Communication
- Instrumentation Equipment



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL ¹	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	SUFFIX OPTION
LDC240-12	120 - 240 VAC (110 - 345 VDC)	12 VDC	15 A	Includes internal ORing diode Enhanced transient overvoltage protection (> 6kV)
LDC240-12P				
LDC240-12H*				
LDC240-24	120 - 240 VAC (110 - 345 VDC)	24 VDC	10 A	Includes internal ORing diode Enhanced transient overvoltage protection (> 6kV)
LDC240-24P				
LDC240-24H*				
LDC240-36	120 - 240 VAC (110 - 345 VDC))	36 VDC	7 A	Includes internal ORing diode Enhanced transient overvoltage protection (> 6kV)
LDC240-36P				
LDC240-36H*				
LDC240-48P	120 - 240 VAC (110 - 345 VDC)	48 VDC	5 A	Includes internal ORing diode Enhanced transient overvoltage protection (> 6kV)
LDC240-48H*				
LDC240-72P	120 - 240 VAC (110 - 345 VDC)	72 VDC	3.3 A	Includes internal ORing diode Enhanced transient overvoltage protection (> 6kV)
LDC240-72H*				

* For models with suffix H consult factory.

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 240 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range	Rated, UL certified Operating	120 – 240 VAC 90 - 264 VAC
Input DC Voltage Range	Rated	110 - 345 VDC
Input Frequency Range		47 - 63 Hz
Input AC Current	LDC240-12 / LDC240-24	2.4 A
	LDC240-36	3.0 A
	LDC240-48 / LDC240-72	2.4 A
	LDC240-12 / LDC240-24	1.2 A
	LDC240-36	1.5 A
	LDC240-48 / LDC240-72	1.2 A
Input DC Current	LDC240-12	2.5 A
	LDC240-24	2.6 A
	LDC240-36	2.5 A
	LDC240-48 / LDC240-72	2.6 A
	LDC240-12	1.2 A
	LDC240-24	0.9 A
	LDC240-36	1.2 A
	LDC240-48 / LDC240-72	0.9 A
Power Factor Correction	Active	> 0.9
Inrush Peak Current		≤ 50 A
Touch (Leakage) Current		≤ 0.6 mA
Internal Protection Fuse	Not user replaceable	6.3 AT
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations.	Fuse 10 AT or MCB 10 A C curve

¹ Models with suffix H and LDC240-36P are not UL508 certified.

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		240 W
Rated Voltage (Adjustable Output Voltage Range)	LDC240-12	12 VDC (12 - 15 VDC)
	LDC240-24	24 VDC (22 - 29 VDC)
	LDC240-36	36 VDC (32 - 40 VDC)
	LDC240-48	48 VDC (45 - 55 VDC)
	LDC240-72	72 VDC (70 - 85 VDC)
Continuous Current	LDC240-12	15 A
	LDC240-24	10 A
	LDC240-36	7.5 A
	LDC240-48	5 A
	LDC240-72	3.3 A
Overload Limit (Constant Current Mode)	LDC240-12	17 A
	LDC240-24	11 A
	LDC240-36	7.5 A
	LDC240-48	7 A
	LDC240-72	4 A
Overload Limit (Hiccup mode) (max. 5 s)	LDC240-12	20 A
	LDC240-24	15 A
	LDC240-36	10 A
	LDC240-48	8.5 A
	LDC240-72	5.5 A
Load Regulation	LDC240-12	≤ 2%
	LDC240-24 / LDC240-36 / LDC240-48 / LDC240-72	≤ 1%
Ripple & Noise ²	LDC240-12	≤ 160 mVpp
	LDC240-24 / LDC240-36	≤ 260 mVpp
	LDC240-48	≤ 400 mVpp
	LDC240-72	≤ 550 mVpp
Hold up Time	LDC240-12	≥ 25 ms
	LDC240-24 / LDC240-48	≥ 20 ms
	LDC240-36 / LDC240-72	≥ 15 ms
Protections	Overload, short circuit, with constant current or hiccup mode (user settable)	
	Thermal protection	
	Input undervoltage lockout	
Output Over Voltage Protection	Output overvoltage	
	LDC240-12	≥ 18 VDC
	LDC240-24	≥ 33 VDC
	LDC240-36	≥ 51 VDC
	LDC240-48	≥ 68 VDC
	LDC240-72	≥ 100 VDC
Status Signals	DC OK - green LED	
	OVERLOAD - red LED	
	DC OK - dry contact (NO, 24 VDC / 1 A)	
Parallel Connection ³	Possible for power or redundancy (with external ORing module)	
	P (models) - include internal ORing circuit	
Efficiency	LDC240-12	> 90%
	LDC240-24 / LDC240-36	> 93%
	LDC240-48 / LDC240-72	> 93.5%
Dissipated Power	LDC240-12	< 25 W
	LDC240-24 / LDC240-36	< 19 W
	LDC240-48 / LDC240-72	< 17 W

NOTE: Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range.
Contact factory for details.

² Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

³ Pay attention, set the current limitation mode jumper on C.C. mode when connecting more units in parallel.

4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS


PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature ⁴	UL certificated up to 70°C	- 40° to + 70°C
Storage Temperature		- 40° to + 80°C
Derating	No derating	
Humidity	Non condensing	5 - 95% RH
Life Time Expectancy	At 25°C ambient, full load	221288 h (25.2 years)
MTBF	MIL-HDBK-217F, at 25°C ambient full load	> 600'000 h
Overvoltage Category	EN50178	III
Pollution Degree	IEC60664-1	2
Protection Class		Class I
Isolation Voltage	Input to Output Input to Ground Output to Ground	4.2 kVDC 2.2 kVDC 0.75 kVDC
Safety Standards & Approvals	UL508 (certified) EN60950 (reference) EN50178 (reference)	
EMC Standards	Emission	EN55011 (CISPR11) EN55022 (CISPR22) EN61000-3-2
		Class B Class B Class A
		Level 3 Level 3 Level 4 Level 4 Level 2
	Immunity	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-11
		Level 3 Level 3 Level 4 Level 4 Level 2
		Level 3 Level 3 Level 4 Level 4 Level 2
Protection Degree	EN60529	IP20
Vibration Sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2 g 2 Hours / axis (X,Y,Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total

5. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		600 g
Dimensions (W x H x D)		40 x 115 x 110 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	2.5 mm ² , screw type pluggable (24 - 12 AWG)	
Case Material	Aluminum	

⁴ Start-up type tested: - 40°C, possible at nominal voltage with load deration

6. PIN LAYOUT & DESCRIPTION

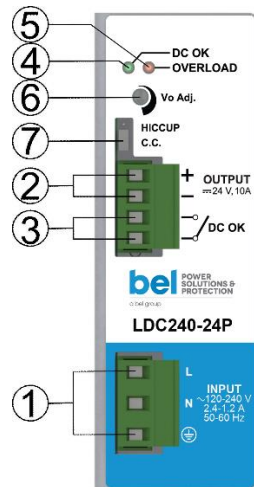

PIN	DESCRIPTION
1	AC/DC input
2	DC output (load)
3	Diagnostic Output (dry contact, NC output OK)
4	Green LED: Output OK
5	Red LED: Overload
6	Output voltage adjustment
7	Selectable limitation mode (Hiccup mode, C.C. mode)

INPUT CONNECTION	OUTPUT CONNECTION
Single phase: L = Line N = Neutral ⊕ = Earth ground	+ = Positive DC - = Negative DC
DC: L = + Positive DC N = - Negative DC ⊕ = Earth ground	Signaling: DC OK: dry contact NO COM

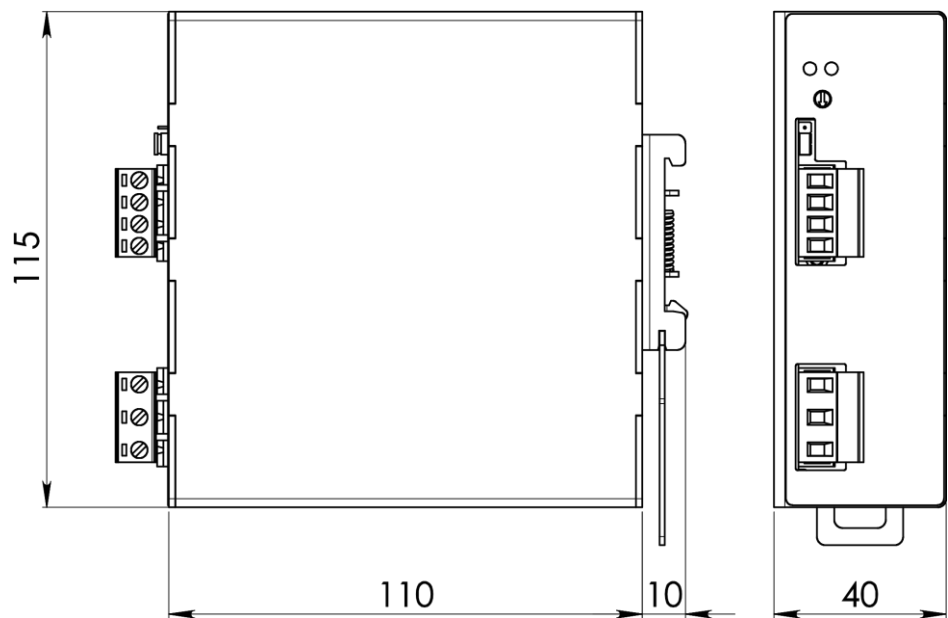


Figure 1. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

© 2018 Bel Power Solutions & Protection

BCD.00756_AC