

THT Labels: PermaSleeve® Wire Marking Sleeves

www.BradyID.com

B-7642 PermaSleeve® 2HX Polyolefin Wire Marking Sleeves:

Double-Sided Printable, 2" Sleeve Width (Continued from previous page)

Part Number	Sleeves Per Roll	Pieces Per Roll	Approx. Wire Gauge	Range of Wire Diameter Inch (mm) Min. Max.	Supplied Diameter Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeve Width Inch (mm)	Rec. Printer	Rec. Ribbon
2HX-1000-2-WT-J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	2.000 (50.8)	PR Plus Printer	R4300/ R6602
2HX-1000-2-WT-J**	2,500	--	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus Printer	R4300/ R6602
2HX-1000-2-YL-J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	2.000 (50.8)	PR Plus Printer	R4300/ R6602
2HX-1000-2-YL-J**	2,500	--	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus Printer	R4300/ R6602
2HX-1500-2-WT	250	250	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-1500-2*	250	250	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-1500-2-WT-S	100	100	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-1500-2-YL-S	100	100	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-1500-2-WT-J	1,000	1,000	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-1500-2-YL-J	1,000	1,000	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2-WT	100	100	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2*	100	100	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2-WT-S	50	50	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2-YL-S	50	50	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2-WT-J	1,000	1,000	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602
2HX-2000-2-YL-J	1,000	1,000	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	2.000 (50.8)	PR Plus, BBP72	R4300/ R6602

B-7642 PermaSleeve® HX Polyolefin Wire Marking Sleeves:

Use the table below to browse all available single-sided printing, 3" width B-7642 PermaSleeve® HX Polyolefin Wire Marking Sleeves or build your own part number on page 120.

Single-Sided Printable, 3" Sleeve Width

Part Number	Sleeves Per Roll	Pieces Per Roll	Approx. Wire Gauge	Range of Wire Diameter Inch (mm) Min. Max.	Supplied Diameter Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeve Width Inch (mm)	Rec. Printer	Rec. Ribbon
HX-1000-3-WT	250	250	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1000-3*	250	250	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1000-3-WT-J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1000-3-YL-J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1500-3-WT	250	250	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1500-3*	250	250	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1500-3-WT-J	1,000	1,000	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-1500-3-YL-J	1,000	1,000	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-2000-3-WT	100	100	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-2000-3*	100	100	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-2000-3-WT-J	1,000	1,000	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602
HX-2000-3-YL-J	1,000	1,000	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	3.000 (76.2)	PR Plus	R4300/ R6602

*Choosing Your PermaSleeve Color

You may also choose to order your PermaSleeve HX 2" or 3" wire marking sleeves in the colors listed below. Replace the singular asterisk (*) with the abbreviation of the desired color.

Example: HX-094-2*-4 becomes HX-094-2-**RD**-4

Available Stock Colors:

BK = Black GR = Green RD = Red YL = Yellow
BL = Blue GY = Gray VT = Violet WT = White
BR = Brown OR = Orange

** Choosing Your PermaSleeve Pieces (optional):

While 1 marker per sleeve is standard, you may also choose to have each 2" sleeve slit multiple times to produce multiple pieces. Replace the double asterisks (**) in the part number to fill in your desired pieces per marker.

Example: HX-187-2-WT-** becomes HX-187-2-WT-4


This "4" means that this 2.000" sleeve is slit into four 0.500" pieces.

Standard Option:

1 marker per sleeve

Other Available Slit Options:

2, 3 or 4 markers per sleeve

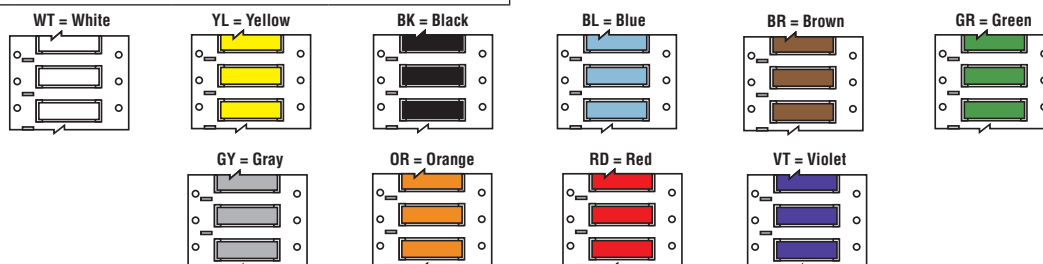

See all benchtop printer ribbon parts on page 152 and full material descriptions on pages 164-170.

Approx. wire gauge based on AWG for THHN wire.

1-888-272-3946 | www.BradyID.com