

THT Labels: General Identification

www.BradyID.com

3" Core General ID Labels:

B-407 Polyolefin Labels

Color: Clear Finish: Matte

Clear polyolefin label for general purpose labeling using thermal transfer technology. Its matte finish offers a "no label" look on matte surfaces. Can be used as an overlamine. Not recommended for outdoor use.




Figure 3




Figure 6




Figure 9



Diagram	Part Number	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 9	THT-17-407-3	Polyolefin	Clear	2.000 (50.8)	1.000 (25.4)	1.125 (28.6)	2.200 (55.9)	1	3,000	R4902
Fig. 3	THT-21-407	Polyolefin	Clear	3.000 (76.2)	300 ft. (91.4 m)	300 ft. (91.4 m)	3.200 (81.3)	1	1 Roll Cont.	R4900

3" Core General ID Labels:

B-408 Paper Labels

Color: White Finish: Matte

General purpose paper label for thermal transfer printing. White with matte finish and removable adhesive. Can be repositioned or removed.




Figure 2

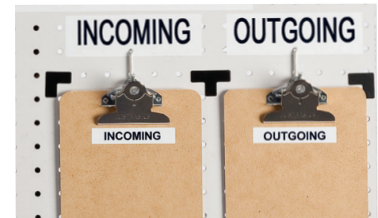


Diagram	Part Number	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 2	THT-17-408-3	Paper	White	2.000 (50.8)	1.000 (25.4)	1.125 (28.6)	2.200 (55.9)	1	3,000	R6100
Fig. 2	THT-18-408-3	Paper	White	3.000 (76.2)	1.000 (25.4)	1.125 (28.6)	3.200 (81.3)	1	3,000	R6102
Fig. 2	THT-19-408-1	Paper	White	3.000 (76.2)	2.000 (50.8)	2.125 (54.0)	3.200 (81.3)	1	1,000	R6102
Fig. 2	THT-20-408-1	Paper	White	3.000 (76.2)	5.000 (127.0)	5.125 (130.2)	3.200 (81.3)	1	1,000	R6102
Fig. 2	THT-25-408-1	Paper	White	4.000 (101.6)	6.000 (152.4)	6.125 (155.6)	4.200 (106.7)	1	1,000	R6107
Fig. 2	THT-55-408-1	Paper	White	4.000 (101.6)	2.000 (50.8)	2.125 (54.0)	4.200 (106.7)	1	1,000	R6107
Fig. 2	THT-78-408-1	Paper	White	4.000 (101.6)	6.500 (165.1)	6.625 (168.3)	4.200 (106.7)	1	1,000	R6107

3" Core General ID Labels:

B-422 Polyester Labels

Color: White Finish: Gloss

White label stock with glossy finish and 2 mils of adhesive for rough surface applications, including low surface energy plastics. Designed to withstand solvent exposure. UL rated for surfaces commonly used in solar panel manufacturing. Also used for component identification, barcoding, and asset and inventory tracking.




Figure 1




Figure 2



Diagram	Part Number	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 1	THT-148-422-10	Polyester	White	0.500 (12.7)	0.375 (9.5)	0.600 (15.2)	0.475 (12.1)	2.500 (63.5)	4	10,000	R6002
Fig. 1	THT-149-422-10	Polyester	White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.625 (15.9)	2.500 (63.5)	4	10,000	R6002
Fig. 1	THT-36-422-10	Polyester	White	0.500 (12.7)	0.200 (5.1)	0.625 (15.9)	0.300 (7.6)	3.200 (81.3)	5	10,000	R6002
Fig. 1	THT-3-422-10	Polyester	White	1.000 (25.4)	0.375 (9.5)	1.075 (27.3)	0.475 (12.1)	3.350 (85.1)	3	10,000	R6007
Fig. 1	THT-5-422-10	Polyester	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	10,000	R6007
Fig. 2	THT-102-422-10	Polyester	White	1.500 (38.1)	0.370 (9.4)	-	0.500 (12.7)	1.700 (43.2)	1	10,000	R6000
Fig. 1	THT-147-422-10	Polyester	White	1.500 (38.1)	0.375 (9.5)	1.650 (41.9)	0.475 (12.1)	3.350 (85.1)	2	10,000	R6007
Fig. 1	THT-37-422-10	Polyester	White	1.500 (38.1)	0.500 (12.7)	1.650 (41.9)	0.600 (15.2)	3.350 (85.1)	2	10,000	R6007
Fig. 2	THT-17-422-3	Polyester	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	3,000	R6000
Fig. 2	THT-7-422-3	Polyester	White	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	3,000	R6002
Fig. 2	THT-18-422-3	Polyester	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	3,000	R6002
Fig. 2	THT-19-422-1	Polyester	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	1,000	R6002
Fig. 2	THT-76-422-1	Polyester	White	4.000 (101.6)	3.000 (76.2)	-	3.125 (79.4)	4.200 (106.7)	1	1,000	R6007

See all benchtop printer ribbon parts on page 152 and full material descriptions on pages 164-170.

1-888-272-3946 | www.BradyID.com