



Bridgelux® Vero® SE 18 Array

Product Data Sheet DS122



BXRC-27x4000	30x4000	35x4000	40x4000	50x4001	57x4001	65x4001
--------------	---------	---------	---------	---------	---------	---------

Introduction

Vero SE



Vero SE represents a state of the art COB solution with revolutionary advancements in LED integration technology. Vero SE's innovative light source system integrates Bridgelux's seventh generation COB technology with poke-in connectivity that enables solder free installation. Vero SE LED light sources streamline assembly processes, lower manufacturing cost, simplify luminaire design, improve light quality and increase design flexibility.

Vero SE includes poke-in connectivity simplifies manufacturing and assembly processes by eliminating the need to solder. Secondary connector and holder components are not required, allowing for rapid integration of arrays into fixtures and an efficient field replaceable solution.

Vero SE is available in four different light emitting surface (LES) configurations and has been engineered to reliably operate over a broad current range, enabling new degrees of flexibility in luminaire design optimization. Vero SE arrays deliver increased lumen density for improved beam control and precision lighting with 2 and 3 SDCM color control standards for clean and consistent uniform lighting.

Features

- Poke-in connectivity
- Efficacy of 153 lm/W typical
- Vero SE 18 lumen output performance ranges from 1.944 to 12.835 lumens
- Broad range of CCT options from 2700K to 6500K
- CRI options: minimum 70, 80, and 90
- Color control: 2 and 3 SDCM for 2700K-4000K CCT
- 4 SDCM standard for 5000K-6500K CCT
- Reliable operation at up to 2X nominal drive current
- Radial die pattern and improved lumen density
- Top side part number markings
- No exposed solder pads or electrical connections

Benefits

- Poke-in connectivity enables solderless, connector free installation
- Broad application coverage for interior and exterior lighting
- Flexibility for application driven lighting design requirements
- High quality, true color reproduction
- Uniform consistent white light
- Flexibility in design optimization
- Improved optical control
- Enhanced ease of use and manufacturability
- Ability to configure multiple arrays in series and parallel reduces customer driver cost
- Improved inventory management and quality control




Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	7
Electrical Characteristics	13
Eye Safety	14
Absolute Maximum Ratings	15
Performance Curves	16
Typical Radiation Pattern	21
Typical Color Spectrum	22
Mechanical Dimensions	23
Color Binning Information	24
Packaging and Labeling	25
Design Resources	27
Precautions	27
Disclaimers	27
About Bridgelux	28

Product Feature Map


Vero SE 18 is the second largest form factor in the product family of next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications,

Vero SE incorporates several features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please visit www.bridgelux.com for more information on the Vero SE family of products.

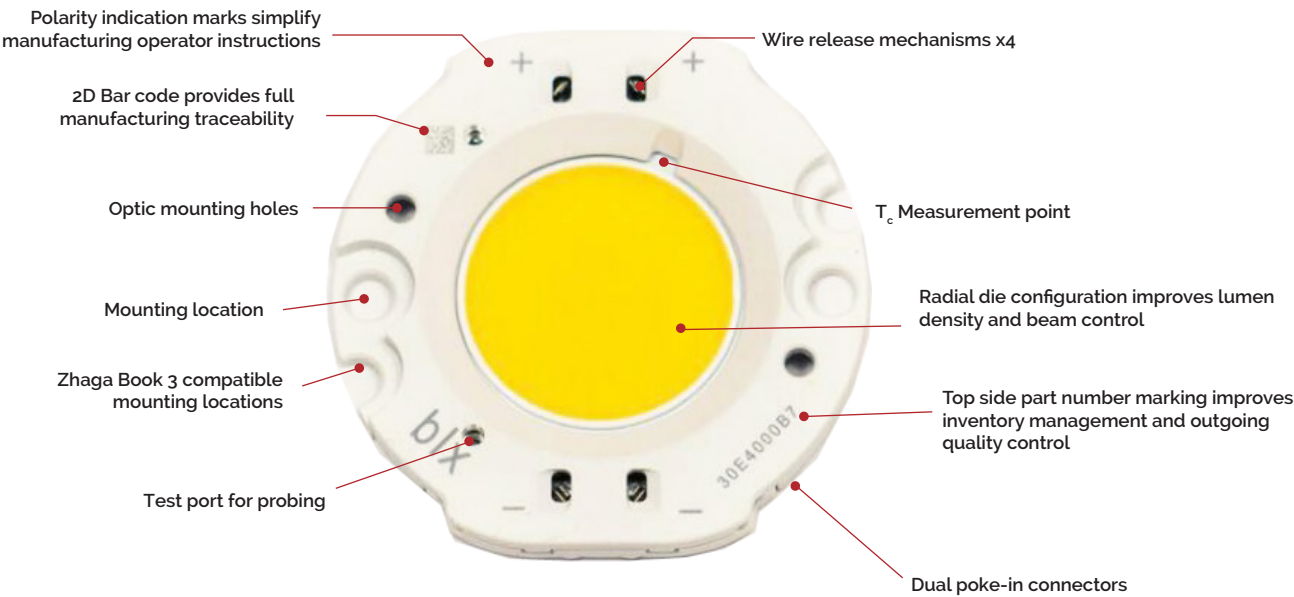

Product Nomenclature

The part number designation for Bridgelux Vero SE LED arrays is explained as follows:

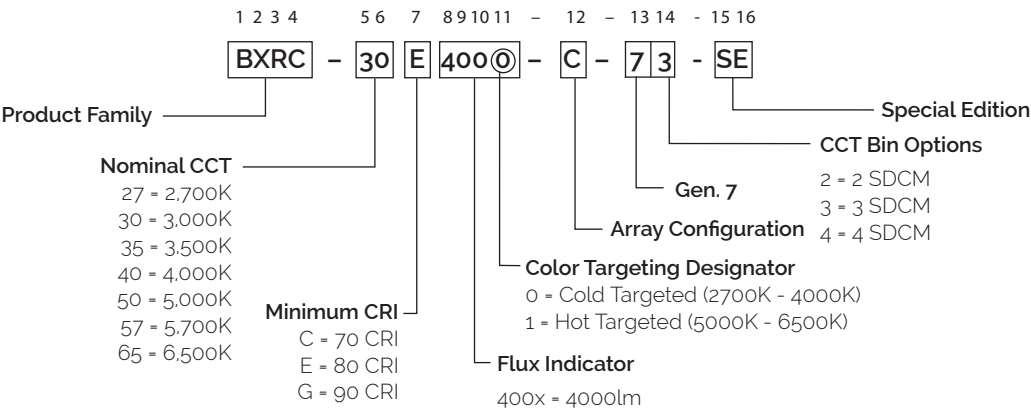

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data ($T_j = T_c = 25^\circ\text{C}$)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical Pulsed Flux ^{4,5,6} $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux ^{6,7} $T_c = 25^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E4000-B-7X-SE	2700	80	900	4584	4126	35.0	31.5	146
BXRC-27E4000-C-7X-SE	2700	80	1170	5960	5363	35.0	41.0	146
BXRC-27E4000-D-7X-SE	2700	80	1050	4457	4011	29.0	30.5	146
BXRC-27G4000-B-7X-SE	2700	90	900	3820	3438	35.0	31.5	121
BXRC-27G4000-C-7X-SE	2700	90	1170	4967	4470	35.0	41.0	121
BXRC-27G4000-D-7X-SE	2700	90	1050	3714	3343	29.0	30.5	122
BXRC-30E4000-B-7X-SE	3000	80	900	4819	4297	35.0	31.5	153
BXRC-30E4000-C-7X-SE	3000	80	1170	6265	5587	35.0	41.0	153
BXRC-30E4000-D-7X-SE	3000	80	1050	4658	4178	29.0	30.5	153
BXRC-30G4000-B-7X-SE	3000	90	900	3963	3567	35.0	31.5	126
BXRC-30G4000-C-7X-SE	3000	90	1170	5153	4638	35.0	41.0	126
BXRC-30G4000-D-7X-SE	3000	90	1050	3853	3467	29.0	30.5	127
BXRC-35E4000-B-7X-SE	3500	80	900	4918	4426	35.0	31.5	156
BXRC-35E4000-C-7X-SE	3500	80	1170	6394	5755	35.0	41.0	156
BXRC-35E4000-D-7X-SE	3500	80	1050	4782	4303	29.0	30.5	157
BXRC-35G4000-B-7X-SE	3500	90	900	4106	3695	35.0	31.5	130
BXRC-35G4000-C-7X-SE	3500	90	1170	5339	4805	35.0	41.0	130
BXRC-35G4000-D-7X-SE	3500	90	1050	3992	3593	29.0	30.5	131
BXRC-40E4000-B-7X-SE	4000	80	900	4966	4469	35.0	31.5	158
BXRC-40E4000-C-7X-SE	4000	80	1170	6456	5810	35.0	41.0	158
BXRC-40E4000-D-7X-SE	4000	80	1050	4828	4345	29.0	30.5	159
BXRC-40G4000-B-7X-SE	4000	90	900	4249	3825	35.0	31.5	135
BXRC-40G4000-C-7X-SE	4000	90	1170	5525	4973	35.0	41.0	135
BXRC-40G4000-D-7X-SE	4000	90	1050	4132	3718	29.0	30.5	136
BXRC-50C4001-B-74-SE	5000	70	900	5443	4898	35.0	31.5	173
BXRC-50C4001-C-74-SE	5000	70	1170	7077	6369	35.0	41.0	173
BXRC-50C4001-D-74-SE	5000	70	1050	5292	4763	29.0	30.5	174
BXRC-50E4001-B-74-SE	5000	80	900	5117	4605	35.0	31.5	162
BXRC-50E4001-C-74-SE	5000	80	1170	6653	5987	35.0	41.0	162
BXRC-50E4001-D-74-SE	5000	80	1050	4975	4477	29.0	30.5	163

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with CCTs 5000K-6500K are not targeted to 85°C.
2. CRI Values are minimums. Minimum R_g value at $T_j = T_c = 25^\circ\text{C}$ for 80 CRI products is 0, the minimum R_g values for warm white and neutral white 90 CRI products is 60, the minimum R_g values for cool white 90 CRI products is 50.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) = T_c (case temperature) = 25°C .
5. Typical performance values are provided as a reference only and not a guarantee of performance.
6. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
7. Minimum flux values at the nominal test current are guaranteed by 100% test.

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data ($T_j = T_c = 25^\circ\text{C}$) (continued)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical Pulsed Flux ^{4,5,6} $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux ^{6,7} $T_c = 25^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-50G4001-B-74-SE	5000	90	900	4354	3919	35.0	31.5	138
BXRC-50G4001-C-74-SE	5000	90	1170	5662	5096	35.0	41.0	138
BXRC-50G4001-D-74-SE	5000	90	1050	4234	3811	29.0	30.5	139
BXRC-57C4001-B-74-SE	5700	70	900	5252	4727	35.0	31.5	167
BXRC-57C4001-C-74-SE	5700	70	1170	6829	6146	35.0	41.0	167
BXRC-57C4001-D-74-SE	5700	70	1050	5107	4595	29.0	30.5	168
BXRC-57E4001-B-74-SE	5700	80	900	5204	4684	35.0	31.5	165
BXRC-57E4001-C-74-SE	5700	80	1170	6767	6090	35.0	41.0	165
BXRC-57E4001-D-74-SE	5700	80	1050	5060	4554	29.0	30.5	166
BXRC-65C4001-B-74-SE	6500	70	900	5348	4813	35.0	31.5	170
BXRC-65C4001-C-74-SE	6500	70	1170	6953	6258	35.0	41.0	170
BXRC-65C4001-D-74-SE	6500	70	1050	5199	4679	29.0	30.5	171
BXRC-65E4001-B-74-SE	6500	80	900	5300	4770	35.0	31.5	168
BXRC-65E4001-C-74-SE	6500	80	1170	6891	6202	35.0	41.0	168
BXRC-65E4001-D-74-SE	6500	80	1050	5153	4638	29.0	30.5	169

Notes for Tables 1:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to 85°C .
2. CRI Values are minimums. Minimum Rg value at $T_j = T_c = 25^\circ\text{C}$ for 80 CRI products is 0, the minimum Rg values for warm white and neutral white 90 CRI products is 60, the minimum Rg values for cool white 90 CRI products is 50.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) - T_c (case temperature) = 25°C .
5. Typical performance values are provided as a reference only and not a guarantee of performance.
6. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
7. Minimum flux values at the nominal test current are guaranteed by 100% test.

Product Selection Guide

The following product configurations are available:

Table 2: Selection Guide, Stabilized DC Performance ($T_c = 85^\circ\text{C}$) ^{4,5}

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical DC Flux $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux ⁶ $T_c = 85^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E4000-B-7X-SE	2700	80	900	4125	3713	34.1	30.7	134
BXRC-27E4000-C-7X-SE	2700	80	1170	5364	4827	34.1	39.9	134
BXRC-27E4000-D-7X-SE	2700	80	1050	4011	3610	28.3	29.7	135
BXRC-27G4000-B-7X-SE	2700	90	900	3438	3094	34.1	30.7	112
BXRC-27G4000-C-7X-SE	2700	90	1170	4470	4023	34.1	39.9	112
BXRC-27G4000-D-7X-SE	2700	90	1050	3342	3009	28.3	29.7	113
BXRC-30E4000-B-7X-SE	3000	80	900	4337	3868	34.1	30.7	141
BXRC-30E4000-C-7X-SE	3000	80	1170	5638	5029	34.1	39.9	141
BXRC-30E4000-D-7X-SE	3000	80	1050	4193	3760	28.3	29.7	141
BXRC-30G4000-B-7X-SE	3000	90	900	3567	3210	34.1	30.7	116
BXRC-30G4000-C-7X-SE	3000	90	1170	4637	4174	34.1	39.9	116
BXRC-30G4000-D-7X-SE	3000	90	1050	3468	3121	28.3	29.7	117
BXRC-35E4000-B-7X-SE	3500	80	900	4426	3983	34.1	30.7	144
BXRC-35E4000-C-7X-SE	3500	80	1170	5755	5180	34.1	39.9	144
BXRC-35E4000-D-7X-SE	3500	80	1050	4303	3873	28.3	29.7	145
BXRC-35G4000-B-7X-SE	3500	90	900	3696	3326	34.1	30.7	120
BXRC-35G4000-C-7X-SE	3500	90	1170	4805	4324	34.1	39.9	120
BXRC-35G4000-D-7X-SE	3500	90	1050	3593	3233	28.3	29.7	121
BXRC-40E4000-B-7X-SE	4000	80	900	4469	4022	34.1	30.7	146
BXRC-40E4000-C-7X-SE	4000	80	1170	5811	5229	34.1	39.9	146
BXRC-40E4000-D-7X-SE	4000	80	1050	4345	3910	28.3	29.7	146
BXRC-40G4000-B-7X-SE	4000	90	900	3825	3442	34.1	30.7	125
BXRC-40G4000-C-7X-SE	4000	90	1170	4973	4475	34.1	39.9	125
BXRC-40G4000-D-7X-SE	4000	90	1050	3719	3346	28.3	29.7	125
BXRC-50C4001-B-74-SE	5000	70	900	4899	4409	34.1	30.7	160
BXRC-50C4001-C-74-SE	5000	70	1170	6370	5732	34.1	39.9	160
BXRC-50C4001-D-74-SE	5000	70	1050	4763	4287	28.3	29.7	160
BXRC-50E4001-B-74-SE	5000	80	900	4605	4145	34.1	30.7	150
BXRC-50E4001-C-74-SE	5000	80	1170	5987	5388	34.1	39.9	150
BXRC-50E4001-D-74-SE	5000	80	1050	4477	4029	28.3	29.7	151

Notes for Tables 2:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to 85°C .
2. CRI Values are minimums. Minimum R_g value at $T_1 = T_c = 25^\circ\text{C}$ for 80 CRI products is 0, the minimum R_g values for warm white and neutral white 90 CRI products is 60, the minimum R_g values for cool white 90 CRI products is 50.
3. Drive current is referred to as nominal drive current.
4. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.
5. Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
6. Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Product Selection Guide

The following product configurations are available:

Table 2: Selection Guide, Stabilized DC Performance ($T_c = 85^\circ\text{C}$) ^{4,5} (continued)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical DC Flux $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux ⁶ $T_c = 85^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-50G4001-B-74-SE	5000	90	900	3919	3527	34.1	30.7	128
BXRC-50G4001-C-74-SE	5000	90	1170	5096	4586	34.1	39.9	128
BXRC-50G4001-D-74-SE	5000	90	1050	3810	3430	28.3	29.7	128
BXRC-57C4001-B-74-SE	5700	70	900	4727	4254	34.1	30.7	154
BXRC-57C4001-C-74-SE	5700	70	1170	6146	5531	34.1	39.9	154
BXRC-57C4001-D-74-SE	5700	70	1050	4596	4136	28.3	29.7	155
BXRC-57E4001-B-74-SE	5700	80	900	4684	4216	34.1	30.7	153
BXRC-57E4001-C-74-SE	5700	80	1170	6090	5481	34.1	39.9	153
BXRC-57E4001-D-74-SE	5700	80	1050	4554	4099	28.3	29.7	153
BXRC-65C4001-B-74-SE	6500	70	900	4813	4331	34.1	30.7	157
BXRC-65C4001-C-74-SE	6500	70	1170	6258	5632	34.1	39.9	157
BXRC-65C4001-D-74-SE	6500	70	1050	4679	4211	28.3	29.7	158
BXRC-65E4001-B-74-SE	6500	80	900	4770	4293	34.1	30.7	155
BXRC-65E4001-C-74-SE	6500	80	1170	6202	5582	34.1	39.9	155
BXRC-65E4001-D-74-SE	6500	80	1050	4638	4174	28.3	29.7	156

Notes for Tables 2:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to 85°C .
2. CRI Values are minimums. Minimum Rg value at $T_j = T_c = 25^\circ\text{C}$ for 80 CRI products is 0, the minimum Rg values for warm white and neutral white 90 CRI products is 60, the minimum Rg values for cool white 90 CRI products is 50.
3. Drive current is referred to as nominal drive current.
4. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.
5. Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
6. Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Performance at Commonly Used Drive Currents

Vero SE LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. Vero SE may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-27E4000-B-7X-SE	80	450	33.3	15.0	2461	2211	164
		600	33.9	20.4	3228	2896	159
		900	35.0	31.5	4584	4125	146
		1350	36.7	49.5	6817	6007	138
		1800	38.0	68.4	8773	7626	128
BXRC-27E4000-C-7X-SE	80	585	33.4	19.5	3114	2947	160
		780	34.0	26.5	4081	3781	154
		1170	35.0	41.0	5960	5364	146
		1755	36.8	64.5	8574	7546	133
		2340	38.1	89.3	10998	9479	123
BXRC-27E4000-D-7X-SE	80	525	27.7	14.6	2374	2204	163
		700	28.2	19.8	3087	2829	156
		1050	29.0	30.5	4457	4011	146
		1575	30.4	47.9	6366	5629	133
		2100	31.5	66.2	8104	7047	122
BXRC-27G4000-B-7X-SE	90	450	33.3	15.0	2051	1843	137
		600	33.9	20.4	2690	2413	132
		900	35.0	31.5	3820	3438	121
		1350	36.7	49.5	5681	5006	115
		1800	38.0	68.4	7311	6355	107
BXRC-27G4000-C-7X-SE	90	585	33.4	19.5	2595	2456	133
		780	34.0	26.5	3400	3151	128
		1170	35.0	41.0	4967	4470	121
		1755	36.8	64.5	7145	6289	111
		2340	38.1	89.3	9165	7899	103
BXRC-27G4000-D-7X-SE	90	525	27.7	14.6	1978	1836	136
		700	28.2	19.8	2573	2358	130
		1050	29.0	30.5	3714	3342	122
		1575	30.4	47.9	5305	4691	111
		2100	31.5	66.2	6753	5872	102

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-30E4000-B-7X-SE	80	450	33.3	15.0	2587	2325	172
		600	33.9	20.4	3394	3044	167
		900	35.0	31.5	4819	4337	153
		1350	36.7	49.5	7167	6315	145
		1800	38.0	68.4	9223	8017	135
BXRC-30E4000-C-7X-SE	80	585	33.4	19.5	3273	3098	168
		780	34.0	26.5	4289	3975	162
		1170	35.0	41.0	6265	5638	153
		1755	36.8	64.5	9012	7932	140
		2340	38.1	89.3	11560	9964	130
BXRC-30E4000-D-7X-SE	80	525	27.7	14.6	2482	2303	170
		700	28.2	19.8	3227	2957	163
		1050	29.0	30.5	4658	4193	153
		1575	30.4	47.9	6654	5884	139
		2100	31.5	66.2	8470	7366	128
BXRC-30G4000-B-7X-SE	90	450	33.3	15.0	2128	1912	142
		600	33.9	20.4	2791	2503	137
		900	35.0	31.5	3963	3567	126
		1350	36.7	49.5	5894	5193	119
		1800	38.0	68.4	7585	6593	111
BXRC-30G4000-C-7X-SE	90	585	33.4	19.5	2692	2548	138
		780	34.0	26.5	3528	3269	133
		1170	35.0	41.0	5153	4637	126
		1755	36.8	64.5	7413	6524	115
		2340	38.1	89.3	9508	8195	107
BXRC-30G4000-D-7X-SE	90	525	27.7	14.6	2053	1905	141
		700	28.2	19.8	2669	2446	135
		1050	29.0	30.5	3853	3468	127
		1575	30.4	47.9	5504	4867	115
		2100	31.5	66.2	7006	6093	106
BXRC-35E4000-B-7X-SE	80	450	33.3	15.0	2640	2373	176
		600	33.9	20.4	3464	3107	170
		900	35.0	31.5	4918	4426	156
		1350	36.7	49.5	7314	6445	148
		1800	38.0	68.4	9412	8182	138
BXRC-35E4000-C-7X-SE	80	585	33.4	19.5	3341	3162	171
		780	34.0	26.5	4378	4057	165
		1170	35.0	41.0	6394	5755	156
		1755	36.8	64.5	9199	8097	143
		2340	38.1	89.3	11800	10170	132
BXRC-35E4000-D-7X-SE	80	525	27.7	14.6	2547	2364	175
		700	28.2	19.8	3312	3035	168
		1050	29.0	30.5	4782	4303	157
		1575	30.4	47.9	6830	6039	143
		2100	31.5	66.2	8694	7561	131

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-35G4000-B-7X-SE	90	450	33.3	15.0	2205	1981	147
		600	33.9	20.4	2892	2594	142
		900	35.0	31.5	4106	3696	130
		1350	36.7	49.5	6107	5381	123
		1800	38.0	68.4	7859	6832	115
BXRC-35G4000-C-7X-SE	90	585	33.4	19.5	2790	2640	143
		780	34.0	26.5	3656	3388	138
		1170	35.0	41.0	5339	4805	130
		1755	36.8	64.5	7681	6760	119
		2340	38.1	89.3	9852	8491	110
BXRC-35G4000-D-7X-SE	90	525	27.7	14.6	2127	1974	146
		700	28.2	19.8	2766	2534	140
		1050	29.0	30.5	3992	3593	131
		1575	30.4	47.9	5703	5043	119
		2100	31.5	66.2	7259	6313	110
BXRC-40E4000-B-7X-SE	80	450	33.3	15.0	2666	2396	178
		600	33.9	20.4	3497	3137	172
		900	35.0	31.5	4966	4469	158
		1350	36.7	49.5	7385	6507	149
		1800	38.0	68.4	9504	8261	139
BXRC-40E4000-C-7X-SE	80	585	33.4	19.5	3373	3193	173
		780	34.0	26.5	4421	4097	167
		1170	35.0	41.0	6456	5811	158
		1755	36.8	64.5	9288	8175	144
		2340	38.1	89.3	11914	10269	133
BXRC-40E4000-D-7X-SE	80	525	27.7	14.6	2572	2387	177
		700	28.2	19.8	3344	3065	169
		1050	29.0	30.5	4828	4345	159
		1575	30.4	47.9	6896	6098	144
		2100	31.5	66.2	8779	7634	133
BXRC-40G4000-B-7X-SE	90	450	33.3	15.0	2282	2050	152
		600	33.9	20.4	2993	2684	147
		900	35.0	31.5	4249	3825	135
		1350	36.7	49.5	6320	5569	128
		1800	38.0	68.4	8133	7070	119
BXRC-40G4000-C-7X-SE	90	585	33.4	19.5	2887	2732	148
		780	34.0	26.5	3783	3506	143
		1170	35.0	41.0	5525	4973	135
		1755	36.8	64.5	7949	6996	123
		2340	38.1	89.3	10196	8788	114
BXRC-40G4000-D-7X-SE	90	525	27.7	14.6	2201	2043	151
		700	28.2	19.8	2862	2623	145
		1050	29.0	30.5	4132	3719	136
		1575	30.4	47.9	5902	5219	123
		2100	31.5	66.2	7513	6533	113

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-50C4001-B-74-SE	70	450	33.3	15.0	2922	2626	195
		600	33.9	20.4	3834	3438	188
		900	35.0	31.5	5443	4899	173
		1350	36.7	49.5	8096	7133	164
		1800	38.0	68.4	10418	9056	152
BXRC-50C4001-C-74-SE	70	585	33.4	19.5	3698	3499	189
		780	34.0	26.5	4846	4490	183
		1170	35.0	41.0	7077	6370	173
		1755	36.8	64.5	10181	8961	158
		2340	38.1	89.3	13060	11256	146
BXRC-50C4001-D-74-SE	70	525	27.7	14.6	2819	2617	194
		700	28.2	19.8	3666	3360	186
		1050	29.0	30.5	5292	4763	174
		1575	30.4	47.9	7559	6684	158
		2100	31.5	66.2	9623	8368	145
BXRC-50E4001-B-74-SE	80	450	33.3	15.0	2747	2468	183
		600	33.9	20.4	3604	3232	177
		900	35.0	31.5	5117	4605	162
		1350	36.7	49.5	7610	6705	154
		1800	38.0	68.4	9793	8512	143
BXRC-50E4001-C-74-SE	80	585	33.4	19.5	3476	3290	178
		780	34.0	26.5	4555	4221	172
		1170	35.0	41.0	6653	5987	162
		1755	36.8	64.5	9570	8424	148
		2340	38.1	89.3	12276	10581	138
BXRC-50E4001-D-74-SE	80	525	27.7	14.6	2650	2460	182
		700	28.2	19.8	3446	3158	174
		1050	29.0	30.5	4975	4477	163
		1575	30.4	47.9	7106	6283	148
		2100	31.5	66.2	9046	7866	137
BXRC-50G4001-B-74-SE	90	450	33.3	15.0	2338	2101	156
		600	33.9	20.4	3067	2751	151
		900	35.0	31.5	4354	3919	138
		1350	36.7	49.5	6476	5706	131
		1800	38.0	68.4	8334	7245	122
BXRC-50G4001-C-74-SE	90	585	33.4	19.5	2958	2800	152
		780	34.0	26.5	3877	3592	146
		1170	35.0	41.0	5662	5096	138
		1755	36.8	64.5	8145	7169	126
		2340	38.1	89.3	10448	9005	117
BXRC-50G4001-D-74-SE	90	525	27.7	14.6	2255	2093	155
		700	28.2	19.8	2933	2688	148
		1050	29.0	30.5	4234	3810	139
		1575	30.4	47.9	6047	5348	126
		2100	31.5	66.2	7698	6694	116

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-57C4001-B-74-SE	70	450	33.3	15.0	2820	2534	188
		600	33.9	20.4	3699	3318	182
		900	35.0	31.5	5252	4727	167
		1350	36.7	49.5	7811	6883	158
		1800	38.0	68.4	10052	8738	147
BXRC-57C4001-C-74-SE	70	585	33.4	19.5	3568	3377	183
		780	34.0	26.5	4676	4333	176
		1170	35.0	41.0	6829	6146	167
		1755	36.8	64.5	9824	8647	152
		2340	38.1	89.3	12602	10861	141
BXRC-57C4001-D-74-SE	70	525	27.7	14.6	2720	2525	187
		700	28.2	19.8	3537	3242	179
		1050	29.0	30.5	5107	4596	168
		1575	30.4	47.9	7294	6450	152
		2100	31.5	66.2	9285	8074	140
BXRC-57E4001-B-74-SE	80	450	33.3	15.0	2794	2511	186
		600	33.9	20.4	3665	3288	180
		900	35.0	31.5	5204	4684	165
		1350	36.7	49.5	7740	6820	156
		1800	38.0	68.4	9961	8659	146
BXRC-57E4001-C-74-SE	80	585	33.4	19.5	3536	3346	181
		780	34.0	26.5	4633	4294	175
		1170	35.0	41.0	6767	6090	165
		1755	36.8	64.5	9735	8568	151
		2340	38.1	89.3	12487	10762	140
BXRC-57E4001-D-74-SE	80	525	27.7	14.6	2696	2502	185
		700	28.2	19.8	3505	3212	177
		1050	29.0	30.5	5060	4554	166
		1575	30.4	47.9	7228	6391	151
		2100	31.5	66.2	9201	8001	139
BXRC-65C4001-B-74-SE	70	450	33.3	15.0	2871	2580	191
		600	33.9	20.4	3766	3378	185
		900	35.0	31.5	5348	4813	170
		1350	36.7	49.5	7954	7008	161
		1800	38.0	68.4	10235	8897	150
BXRC-65C4001-C-74-SE	70	585	33.4	19.5	3633	3438	186
		780	34.0	26.5	4761	4412	180
		1170	35.0	41.0	6953	6258	170
		1755	36.8	64.5	10003	8804	155
		2340	38.1	89.3	12831	11059	144
BXRC-65C4001-D-74-SE	70	525	27.7	14.6	2770	2571	190
		700	28.2	19.8	3602	3301	182
		1050	29.0	30.5	5199	4679	171
		1575	30.4	47.9	7427	6567	155
		2100	31.5	66.2	9454	8221	143

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-65E4001-B-74-SE	80	450	33.3	15.0	2846	2557	190
		600	33.9	20.4	3733	3348	183
		900	35.0	31.5	5300	4770	168
		1350	36.7	49.5	7883	6945	159
		1800	38.0	68.4	10143	8817	148
BXRC-65E4001-C-74-SE	80	585	33.4	19.5	3600	3407	184
		780	34.0	26.5	4718	4372	178
		1170	35.0	41.0	6891	6202	168
		1755	36.8	64.5	9913	8725	154
		2340	38.1	89.3	12716	10960	142
BXRC-65E4001-D-74-SE	80	525	27.7	14.6	2745	2548	189
		700	28.2	19.8	3569	3271	181
		1050	29.0	30.5	5153	4638	169
		1575	30.4	47.9	7360	6508	154
		2100	31.5	66.2	9370	8148	142

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and not a guarantee of performance.

Electrical Characteristics

Table 4: Electrical Characteristics

-Part Number	Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^{\circ}\text{C}$ (V) ^{1, 2, 3, 8}			Typical Coefficient of Forward Voltage ⁴ $\Delta V_f / \Delta T_c$ (mV/ $^{\circ}\text{C}$)	Typical Thermal Resistance Junction to Case ^{5,6} R_{j-c} ($^{\circ}\text{C}/\text{W}$)	Driver Selection Voltages ⁷ (V)	
		Minimum	Typical	Maximum			V_f Min. Hot $T_c = 105^{\circ}\text{C}$ (V)	V_f Max. Cold $T_c = -40^{\circ}\text{C}$ (V)
BXRC-xxx400x-B-7x-SE	900	32.4	35.0	37.6	-14.9	0.15	31.2	38.6
	1800	35.2	38.0	40.9	-14.9	0.19	34.0	41.8
BXRC-xxx400x-C-7x-SE	1170	32.4	35.0	37.6	-14.9	0.11	31.2	38.6
	2340	35.3	38.1	41.0	-14.9	0.13	34.1	42.0
BXRC-xxx400x-D-7x-SE	1050	26.8	29.0	31.2	-12.2	0.16	25.8	32.0
	2100	29.2	31.5	33.9	-12.2	0.19	28.2	34.7

Notes for Table 4:

1. Parts are tested in pulsed conditions, $T_c = 25^{\circ}\text{C}$. Pulse width is 10ms.
2. Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
3. Bridgelux maintains a tester tolerance of $\pm 0.10\text{V}$ on forward voltage measurements.
4. Typical coefficient of forward voltage tolerance is $\pm 0.1\text{mV}$ for nominal current.
5. Thermal resistance values are based from test data of a 3000K 80 CRI product.
6. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
7. V_f min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
8. This product has been designed and manufactured per IEC 62031:2014. This product has passed dielectric withstand voltage testing at 1160 V. The working voltage designated for the insulation is 80V d.c. The maximum allowable voltage across the array must be determined in the end product application.

Eye Safety

Table 5: Eye Safety Classifications

Part Number	Drive Current ⁴ (mA)	CCT ^{1, 4}			
		2700K/3000K	4000K	5000K ²	6500K ³
BXRC-xxx400x-B-7x-SE	900	RG1	RG1	RG1	RG1
	1350	RG1	RG1	RG1	RG2
	1800	RG1	RG1	RG2	RG2
BXRC-xxx400x-C-7x-SE	1170	RG1	RG1	RG1	RG1
	1755	RG1	RG1	-	RG2
	2340	RG1	RG1	-	RG2
BXRC-xxx400x-D-7x-SE	1050	RG1	RG1	RG1	RG1
	1575	RG1	RG1	RG1	RG2
	2100	RG1	RG1	RG2	RG2

Notes for Table 5:

1. Eye safety classification for the use of Bridgelux Vero SE Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 5000K, E_{thr} = 1315.8 lx.
3. For products classified as RG2 at 6500K, E_{thr} = 1224.5 lx.
4. Please contact your Bridgelux sales representative for E_{thr} values at specific drive currents and CCTs not listed.

Absolute Maximum Ratings

Table 6: Maximum Ratings

Parameter	Maximum Rating		
LED Junction Temperature (T_j)	125°C		
Storage Temperature	-40°C to +105°C		
Operating Case Temperature ¹ (T_c)	105°C		
	BXRC-xxx400x-B-7x-SE	BXRC-xxx400x-C-7x-SE	BXRC-xxx400x-D-7x-SE
Maximum Drive Current ²	1800mA	2340mA	2100mA
Maximum Peak Pulsed Drive Current ³	2570mA	3340mA	3000mA
Maximum Reverse Voltage ⁴	-60V	-60V	-50V

Notes for Table 6:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Arrays may be driven at higher currents however lumen maintenance may be reduced.
3. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
4. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

Performance Curves

Figure 1: Vero SE 18B Drive Current vs. Voltage ($T_j = T_c = 25^\circ\text{C}$)


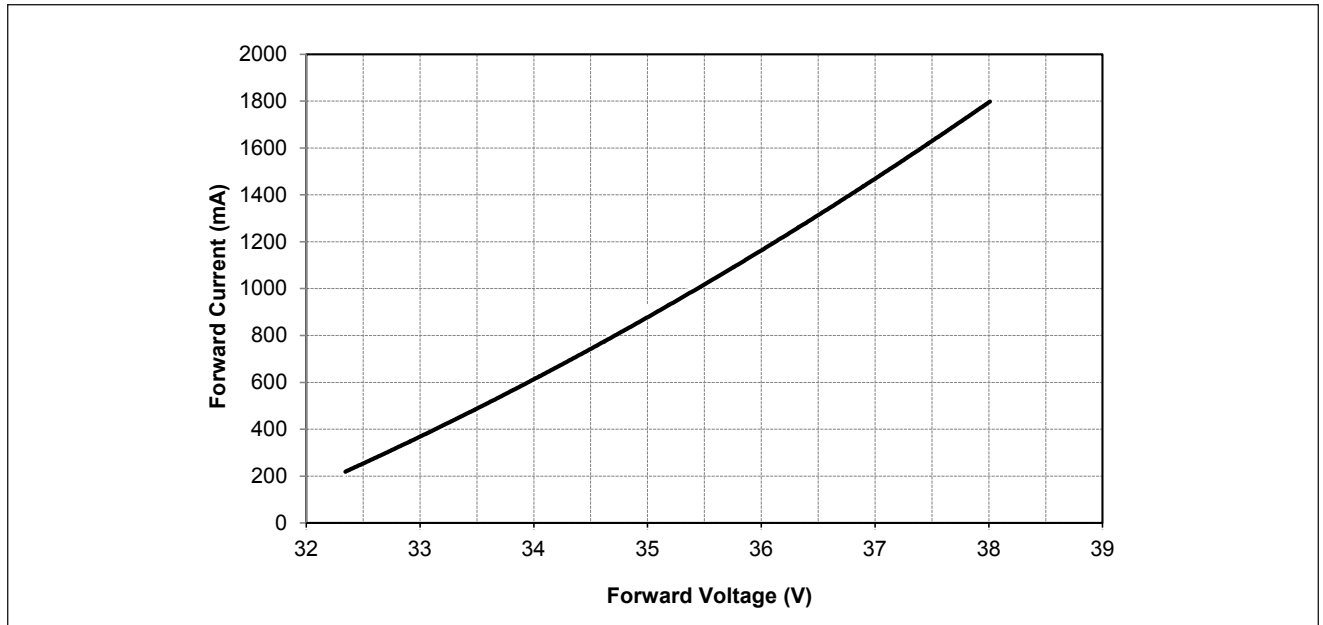


Figure 2: Vero SE 18C Drive Current vs. Voltage ($T_j = T_c = 25^\circ\text{C}$)

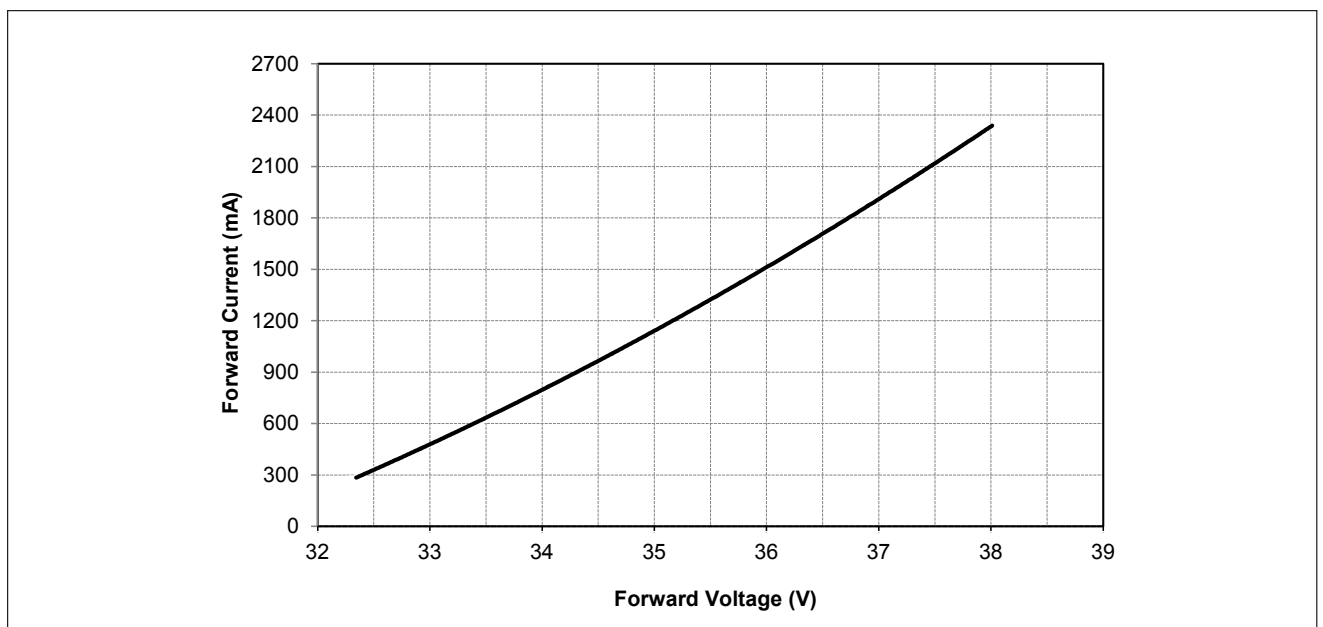

Performance Curves

Figure 3: Vero SE 18D Drive Current vs. Voltage ($T_j = T_c = 25^{\circ}\text{C}$)


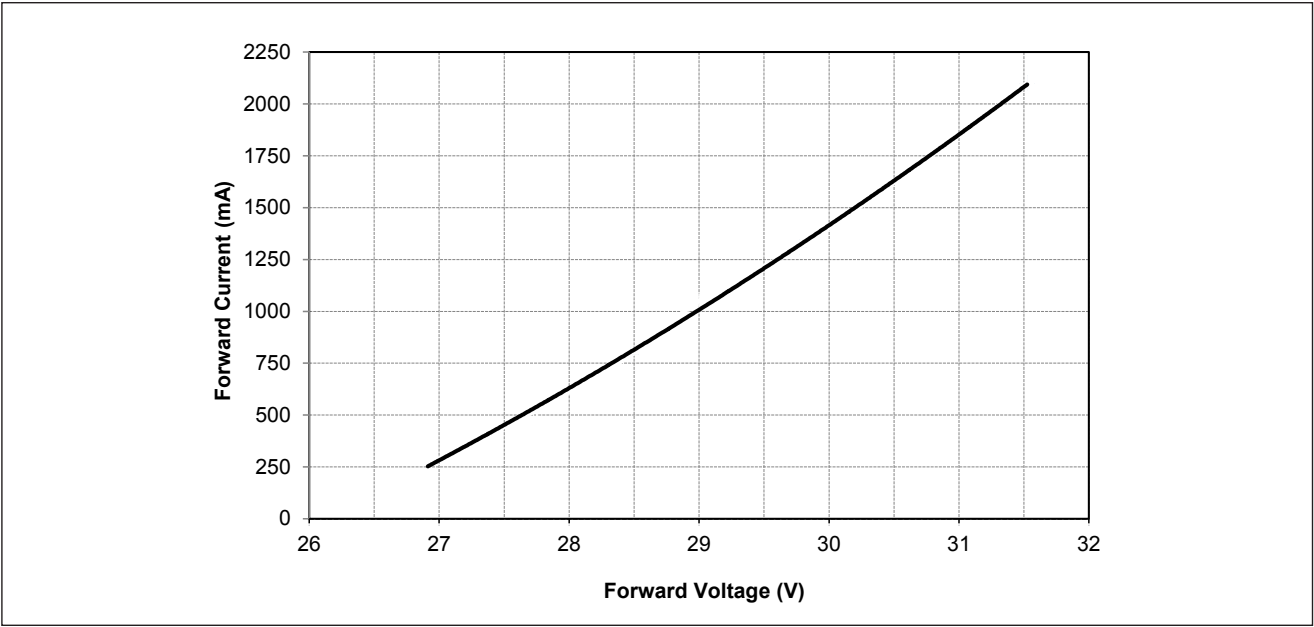


Figure 4: Vero SE 18B Typical Relative Flux vs. Current ($T_j = T_c = 25^{\circ}\text{C}$)

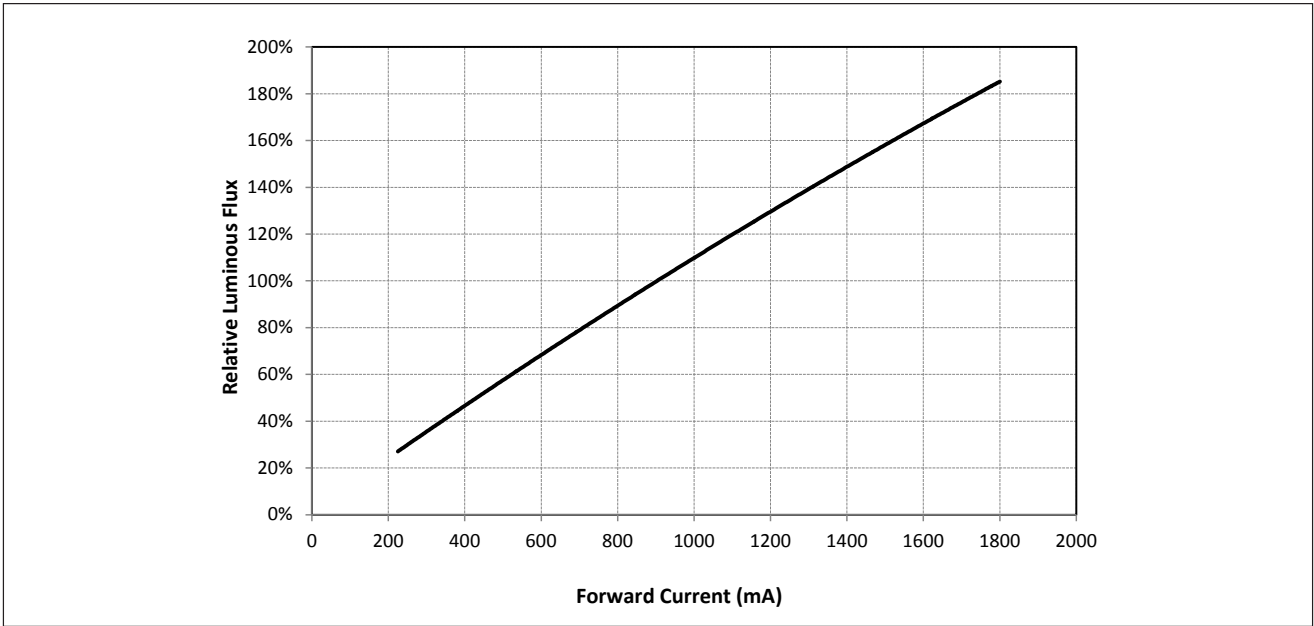

Note for Figure 4:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 5: Vero SE 18C Typical Relative Flux vs. Current ($T_j = T_c = 25^\circ\text{C}$)


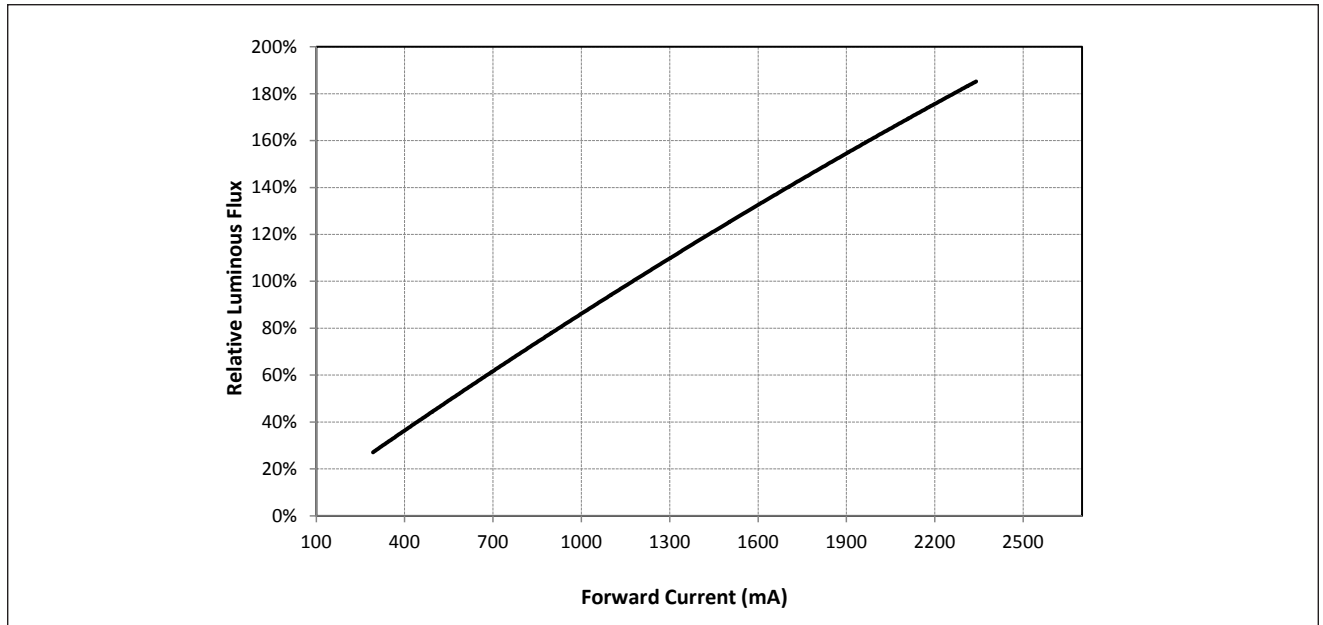


Figure 6 Vero SE 18D Typical Relative Flux vs. Current ($T_j = T_c = 25^\circ\text{C}$)

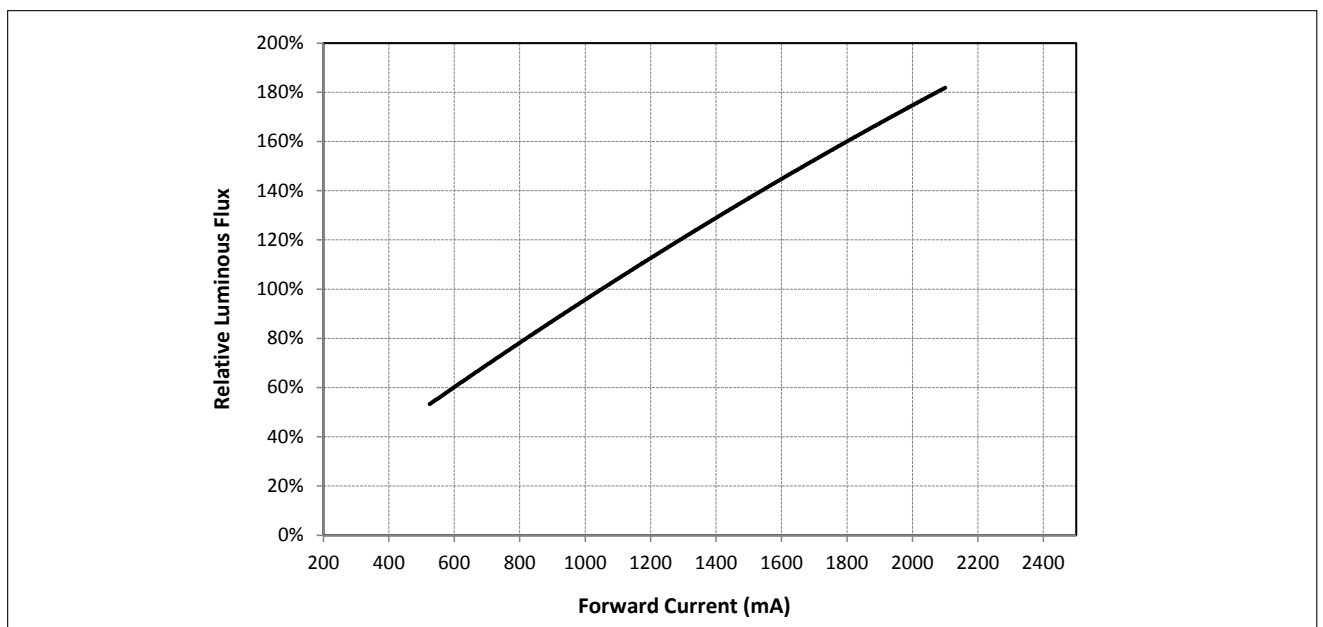

Note for Figures 5 & 6:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 7: Typical DC Flux vs. Case Temperature


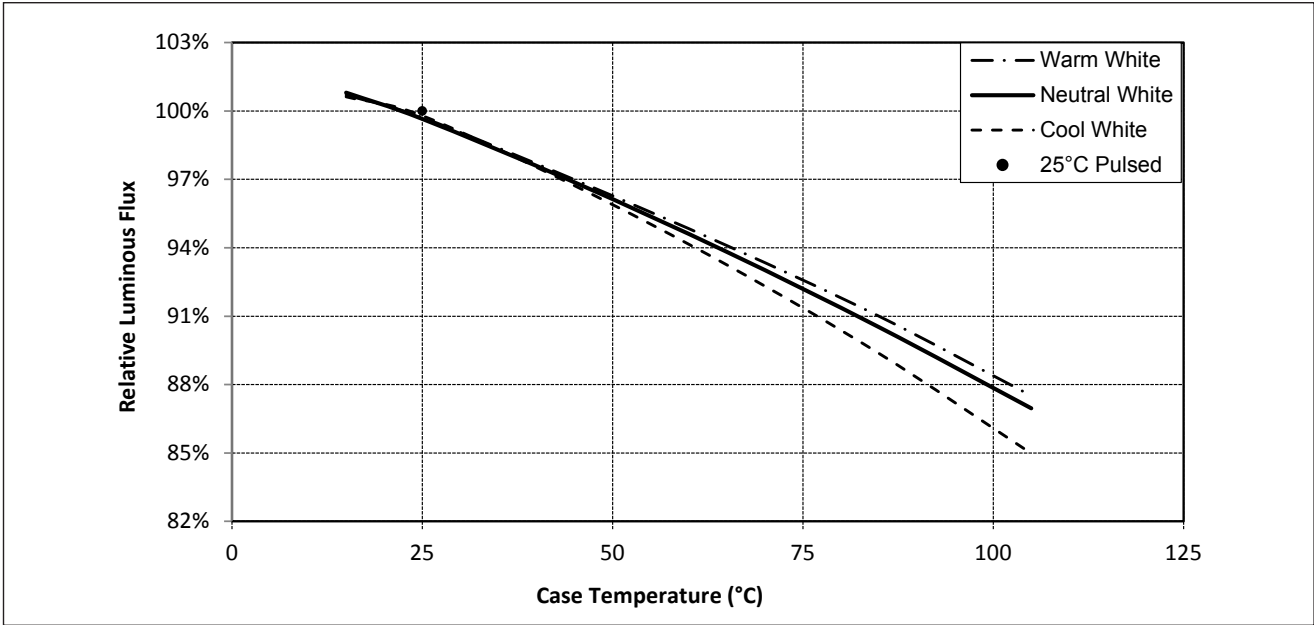


Figure 8: Typical DC ccy Shift vs. Case Temperature

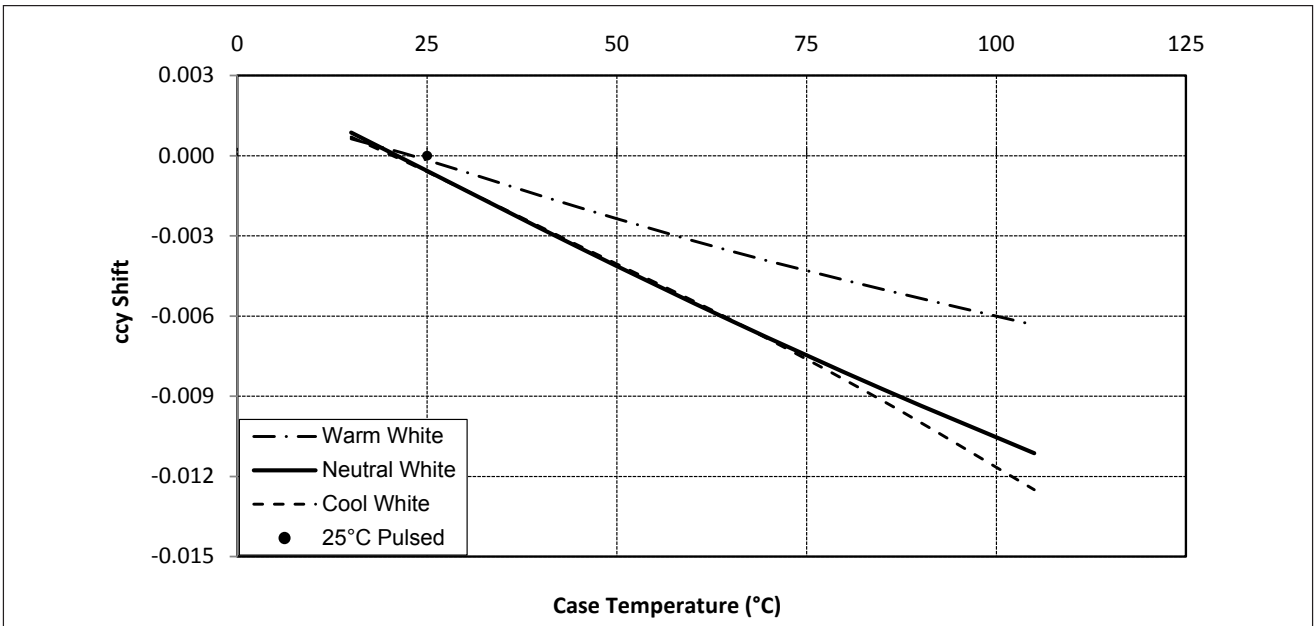


Notes for Figures 7 & 8:

1. Characteristics shown for warm white based on 3000K and 80 CRI.
2. Characteristics shown for neutral white based on 4000K and 80 CRI.
3. Characteristics shown for cool white based on 5000K and 70 CRI.
4. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves

Figure 9: Typical DC ccx Shift vs. Case Temperature

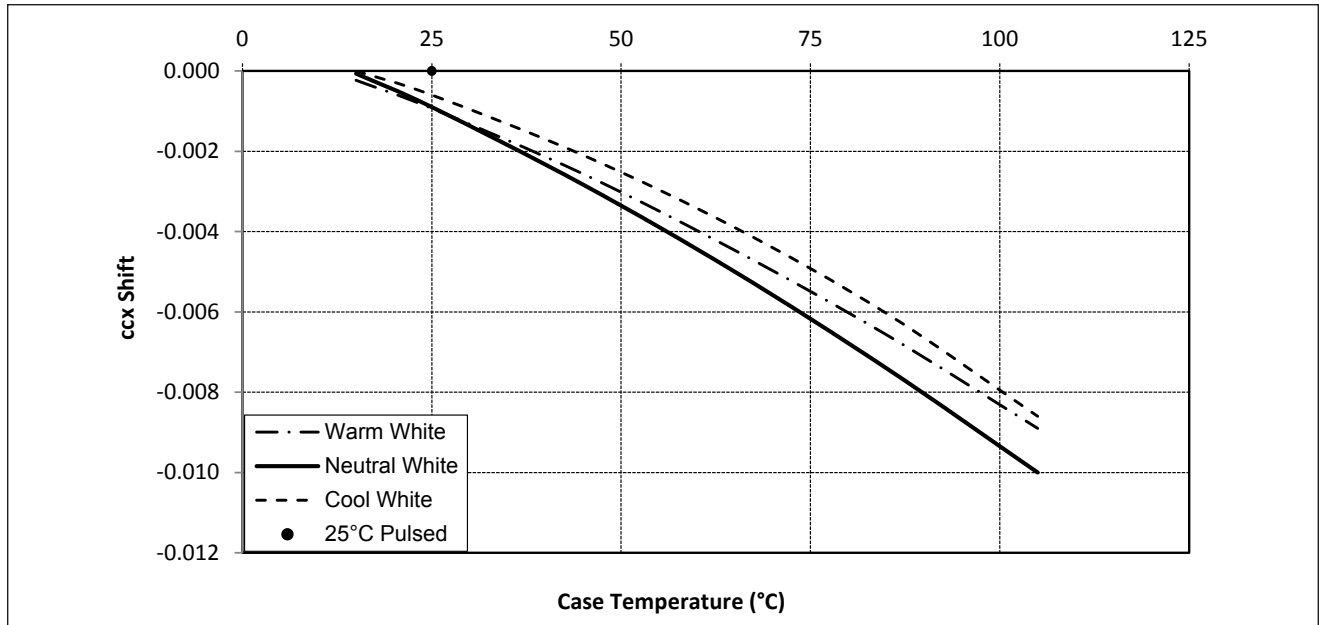


Notes for Figure 9:

1. Characteristics shown for warm white based on 3000K and 80 CRI.
2. Characteristics shown for neutral white based on 4000K and 80 CRI.
3. Characteristics shown for cool white based on 5000K and 70 CRI.
4. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Typical Radiation Pattern


Figure 10: Typical Spatial Radiation Pattern

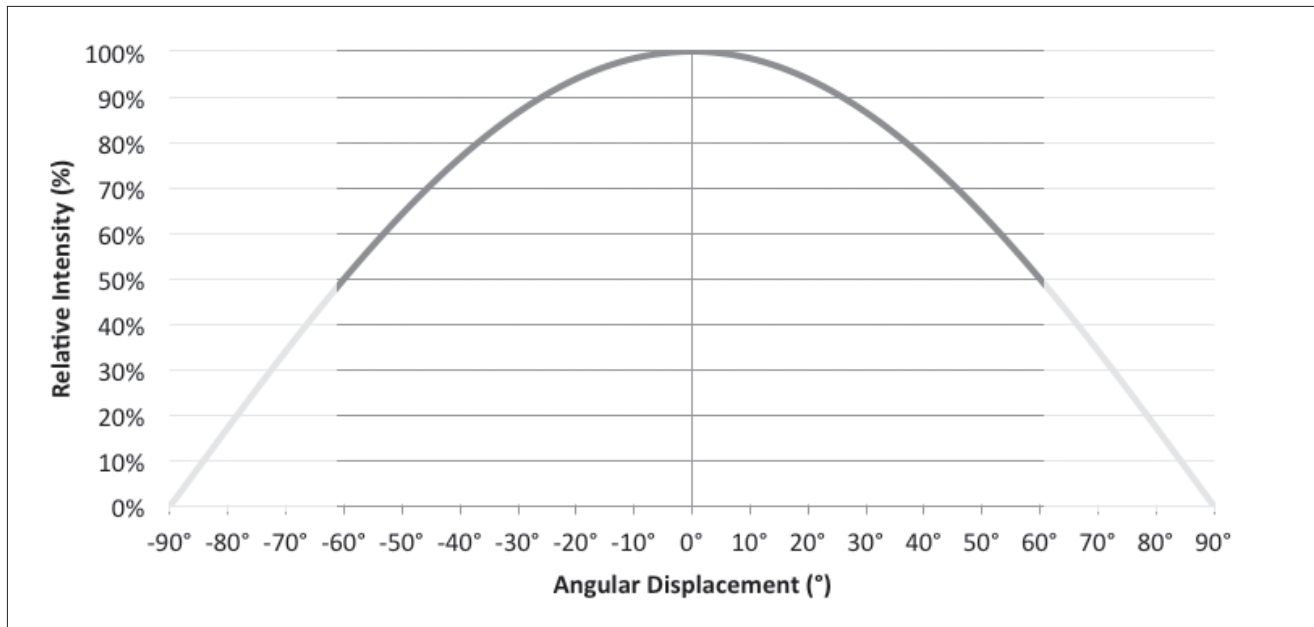

Note for Figure 10:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is $\frac{1}{2}$ of the peak value.

Figure 11: Typical Polar Radiation Pattern

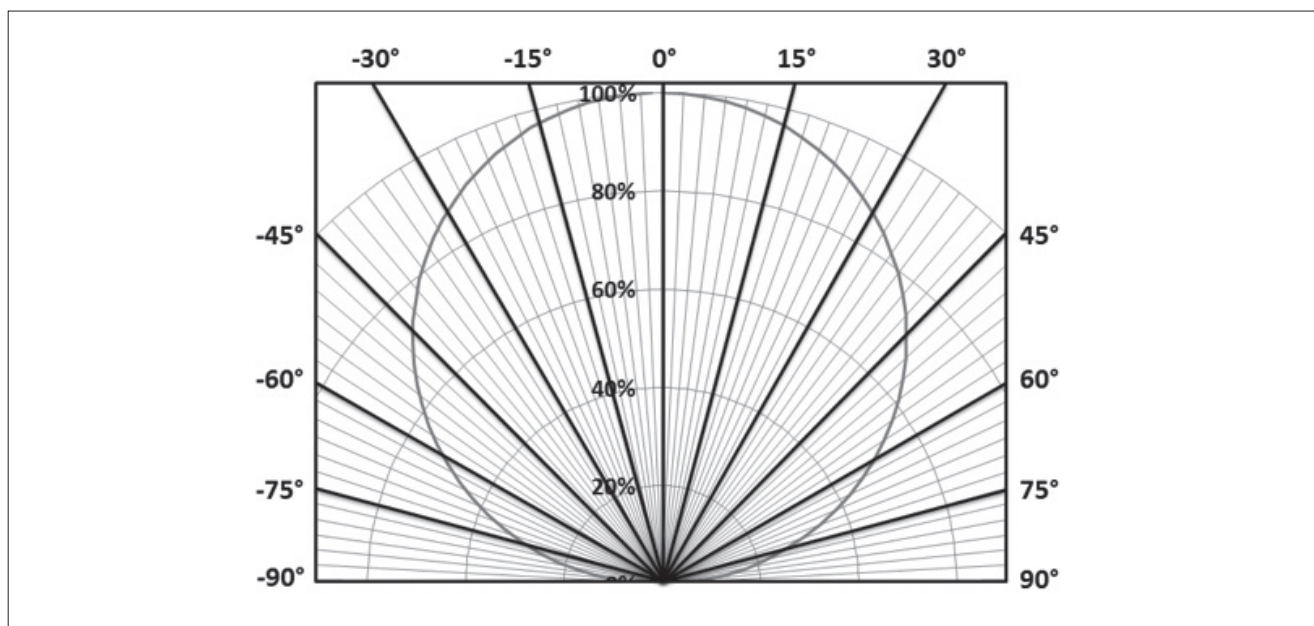

Typical Color Spectrum

Figure 12: Typical Color Spectrum

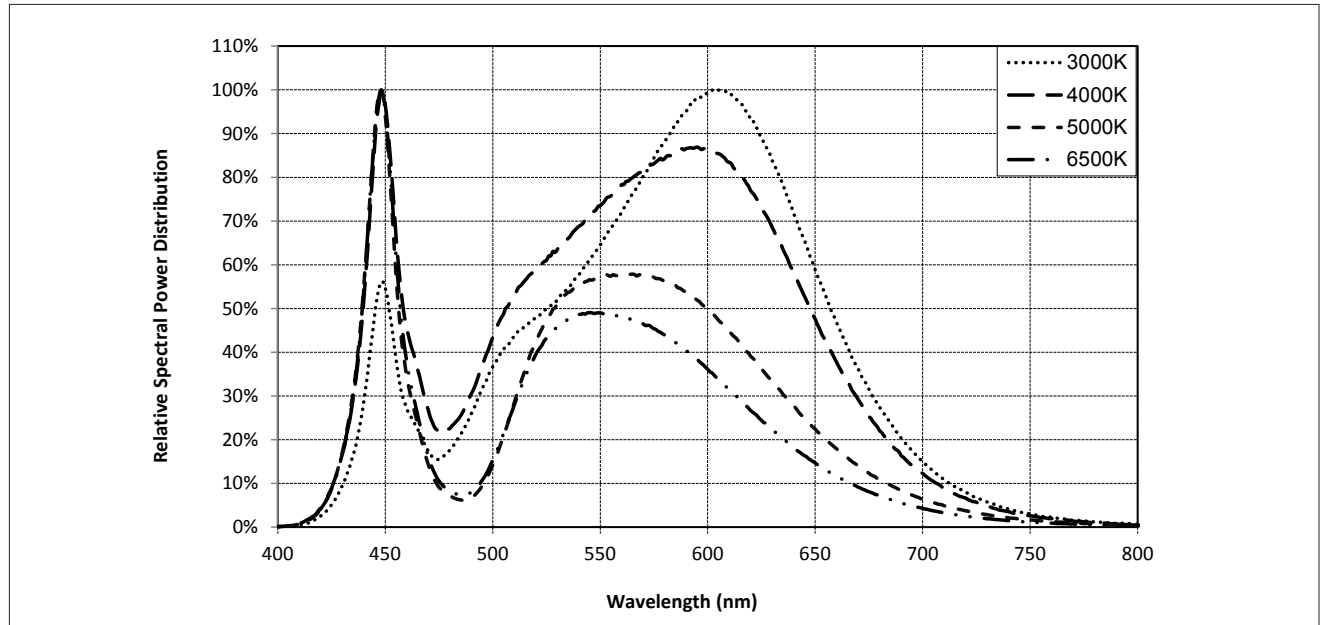


Note for Figure 12:

1. Color spectra measured at nominal current for $T_j = T_c = 25^\circ\text{C}$.
2. Color spectra shown is 3000K and 80 CRI.
3. Color spectra shown is 4000K and 80 CRI.
4. Color spectra shown is 5000K and 70 CRI.
4. Color spectra shown is 6500K and 70 CRI.

Mechanical Dimensions

Figure 13: Drawing for Vero SE 18 LED Array

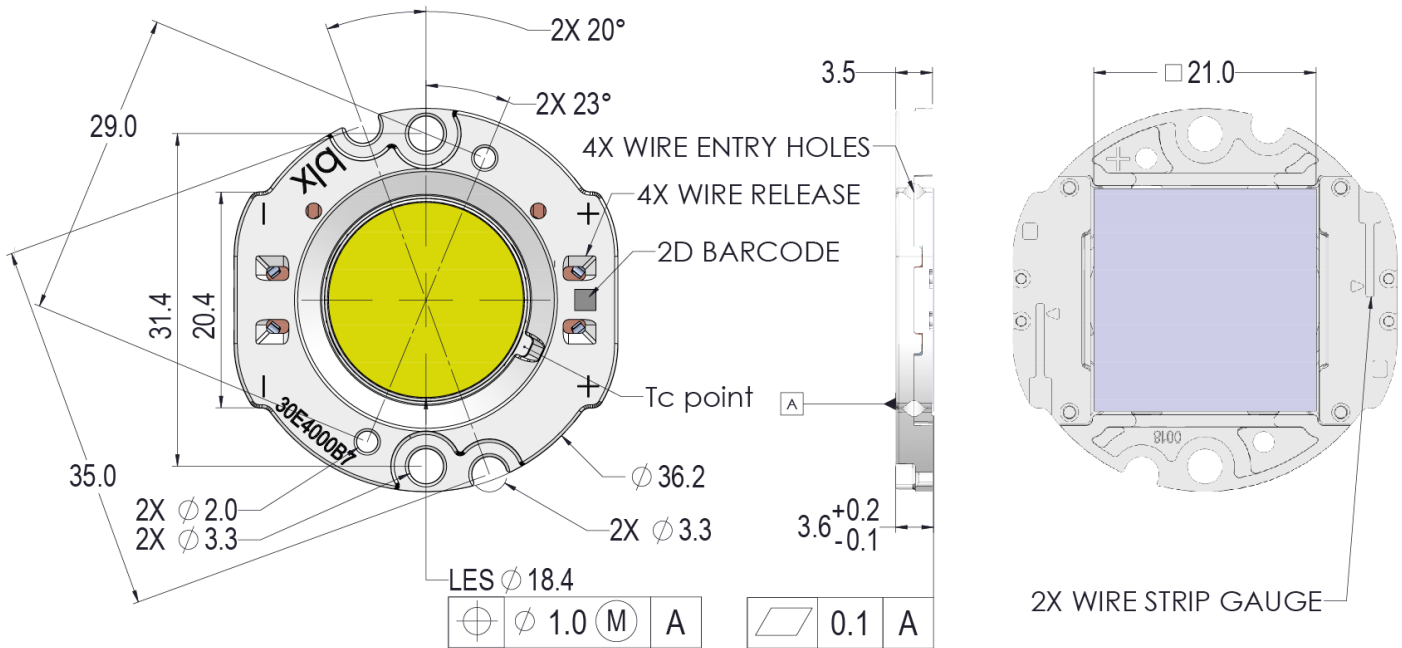


Notes for Figure 13:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are $\pm 0.1\text{mm}$.
4. Mounting holes (2X) are for M2.5 screws.
5. Bridgelux recommends two tapped holes for mounting screws with $31.4 \pm 0.10\text{mm}$ center-to-center spacing.
6. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
7. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of $\pm 0.2\text{mm}$.
8. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.

Color Binning Information

Figure 14: Graph of Warm and Neutral White Test Bins in xy Color Space

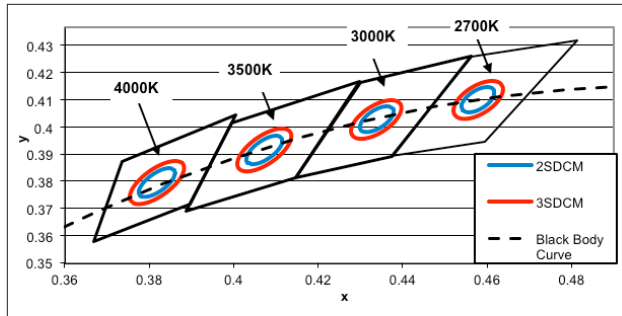


Note: Pulsed Test Conditions, $T_c = 25^\circ\text{C}$

Table 7: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT

Bin Code	2700K	3000K	3500K	4000K
ANSI Bin (for reference only)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)
3 (3 SDCM)	(2651K - 2794K)	(2968K - 3136K)	(3369K - 3586K)	(3851K - 4130K)
2 (2 SDCM)	(2674K - 2769K)	(2995K - 3107K)	(3404K - 3548K)	(3895K - 4081K)
Center Point (x,y)	(0.4578, 0.4101)	(0.4338, 0.403)	(0.4073, 0.3917)	(0.3818, 0.3797)

Figure 15: Graph of Cool White Test Bins in xy Color Space

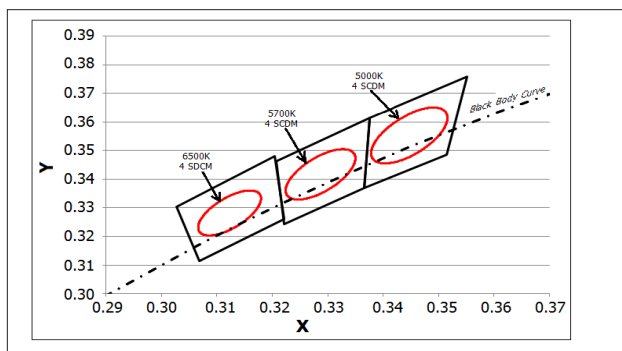


Note: Pulsed Test Conditions, $T_c = 25^\circ\text{C}$

Table 8: Cool White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to $T_c = 85^\circ\text{C}$)

Bin Code	5000K	5700K	6500K
ANSI Bin (for reference only)	(4745K - 5311K)	(5312K - 6022K)	(6022K - 7042K)
4 (4 SDCM)	(4801K - 5282K)	(5829K - 5481K)	(6270K - 6765K)
Center Point (x,y)	(0.3447, 0.3553)	(0.3287, 0.3417)	(0.3123, 0.3282)

Packaging and Labeling


Figure 16: Drawing for Vero SE 18 Packaging Tray

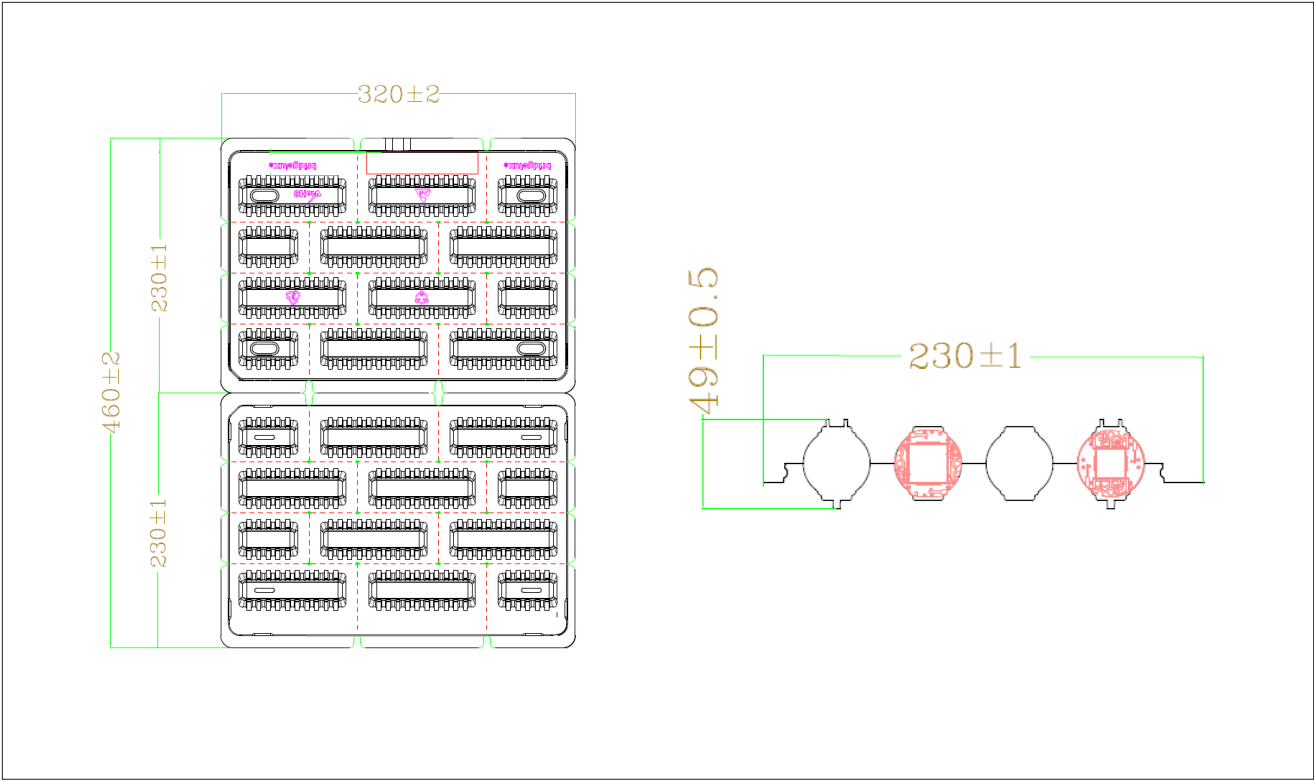

- Notes for Figure 16:
- 1. Dimensions are in millimeters.
 - 2. Drawings are not to scale.

Packaging and Labeling

Figure 17: Vero SE 18 Series Packaging and Labeling

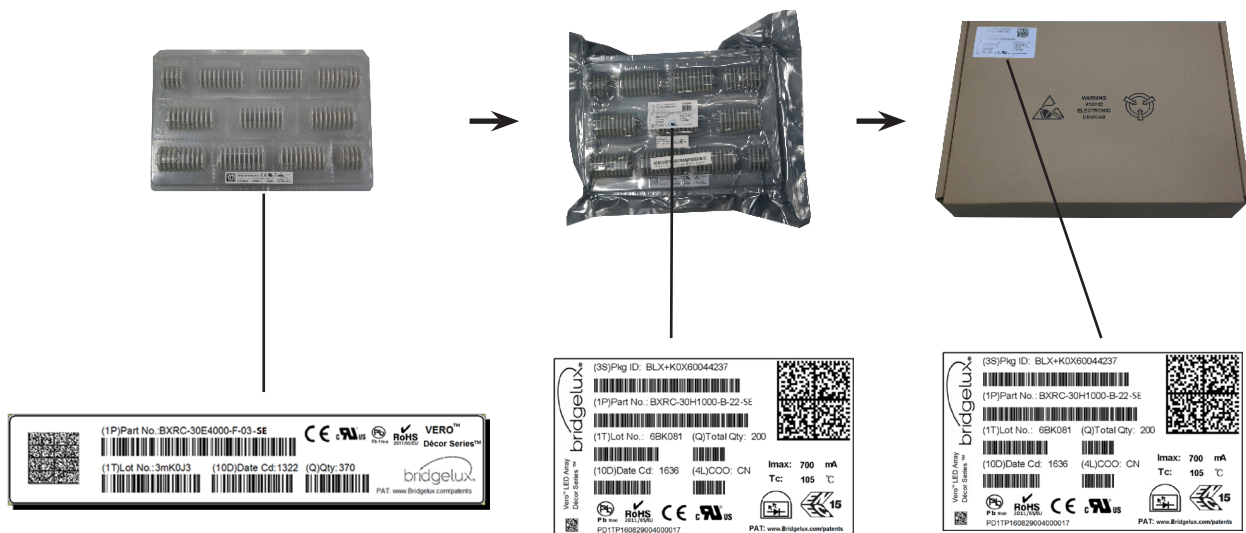

Notes for Figure 17:

1. Each tray holds 100 COBs.
2. Each tray is vacuum sealed in an antistatic bag and placed in its own box.
3. Each tray, bag and box is to be labeled as shown above.

Figure 18: Vero SE Product Labeling

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Design Resources

Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit www.bridgelux.com.

3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

LM80

LM80 testing is ongoing. Please contact your Bridgelux sales representative for more information.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN31 for additional information.

CAUTION: RISK OF BURN

Do not touch the Vero SE LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vero SE LED array may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the plastic housing of the Vero SE LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

About Bridgelux: We Build Light That Transforms

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
www.linkedin.com/company/bridgelux-inc-_2
WeChat ID: BridgeluxInChina



101 Portola Avenue
Livermore, CA 94551
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2016 Bridgelux, Inc. All rights reserved 2016. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design and Vero are registered trademarks, and Décor Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux Vero SE 18 Array Product Data Sheet DS122 Rev. A (10/2016)