

## H/I-Series Toggle Switches



General purpose workhorses with options tailored to meet most any need. Ratings to 17A 125VAC, various actuator, bushing, termination, and circuit choices easily integrates into a variety of different applications. The H/I-Series has a storied history in the Food service, Generator, Industrial Control, and Office Automation markets and are appropriate for usage in low voltage DC applications as well.

### Dielectric Strength

UL/CSA: 1000V - live to dead metal & opposite polarity

### Electrical Life

50,000 cycles- maintained  
25,000 cycles- momentary



### Mechanical Life

100,000 cycles

### Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

### H/I-Series Dimensional Specifications: in.[mm]

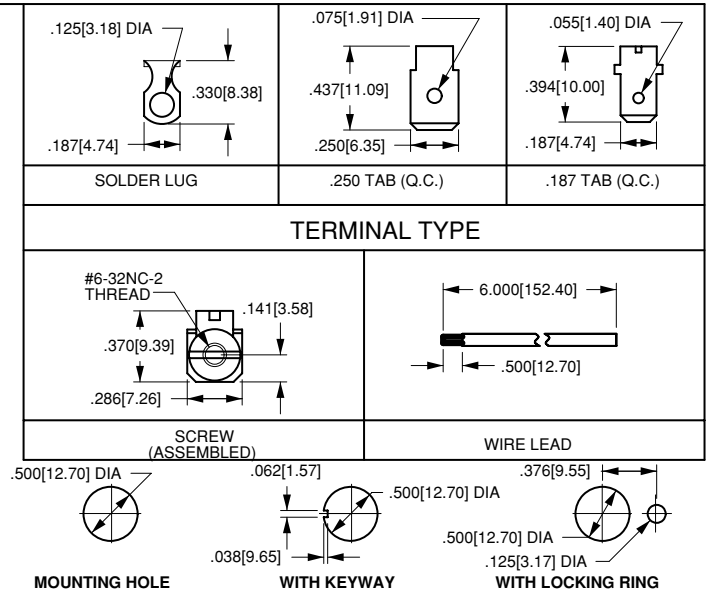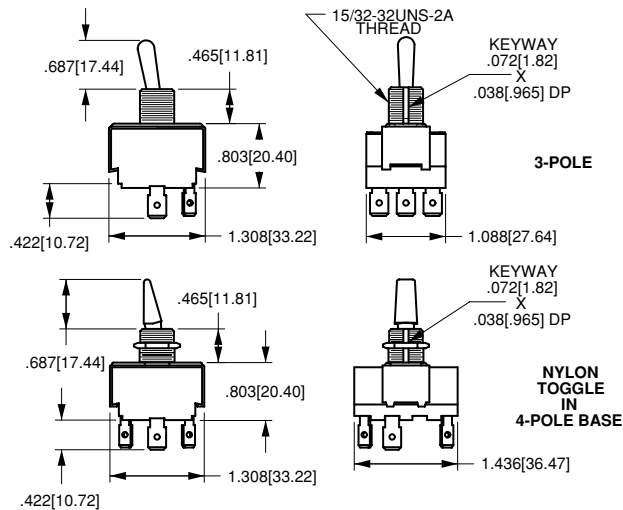

# HK251

1  
Base Part Number

# 73

2  
Toggle Style

### 1 BASE PART NUMBER: SERIES/POLES/RATING/CIRCUITRY/TERMINATION

10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC<sup>2</sup>

#### three pole

solder lug	.250 tab	screw term.
HK250	HK251	HK254
HK25A	HK25B	HK25E
HK25L	HK25M	HK25S
HL250	HL251	HL254
HL25A	HL25B	HL25E
HM250	HM251	HM254
HM25A	HM25B	HM25E
HM25L	HM25M	HM25S

#### four pole

solder lug	.250 tab	screw term.
IK250	IK251	IK254
IK25A	IK25B	IK25E
IK25L	IK25M	IK25S
IL250	IL251	IL254
IL25A	IL25B	IL25E
IM250	IM251	IM254
IM25A	IM25B	IM25E
IM25L	IM25M	IM25S

### 2 BAT STYLE TOGGLE<sup>1</sup>

unsealed	sealed	toggle length	bushing length
73	78	0.687	0.465
E3	E8	2.000	0.465

#### NOTES

- Additional toggle options available. Consult factory for details.
- Additional ratings available. Consult factory for details.
- Consult factory for .187 tab and wire lead termination callouts.