

CHEMTRONICS®

Technical Data Sheet

TDS # 7200

Flux-Off® CZ Flux Remover

PRODUCT DESCRIPTION

Flux-Off® CZ Flux Remover is a highly effective cleaner for removing rosin-based fluxes from electronic components and assemblies. Utilizing Cirozane™, which is based on new **HFE technology**, this nonflammable, non-ozone depleting aerosol quickly removes flux without harming sensitive materials.

- Quickly removes all rosin-based flux residues
- Excellent material compatibility
- Evaporates quickly
- Leaves no residues
- Has low odor
- Penetrates tight tolerance areas
- Also removes oil, grease, and ionic residues
- Contains no CFCs, HCFCs or 1,1,1 Trichloroethane

TYPICAL APPLICATIONS

Flux-Off® CZ Flux Remover eliminates flux residues and cleans:

- Through-hole Circuit Boards
- Surface Mount Pads
- Chip Carriers
- Ball Grid Arrays
- Switches
- SMT Components
- Metal or Plastic Housings

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

Boiling Point	90°F (Initial)
Specific Gravity (water = 1@ 77°F)	1.50
Flash Point (TCC)	None to Boiling
Evaporation Rate (Butyl acetate=1)	>1
Kauri-Butanol (KB) Number	36
Appearance	Clear, colorless liquid
Odor	Ethereal Odor
Surface Tension (dynes/cm @ 25°C)	12.2
Solubility in Water	Negligible
Dielectric Breakdown (ASTM D-877)	7 kV
Shelflife	Aerosols 5 years Liquids 2 years after opening
RoHS/WEEE Status	

COMPATIBILITY

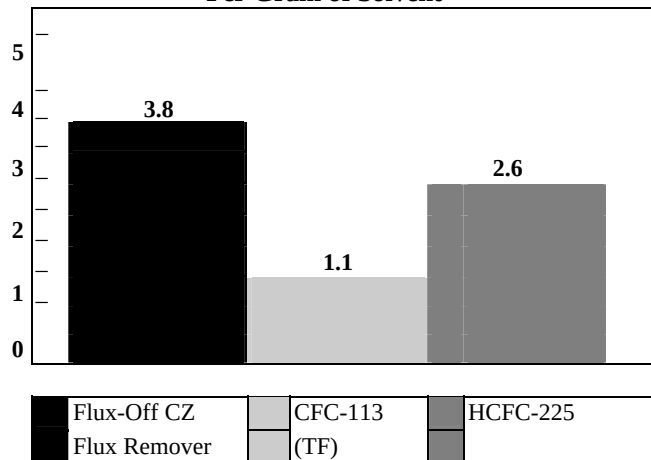
Flux-Off® CZ Flux Remover is generally compatible with most materials used in the electronics industry. With any cleaning agent compatibility solvent/component must be determined on a non-critical area prior to use.

Material**Compatibility**

ABS	Excellent
Buna-N	Excellent
EPDM	Excellent
Graphite	Excellent
HDPE	Excellent
Kynar™	Excellent
LDPE	Excellent
Lexan™	Good
Neoprene	Excellent
Noryl	Excellent
Nylon™ 66	Excellent
Cross-Linked PE	Excellent
Polypropylene	Excellent
Polystyrene	Good
PVC	Excellent
Silicone Rubber	Excellent
Teflon™	Excellent
Viton™	Excellent

COMPETITIVE ASSESSMENT

Milligrams of Rosin Flux Removed
Per Gram of Solvent

**NOTE:**

This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly.

CHEMTRONICS® does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

AVAILABILITY

ES7200	12 oz. Aerosol
ES7208B	5 oz. Brush Clean System
ES7201	1 Gallon Liquid

TECHNICAL & APPLICATION ASSISTANCE

Chemtronics® provides a technical hotline to answer your technical and application related questions. The toll free number is:

1-800-TECH-401.

USAGE INSTRUCTIONS

For industrial use only.

Read MSDS carefully prior to use.

Spray 4-6 inches from surface to clean. Wash parts from top to bottom, allowing the liquid to flush away flux residues, dirt and dissolved oil. For precise application use attached extension tube.

MANUFACTURED BY:

ITW CHEMTRONICS

8125 COBB CENTER DRIVE

KENNESAW, GA 30152

1-770-424-4888

REV. G (06/06)

Flux-Off® and Chemtronics® are registered trademarks of ITW Chemtronics. All rights reserved.

Cirozane™, is a trademark of ITW Chemtronics. All rights reserved.

DISTRIBUTED BY: