

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 512321

COMPACT ROCKER SWITCH

GR Series

Features

- Economical 15 amp switching
- Lighted and non-lighted versions
- Available in a wide variety of colors
- Single- and double-throw options
- Optional wire leads available
- Mechanical life: min. 50,000 operations

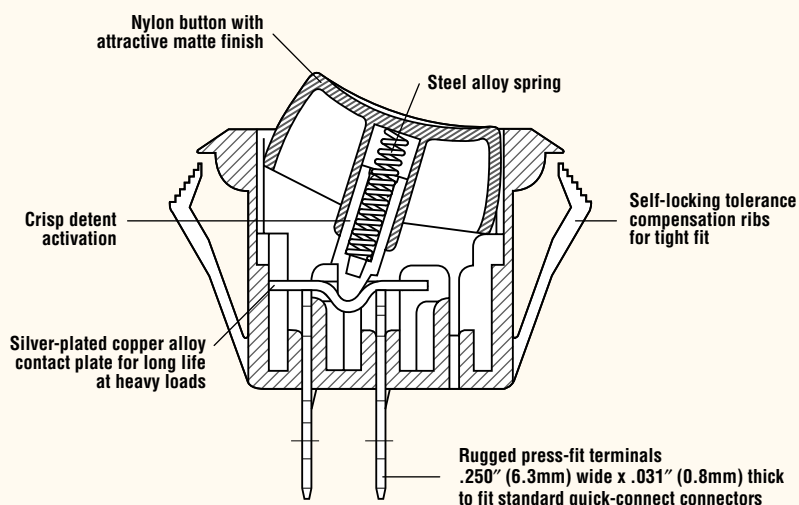

Electrical Ratings

Switch Series	EN61058 Rating	UL1054 Rating	Electrical Life at Rated Load	
			According to VDE (Min. Operations)	According to UL (Min. Operations)
GR	N/A	15A, 125VAC; 10A, 250VAC	N/A	6,000

Specifications

Electrical


Dielectric Strength:	1000VAC for 1 minute
Insulation Resistance:	10 ⁸ ohms min at 500VDC
Initial Contact Resistance:	.020 ohms max
Temperature Range:	-20°C to +85°C

Materials

Actuator (non-lighted):	Nylon 66 94V-2
Actuator (lighted):	Polycarbonate
Housing:	Nylon 66 94V-2
Base:	Nylon 66 94V-2
Spring:	Steel Wire
Contact Plate:	Copper Alloy
Terminals:	Tin-Plated Copper Alloy



Dimensions inches (mm)

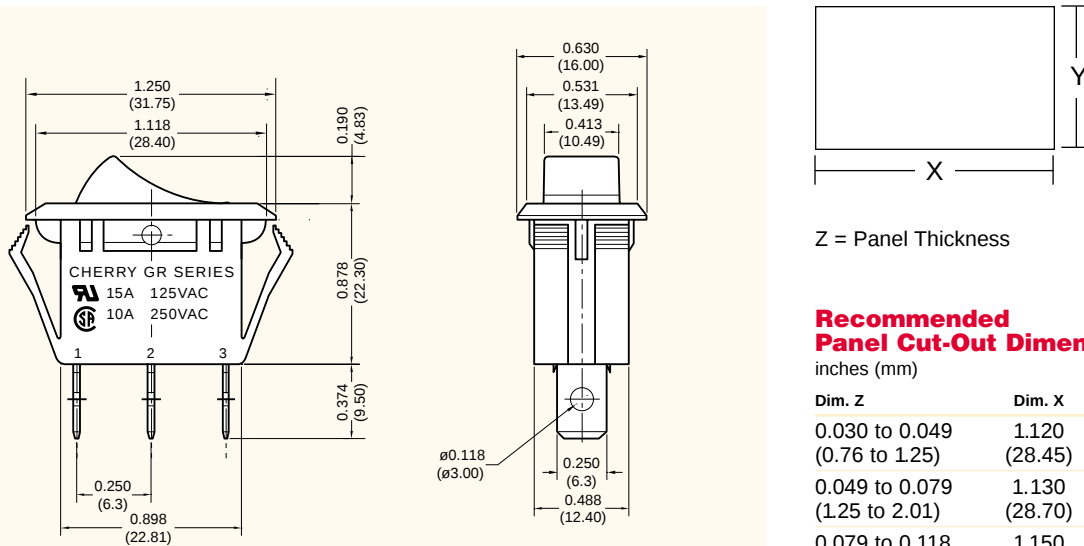

Recommended Panel Cut-Out Dimensions inches (mm)

Dim. Z	Dim. X	Dim. Y
0.030 to 0.049 (0.76 to 1.25)	1.120 (28.45)	0.535 (13.59)
0.049 to 0.079 (1.25 to 2.01)	1.130 (28.70)	0.535 (13.59)
0.079 to 0.118 (2.01 to 3.00)	1.150 (29.21)	0.535 (13.59)

Examples of Common Part Numbers and Descriptions inches (mm)

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/ Housing Color	Legend Marking
GRF22N2BBBNN		On – Off	0.250 (6.3) Quick-Connect	Black/ Black	
GRF22N2FBBNN		On – Off	0.250 (6.3) Quick-Connect	Black/ Black	
GRF23N2BBBNN		On – On	0.250 (6.3) Quick-Connect	Black/ Black	
GRF22N2BBRLN		On – Off/Lighted	0.250 (6.3) Quick-Connect	Red/ Black	

Ordering Information

GR Series	F Code F 15A, 125VAC (UL, CSA) 10A, 250VAC (UL, CSA)	2 Code 2 Single-Pole	2 Code 2 On – Off 3 On – On	N Code 2 Curve	F Code B Blank C LO HI D HO NO E O I F O — K OFF ON	B Code B Black W White Y Grey C Brown	B Code B Black G Green A Amber R Red Y Grey C Brown M Yellow W White	N Code N Non-Lighted L Lighted (Bulb 125VAC) E Lighted (Bulb 250VAC) G Lighted 6VDC Incandescent H Lighted 12VDC Incandescent	N Code N No Splashproof Rocker Boot
---------------------	---	--------------------------------------	---	--------------------------------	---	---	--	---	---