


Single-Pole Rocker Switch

TR Series

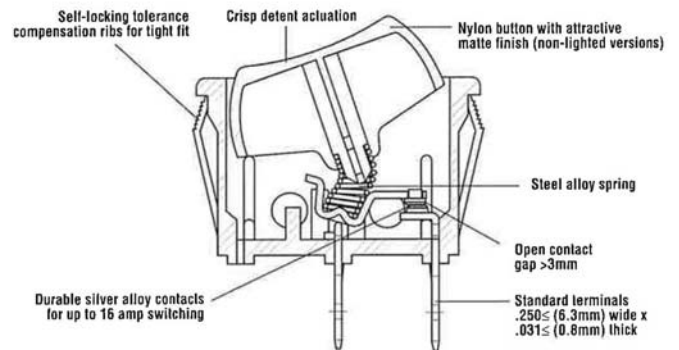

Features

- 16A switching in 1mm wide package
- Lighted and non-lighted
- Maintained action and momentary
- Mechanical life: min. 10,000 operations

Electrical Ratings				
Switch Series	EN61058 Rating	UL1054 Rating	Electrical Life at Rated Load	
			According to VDE (Min. Operations)	According to UL (Min. Operations)
TR	16(4)A, 250V~, T85/55 1E4	16A, 125/250VAC; 1/4HP, 3/4HP 250VAC	10,000	6,000

Electrical Specifications		Material Specifications	
Ratings:	16A, 125/250VAC; 1/4HP; 3/4HP 250VAC (cULus) 16(4)A, 250V~ T85/55 5E4 (VDE)	Actuator (non-lighted):	Nylon 66 94V-2
		(lighted):	Polycarbonate
Dielectric Strength:	1000VAC for 1 minute	Base:	Nylon 66 94V-2
Insulation Resistance:	100M ohms min at 500VDC	Spring:	Steel Wire
Initial Contact Resistance:	0.020 ohms max	Contacts:	Silver Alloy
Temperature Range:	-20°C to + 65°C	Movable Arm:	Silver-Plated Copper Alloy
		Terminals:	Tin-Plated Copper Alloy



RoHS Compliant
UL File No: E23301




Specifications subject to change without notice.



Single-Pole Rocker Switch

TR Series

Dimensions inches (mm)

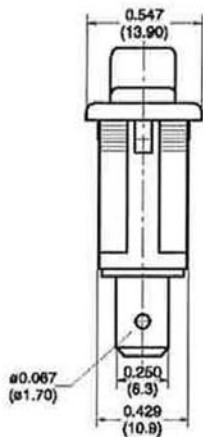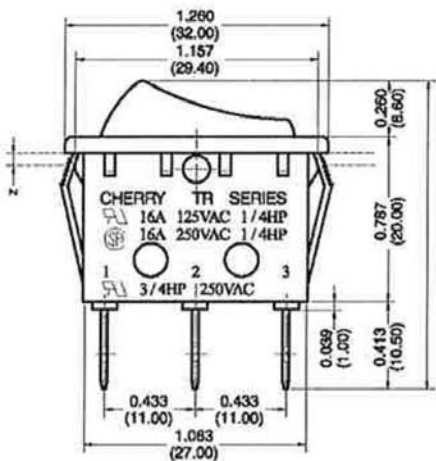

Z = Panel Thickness

**Recommended
Panel Cut-Out Dimensions**
inches (mm)

Dim. Z	Dim. X	Dim. Y
0.030 to 0.049 (0.75 to 1.25)	1.19 (30.23)	0.433 (11.00)
0.049 to 0.079 (1.25 to 2.00)	1.20 (30.46)	0.433 (11.00)
0.079 to 0.118 (2.00 to 3.00)	1.21 (30.73)	0.433 (11.00)

Ordering Information

TR	G	2
Series		Code Circuitry
		2 Single Pole

Code	Contact Rating
G	16A, 125/250VAC; 1/4HP; 3/4HP 250VAC (cULus) 16(4)A, 250V~ T85/55 5E4 (VDE)

Code	Switch Function
2	On - Off
3	On - On
5	(On) - Off
6	(On) - On

Code	Actuator Type
2	Curve
5	Flat Actuator

Code	Actuator Marking
B	Blank
C	 
D	 
E	 
F	 

Code	Housing Color
B	Black
W	White
Y	Grey
E	Charcoal Grey

Code	Actuator Color
A	Amber
B	Black
G	Green
R	Red
W	White
Y	Grey
E	Charcoal Grey

Code	Lighted
N	Non-Lighted
L	Lighted (Bulb 125VAC)
E	Lighted (Bulb 250VAC)
F	Lighted 5VDC Incandescent
G	Lighted 6VDC Incandescent
H	Lighted 12VDC Incandescent

Code	Splashproof
N	No Rocker Boot

Code	Terminal type inches (mm)
F	0.250" (6.3) QC

Examples of Common Part Numbers and Descriptions inches (mm)

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/ Housing Color	Legend Marking
TRG22F2FBNN		On - Off	0.250 (6.3) Quick-Connect	Black/Black	
TRG23F2BBNN		On - On	0.250 (6.3) Quick-Connect	Black/Black	
TRG22F2B8RLN		On - Off/Lighted	0.250 (6.3) Quick-Connect	Red/Black	

Boat #0015-0662

Contact

Call, fax or visit our
Website for more information.

ZF Electronics Corporation
11200 88th Avenue
Pleasant Prairie, WI 53158

Phone: 262.942.6500
Web: www.cherrycorp.com
Email: cep_sales@zf.com
Fax: 262.942.6566

The manufacturer accepts no liability for errors or non-availability, and reserves the right to change specifications without prior notice.

Technical data relates to product specifications only. Features may differ from those described. Only drawings combined with product specifications shall be deemed binding.

© 2007 ZF Electronics Corporation

Last Updated: 022012

CHERRY 