
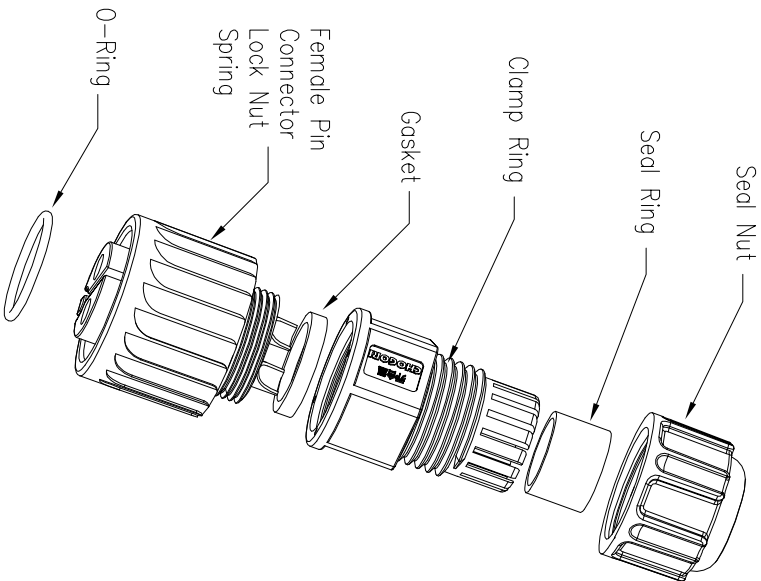
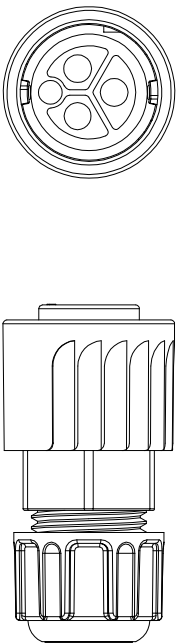


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

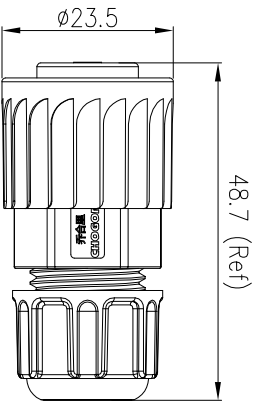


Specification:

- 1.Operation Temperature: -45°C~105°C.
- 2.Insulation Resistance: 100MΩ at DC500V.
- 3.Contact Resistance: <10mΩ.
- 4.Withstand Voltage: 2000V AC
- 5.Operating Current: 20A
- 6.Operating Voltage: AC 300V
- 7.Waterproof Rate: IP67 (Mated)
- 8.Seal Nut: Nylon, Black
- 9.Seal Ring: Silicon, Black.
- 10.Clamp Ring: Nylon, Black
- 11.Gasket: Silicon, Red
- 12.Female Pin: Copper Alloy, Gold Plated
- 13.Connector: Nylon+GF, Black
- 14.Lock Nut: Nylon, Orange
- 15.Spring: SUS
- 16.O-Ring: Silicon, Red
- 17.RoHS Compliant.
- 18.UL Compliant.
- 19.Mating Cap: 804-00007-00

2 Pin	3 Pin
P/N: 23002231-XX	P/N: 23003231-XX
Pin Assignments Front View	

23XXX231-XX Cable Range OD
01 OD: φ3.5mm~φ6.5mm
02 OD: φ6.5mm~φ9.5mm
Pin Number

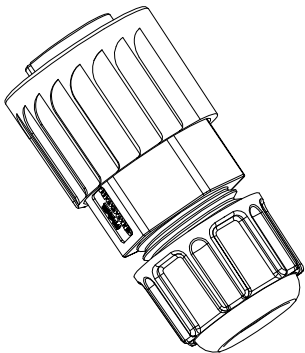

UNIT:mm	DESCRIPTION	PART NO	DRAWN BY	DATE
	Middle Series Push Lock Male Plug With Female Pin	23XXX231-XX	Liu	2019/08/13
TOLERANCE	SCALE: 1:1	DWG NO	CHECKED BY	DATE
.X ±0.25			Mo	2019/08/13
.XX ±0.15				
.XXX ±0.05				
ANGLES ±1°	REV C1	SIZE A4	APPROVED BY Panson	DATE 2019/08/13

CHOGORI®